


# UMK- EC56/25/EX -FRONT 2,5V/L - Termination board



2900115

<https://www.phoenixcontact.com/us/products/2900115>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Termination board, connection 1: Screw connection 25-position, connection 2: ELCO connector 1x 25-position (Pin strip type 8016 (EEx i protection), left)

## Commercial data

Item number	2900115
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	DK2186
GTIN	4046356472258
Weight per piece (including packing)	278.4 g
Weight per piece (excluding packing)	278.4 g
Country of origin	DE

# UMK- EC56/25/EX -FRONT 2,5V/L - Termination board



2900115

<https://www.phoenixcontact.com/us/products/2900115>

## Technical data

### Product properties

Product type	Interface module
Number of positions	25

### Electrical properties

Nominal voltage $U_N$	max. 30 V DC (Max. voltage between two intrinsically safe circuits: 60 V DC)
Max. current carrying capacity per branch	500 mA

### Connection data

#### Field level

Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	9 mm
Screw thread	M2,5
Number of positions	25
Conductor cross-section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section AWG	24 ... 14

#### Controller level

Connection method	ELCO connector
Coding	1-1
Number of connections	1
Number of positions	25
Note	Pin strip type 8016 (Ex i protection), left

### Signaling

Status display present	no
------------------------	----

### Dimensions

#### Item dimensions

Width	77 mm
Height	112.5 mm
Depth	52.5 mm

### Material specifications

Color	green (RAL 6021)
-------	------------------

### Environmental and real-life conditions

#### Ambient conditions

# UMK- EC56/25/EX -FRONT 2,5V/L - Termination board



2900115

<https://www.phoenixcontact.com/us/products/2900115>

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

## Standards and regulations

Standards/regulations	DIN EN 60079-11
-----------------------	-----------------

## Mounting

Mounting type	DIN rail mounting
Assembly note	To separate intrinsically safe and non-intrinsically safe circuits, a gap of least 50 mm must be created between the connection points, e.g., by means of partition plates or spacing.
Mounting position	any

## Notes

Assembly note	The coding pins of the ELCO plugs are coded by default in position 6. It is possible to change the coding of the pins without dismantling the module housing.
Notes on operation	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.


# UMK- EC56/25/EX -FRONT 2,5V/L - Termination board



2900115

<https://www.phoenixcontact.com/us/products/2900115>

## Drawings

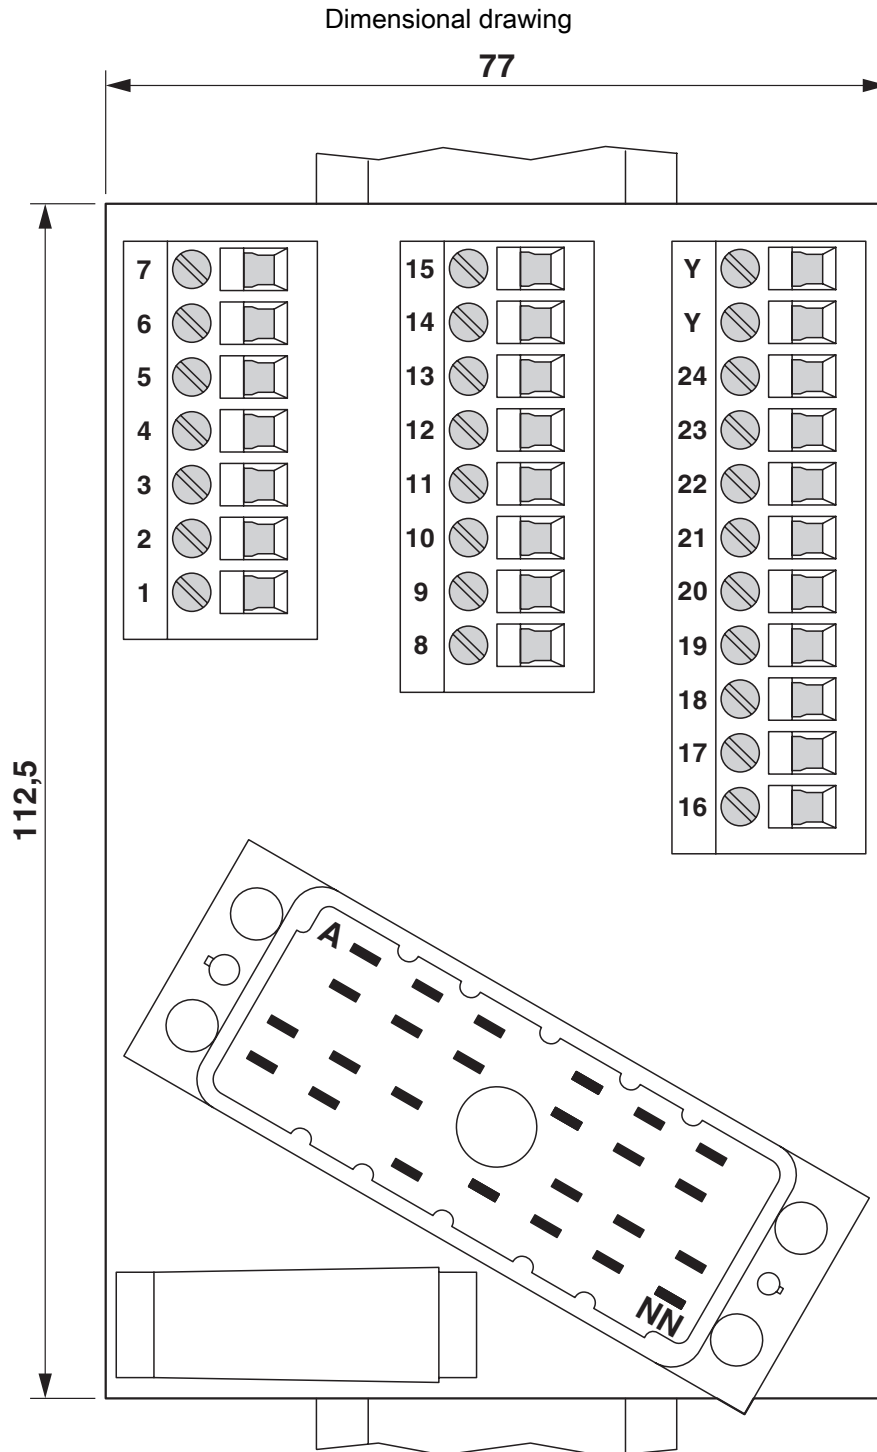

# UMK- EC56/25/EX -FRONT 2,5V/L - Termination board



2900115

<https://www.phoenixcontact.com/us/products/2900115>

## Connection diagram

<b>Terminal block</b>	<b>Pin strip</b>
1	C
2	D
3	E
4	F
5	N
6	P
7	R
8	S
9	a
10	b
11	d
12	j
13	k
14	l
15	s
16	t
17	u
18	v
19	BB
20	CC
21	DD
22	EE
23	MM
24	NN
Y	Y

# UMK- EC56/25/EX -FRONT 2,5V/L - Termination board



2900115

<https://www.phoenixcontact.com/us/products/2900115>

## Classifications

### UNSPSC

UNSPSC 21.0	39121432
-------------	----------

# UMK- EC56/25/EX -FRONT 2,5V/L - Termination board



2900115

<https://www.phoenixcontact.com/us/products/2900115>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)