

TC MGUARD RS2000 4G VPN - Router



2903588

<https://www.phoenixcontact.com/us/products/2903588>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Security appliance with 4G cellular interface, SD card slot, 2 VPN tunnels, firewall for easy configuration, router with NAT/1:1 NAT, 4-port switch, 2 SIM card slots, GPS receiver

Product description

The TC MGUARD... security appliances are industrial mobile network routers with mGuard technology. As such, the routers offer a remote maintenance infrastructure for the secure connection of machines and systems via the Internet. A high-speed mobile network interface and a 4-port switch are integrated into a compact metal housing. Secure remote communication on a global scale takes place via 4G LTE as well as UMTS and CDMA networks. With the help of an SD card as a configuration memory, the devices can be quickly and easily started up or replaced. The devices have a buffered realtime clock and Trusted Platform Module (TPM) for secure key generation and management.

Your advantages

- High-speed cellular interface with provider redundancy
- Integrated 4-port switch
- Maximum security with IPsec protocol on Layer 3
- Web-based management, SNMP
- Replaceable configuration memory
- RS-232 interface with COM server function for integrating serial devices
- Flexible routing
- 2 parallel VPN tunnels
- Supports current certificates such as x509.v3
- Stateful inspection firewall
- Extended temperature rating

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2903588 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | DN25 |
| Product key | DNC424 |
| GTIN | 4046356758109 |
| Weight per piece (including packing) | 639.9 g |
| Weight per piece (excluding packing) | 610 g |
| Customs tariff number | 85176200 |
| Country of origin | DE |

TC MGUARD RS2000 4G VPN - Router



2903588

<https://www.phoenixcontact.com/us/products/2903588>

Technical data

Dimensions

| | |
|--------|--------|
| Width | 45 mm |
| Height | 130 mm |
| Depth | 114 mm |

Notes

Note on application

| | |
|---------------------|-------------------------|
| Note on application | Only for industrial use |
|---------------------|-------------------------|

Material specifications

| | |
|--------------------|-------|
| Material (Housing) | Metal |
|--------------------|-------|

Interfaces

| | |
|-----------------|---|
| Signal | Ethernet |
| Web server | yes |
| Basic functions | Router with simplified 2-click firewall and VPN for 2 tunnels (fixed), metal housing, slot for any SD memory card |

Data: Ethernet interface, 10/100Base-T(X) in accordance with IEEE 802.3

| | |
|---------------------|---------------------------------------|
| Transmission speed | 10/100 Mbps (auto negotiation) |
| Connection method | RJ45 |
| No. of channels | 4 |
| Transmission length | 100 m (shielded twisted pair) |
| Protocols supported | TCP/IP, UDP/IP, FTP, HTTP |
| Auxiliary protocols | ARP, DHCP, PING (ICMP), SNMP V1, SMTP |

Data: V.24 (RS-232) interface in acc. with ITU-T V.28, EIA/TIA-232, DIN 66259-1

| | |
|-----------------------------|--|
| Serial transmission speed | 9.6; 19.2; 38.4; 57.6; 115.2 kbps |
| Connection method | D-SUB 9 plug |
| Transmission length | 15 m |
| File format/coding | UART/NRZ: 8 Data, 1/2 Stop, None/Even/Odd Parity |
| Data flow control/protocols | Software handshake, Xon/Xoff or hardware handshake RTS/CTS |

Wireless

| | |
|-----------------------|---|
| Interface description | GSM / GPRS / EDGE / UMTS / HSPA / LTE (FDD) |
| Frequency range | 800 MHz (LTE B20) |
| | 900 MHz (LTE B8) |
| | 1800 MHz (LTE B3) |
| | 2100 MHz (LTE B1) |
| | 2600 MHz (LTE B7) |
| | 900 MHz (UMTS/HSPA B8) |
| | 1800 MHz (UMTS/HSPA B3) |
| | 2100 MHz (UMTS/HSPA B1) |

TC MGUARD RS2000 4G VPN - Router



2903588

<https://www.phoenixcontact.com/us/products/2903588>

| | |
|---------------------------|---|
| | 900 MHz (2 W (EGSM)) |
| | 1800 MHz (1 W (EGSM)) |
| Data rate | ≤ 100 Mbps (LTE, DL) ≤ 50 Mbps (LTE, UL) |
| Antenna | 50 Ω impedance SMA antenna socket |
| Antenna connection method | SMA (female) |
| SIM Interface | 1.8 volt, 3 volt |
| LTE | CAT3 |
| Network function | 4 time slots for receiving data, 4 time slots for transmitting data. The PIN is saved in the modem. After a voltage interruption, there is automatic redialing into the network. Integrated TCP/IP stack, firewall and VPN support, independent connection establishment. |
| Network check | LED bar graph to display receive quality |
| Protocols supported | GPS (Global Positioning System), GLONASS |
| Country support | Europe |

System properties

Functionality

| | |
|-----------------|---|
| Basic functions | Router with simplified 2-click firewall and VPN for 2 tunnels (fixed), metal housing, slot for any SD memory card |
|-----------------|---|

System requirements

| | |
|--------------------|------------------------|
| Supported browsers | HTTPS support required |
|--------------------|------------------------|

Input data

Digital

| | |
|--------------------------|---------------------|
| Description of the input | Digital input |
| Number of inputs | 3 |
| Voltage input signal | 10 V DC ... 30 V DC |
| Current input signal | 5 mA |

Output data

Signal

| | |
|-----------------------|--|
| Output name | Digital output |
| Number of outputs | 3 |
| Voltage output signal | 10 V DC ... 30 V DC (depending on the operating voltage) |
| Current output signal | ≤ 125 mA (Short-circuit-proof) |

Product properties

| | |
|--------------|--|
| Product type | Security router for the DIN rail |
| Application | Ethernet RS-232 |
| MTTF | 582 Years (SN 29500 standard, temperature 25°C, operating cycle 21%) |

TC MGUARD RS2000 4G VPN - Router



2903588

<https://www.phoenixcontact.com/us/products/2903588>

| | |
|--|---|
| | 271 Years (SN 29500 standard, temperature 40°C, operating cycle 34.25%) |
| | 114 Years (SN 29500 standard, temperature 40°C, operating cycle 100%) |

Insulation characteristics

| | |
|---------------------|---|
| Degree of pollution | 2 |
|---------------------|---|

Security functions

| | |
|--|--|
| 1:1 Network Address Translation (NAT) in the VPN | supported |
| Number of VPN tunnels | 2 (Fixed, Ipsec (IETF standard)) |
| Authentication | X.509v3 certificates with RSA or PSK |
| Data integrity | MD5 SHA-1 |
| Dynamic Host Configuration Protocol (DHCP) support | Server or Relay Agent |
| Filtering | Incoming or outgoing traffic |
| Firewall data throughput | max. 124 Mbps (Router mode, default firewall rules, bidirectional throughput) max. 58 Mbps (Stealth mode, default firewall rules, bidirectional throughput) |
| Firewall rules | Simplified 2-click stateful inspection firewall |
| Basic functions | Router with simplified 2-click firewall and VPN for 2 tunnels (fixed), metal housing, slot for any SD memory card |
| Internet Protocol Security (IPsec) mode | ESP tunnel / ESP transport |
| Link Layer Discovery Protocol (LLDP) | As per protocol 802.2 |
| Network Time Protocol (NTP) client | Client |
| Remote Syslog Logging | on externals server |
| Routing | Standard routing NAT 1:1-NAT Port forwarding |
| Encryption methods | DES, 3DES, AES-128, -192, -256 |
| Virtual private network (VPN) throughput | max. 40 Mbps (Router mode, VPN bidirectional throughput) max. 26 Mbps (Stealth mode, VPN bidirectional throughput) |

Functions

| | |
|--------------------|---|
| Basic functions | Router with simplified 2-click firewall and VPN for 2 tunnels (fixed), metal housing, slot for any SD memory card |
| Supported browsers | HTTPS support required |

Security functions

| | |
|--|--------------------------------------|
| 1:1 Network Address Translation (NAT) in the VPN | supported |
| Number of VPN tunnels | 2 (Fixed, Ipsec (IETF standard)) |
| Authentication | X.509v3 certificates with RSA or PSK |
| Data integrity | MD5 SHA-1 |
| Dynamic Host Configuration Protocol (DHCP) support | Server or Relay Agent |

| | |
|--|---|
| Filtering | Incoming or outgoing traffic |
| Firewall data throughput | max. 124 Mbps (Router mode, default firewall rules, bidirectional throughput) |
| | max. 58 Mbps (Stealth mode, default firewall rules, bidirectional throughput) |
| Firewall rules | Simplified 2-click stateful inspection firewall |
| Basic functions | Router with simplified 2-click firewall and VPN for 2 tunnels (fixed), metal housing, slot for any SD memory card |
| Internet Protocol Security (IPsec) mode | ESP tunnel / ESP transport |
| Link Layer Discovery Protocol (LLDP) | As per protocol 802.2 |
| Network Time Protocol (NTP) client | Client |
| Remote Syslog Logging | on externals server |
| Routing | Standard routing |
| | NAT |
| | 1:1-NAT |
| | Port forwarding |
| Encryption methods | DES, 3DES, AES-128, -192, -256 |
| Virtual private network (VPN) throughput | max. 40 Mbps (Router mode, VPN bidirectional throughput) |
| | max. 26 Mbps (Stealth mode, VPN bidirectional throughput) |

Electrical properties

| | |
|---|------------------------|
| Electrical isolation | VCC // PE |
| Maximum power dissipation for nominal condition | 7.68 W |
| Mains type | Cellular communication |
| Test voltage data interface/data interface | 1 kV (50 Hz, 1 min.) |
| Test voltage data interface/power supply | 1 kV (50 Hz, 1 min.) |

Supply

| | |
|-----------------------------|---|
| Supply voltage range | 11 V DC ... 36 V DC (via pluggable COMBICON screw terminal block) |
| Typical current consumption | < 320 mA (24 V DC) |
| Max. current consumption | < 1.8 A (at 11 V DC (incl. 3 x 125 mA for the outputs)) |

Function

| | |
|------------|----------------------------|
| Management | Web-based management, SNMP |
|------------|----------------------------|

Connection data

Supply

| | |
|---|--|
| Conductor cross-section, flexible, with ferrule, without plastic sleeve | 0.25 mm ² ... 2.5 mm ² |
| Conductor cross-section, flexible, with ferrule, with plastic sleeve | 0.25 mm ² ... 2.5 mm ² |
| Single conductor/terminal point, rigid | 0.2 mm ² ... 2.5 mm ² |
| Single-wire/terminal point, flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross-section, flexible [AWG] | 24 ... 14 |
| Stripping length | 7.00 mm |
| Tightening torque | 0.56 Nm ... 0.79 Nm |

Environmental and real-life conditions

Ambient conditions

| | |
|---|--|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -40 °C ... 60 °C |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C |
| Altitude | ≤ 5000 m (For restrictions, see the manufacturer's declaration for altitude operation) |
| Permissible humidity (operation) | 5 % ... 95 % (non-condensing) |

Standards and regulations

| | |
|---|--------------------|
| Free from substances that could impair the application of coating | VDMA 24364:2018-05 |
|---|--------------------|

Approvals

CE

| | |
|-------------|--------------|
| Certificate | CE-compliant |
|-------------|--------------|

Corrosive gas test

| | |
|----------------|----------------------------------|
| Identification | ISA-S71.04-1985 G3 Harsh Group A |
|----------------|----------------------------------|

Mounting

| | |
|---------------|-------------------|
| Mounting type | DIN rail mounting |
|---------------|-------------------|

EMC data

| | |
|-------------------------------|---|
| Electromagnetic compatibility | Conformance with RED Directive 2014/53/EU |
|-------------------------------|---|

Electrostatic discharge

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
|-----------------------|--------------|

Electrostatic discharge

| | |
|-------------------|-----------------------|
| Contact discharge | ± 6 kV (Test Level 3) |
| Discharge in air | ± 8 kV (Test Level 3) |
| Comments | Criterion B |

Electromagnetic HF field

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-3 |
|-----------------------|--------------|

Electromagnetic HF field

| | |
|-----------------|---------------------------------|
| Frequency range | 80 MHz ... 3 GHz (Test Level 3) |
| Field intensity | 10 V/m |
| Comments | Criterion A |

Fast transients (burst)

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-4 |
|-----------------------|--------------|

Fast transients (burst)

| | |
|-------|-------------------------|
| Input | ± 2.2 kV (Test Level 3) |
|-------|-------------------------|

TC MGUARD RS2000 4G VPN - Router



2903588

<https://www.phoenixcontact.com/us/products/2903588>

| | |
|----------|-------------------------|
| Signal | ± 2.2 kV (Test Level 3) |
| Comments | Criterion B |

Surge current load (surge)

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-5 |
|-----------------------|--------------|

Surge current load (surge)

| | |
|----------|----------------------------------|
| Input | ± 0.5 kV (DC supply) |
| Signal | ± 1 kV (Data line, asymmetrical) |
| Comments | Criterion B |

Conducted interference

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-6 |
|-----------------------|--------------|

Conducted interference

| | |
|-----------------|---------------------|
| Frequency range | 0.15 MHz ... 80 MHz |
| Comments | Criterion A |
| Voltage | 10 V |

Emitted interference


| | |
|--|---|
| Standards/regulations | EN 61000-6-4 |
| Radio interference voltage in acc. with EN 55011 | EN 55011 class A industrial area of application |
| Emitted radio interference in acc. with EN 55011 | EN 55011 class A industrial area of application |

Criteria

| | |
|-------------|--|
| Criterion A | Normal operating behavior within the specified limits. |
| Criterion B | Temporary impairment to operational behavior that is corrected by the device itself. |

Drawings

Schematic diagram

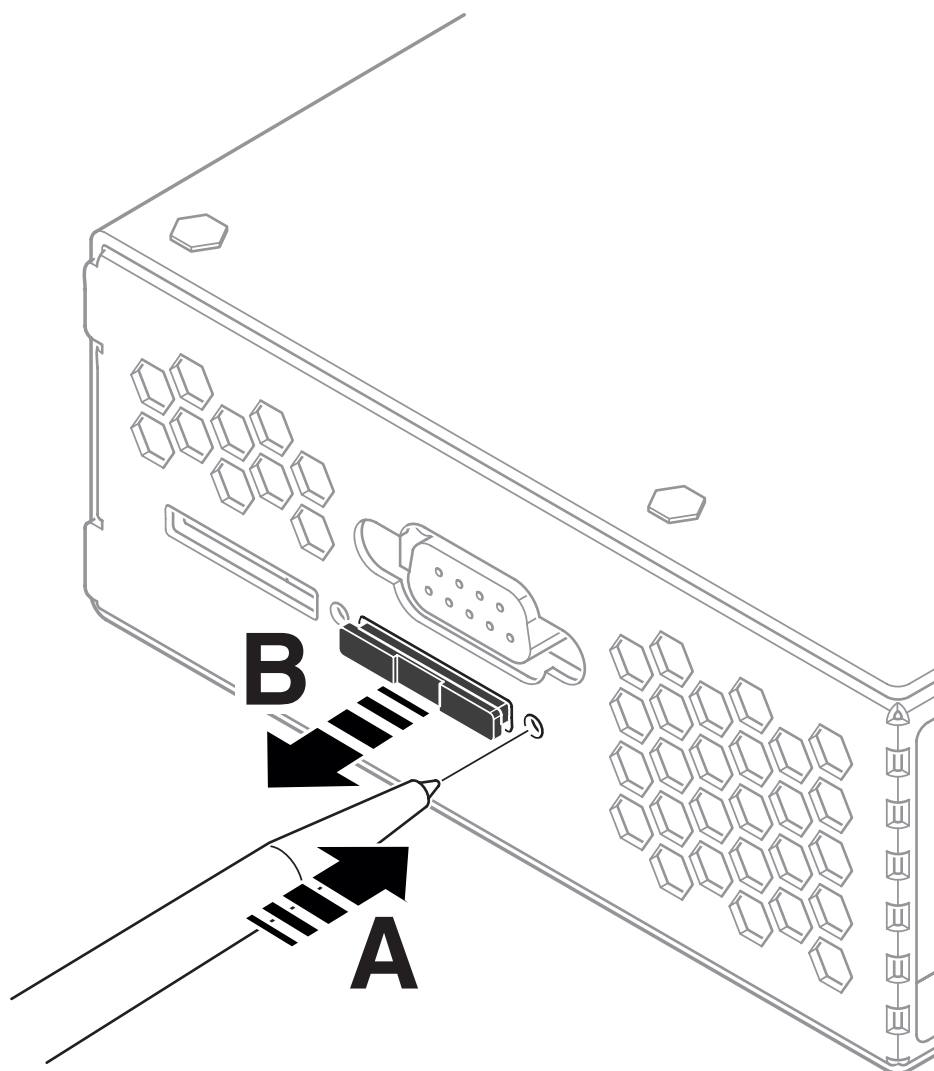


Remove SIM card holder

2903588

<https://www.phoenixcontact.com/us/products/2903588>

Schematic diagram

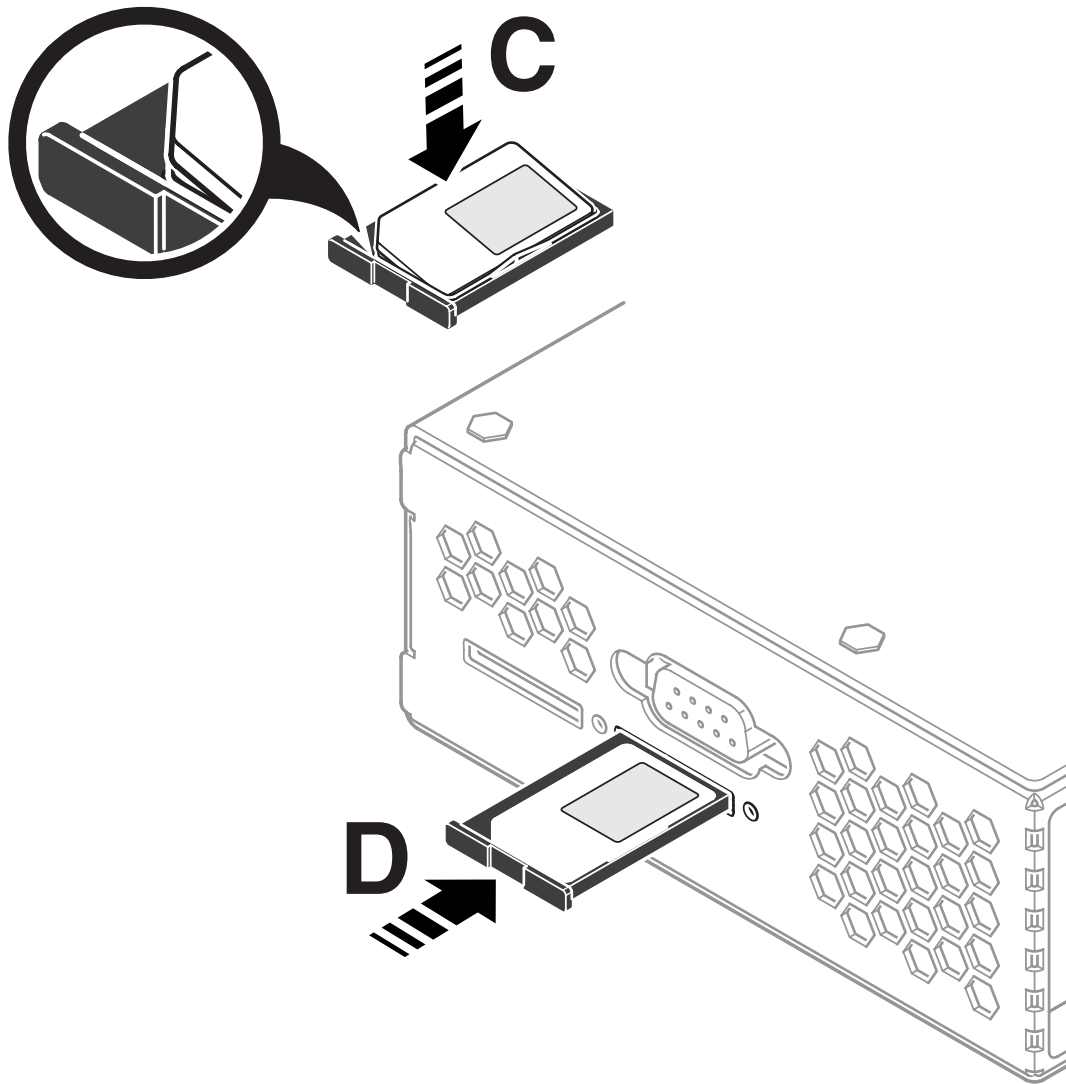

Insert the SIM card


TC MGUARD RS2000 4G VPN - Router

2903588

<https://www.phoenixcontact.com/us/products/2903588>



Schematic diagram

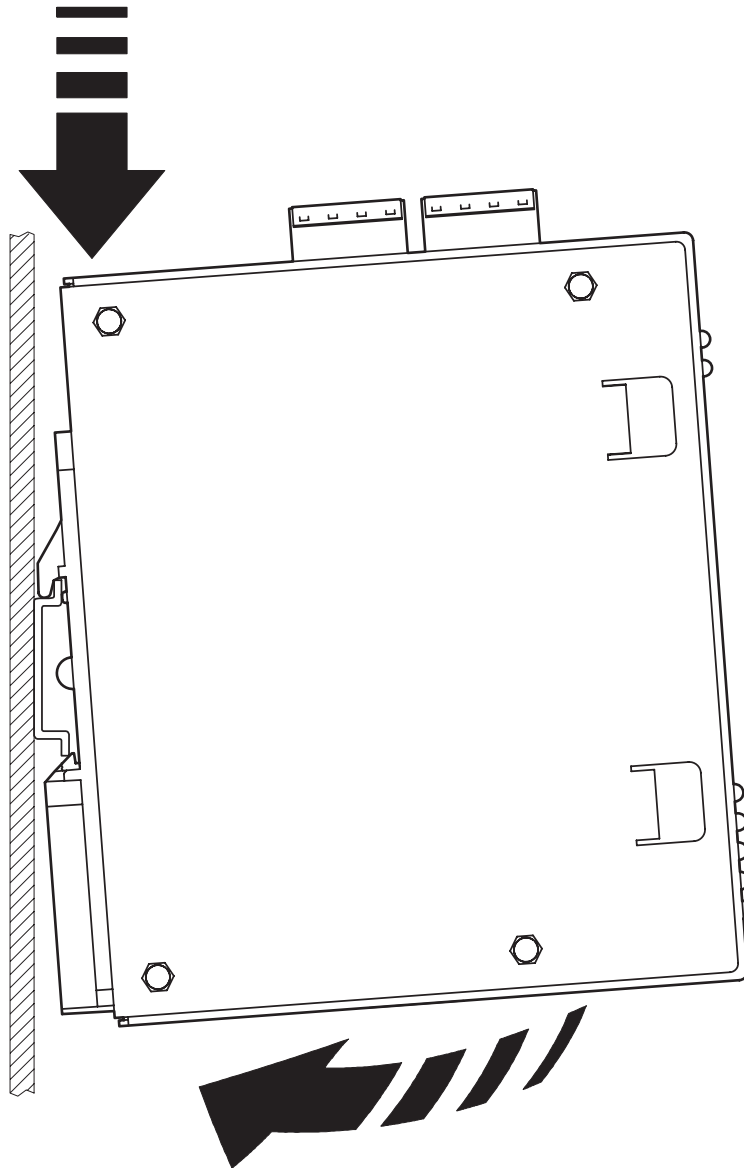

Mounting

TC MGuard RS2000 4G VPN - Router



2903588

<https://www.phoenixcontact.com/us/products/2903588>

Classifications

ECLASS

ECLASS-13.0

19170406

ETIM

ETIM 9.0

EC001478

UNSPSC

UNSPSC 21.0

43222600

TC MGuard RS2000 4G VPN - Router



2903588

<https://www.phoenixcontact.com/us/products/2903588>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c), 7(a), 7(c)-I |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|----------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
|-------------------------------------|----------------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com