

# TTC-6-1X2-24DC-PT - Surge protection device



2906804

<https://www.phoenixcontact.com/us/products/2906804>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Surge protection for a 2-wire floating signal circuit, e.g., 0(4) mA ... 20 mA current loop, HART-compatible. Can be used in safety-related circuits up to SIL 3.



## Your advantages

- Space-saving and cost-saving with a narrow overall width of just 6 mm
- Quick and tool-free installation of surge protective devices, thanks to Push-in connection technology
- Finding the right product for all possible requirements in MCR applications is easy, thanks to the complete range of products with customized features

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 2906804       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | CL23          |
| Product key                          | CL2262        |
| GTIN                                 | 4055626135588 |
| Weight per piece (including packing) | 34 g          |
| Weight per piece (excluding packing) | 34 g          |
| Customs tariff number                | 85363010      |
| Country of origin                    | US            |

# TTC-6-1X2-24DC-PT - Surge protection device



2906804

<https://www.phoenixcontact.com/us/products/2906804>

## Technical data

### Product properties

|                         |                                     |
|-------------------------|-------------------------------------|
| Product type            | Surge protection for MCR technology |
| Product family          | TERMITRAB complete                  |
| IEC test classification | C1                                  |
|                         | C2                                  |
|                         | C3                                  |
|                         | D1                                  |
| Type                    | DIN rail module, one-piece          |
| Wire pairs per module   | 1                                   |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Pollution degree     | 2   |


### Electrical properties

|                       |         |
|-----------------------|---------|
| Nominal voltage $U_N$ | 24 V DC |
|-----------------------|---------|

### Connection data

|                                  |   |
|----------------------------------|---|
| Connection method                | Push-in connection                          |
| Conductor cross-section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross-section rigid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross-section AWG      | 24 ... 12                                   |

### Dimensions
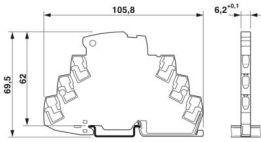
|                     |  |
|---------------------|--|
| Dimensional drawing |  |
| Width               | 6.2 mm +0.1 mm   |
| Height              | 105.8 mm   |
| Depth               | 69.5 mm (incl. DIN rail 7.5 mm)  |

### Material specifications

|  |                       |
|--|-----------------------|
| Color                                  | gray (RAL 7042)       |
|  | light gray (RAL 7035) |
| Flammability rating according to UL 94 | V-0                   |
| Insulating material                    | PBT                   |
| Housing material                       | PBT                   |

### Mechanical properties

# TTC-6-1X2-24DC-PT - Surge protection device



2906804

<https://www.phoenixcontact.com/us/products/2906804>

## Mechanical data

|                 |    |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

## Protective circuit

|   |   |
|---|---|
| Direction of action   | Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground  |
| Nominal voltage $U_N$   | 24 V DC   |
| Maximum continuous operating voltage $U_C$                      | 30 V DC<br>21 V AC  |
| Rated current   | 600 mA (40 °C)  |
| Operating effective current $I_C$ at $U_C$                      | $\leq 5 \mu A$  |
| Protective conductor current $I_{PE}$                           | $\leq 1 \mu A$  |
| Nominal discharge current $I_n$ (8/20) $\mu s$ (line-line)      | 5 kA  |
| Nominal discharge current $I_n$ (8/20) $\mu s$ (line-ground)    | 5 kA  |
| Pulse discharge current $I_{imp}$ (10/350) $\mu s$ (line-line)  | 0.5 kA  |
| Pulse discharge current $I_{imp}$ (10/350) $\mu s$ (line-earth) | 0.5 kA  |
| Total discharge current $I_{Total}$ (8/20) $\mu s$              | 10 kA   |
| Voltage protection level $U_p$ (line-line)                      | $\leq 55 V$ (C1 - 1 kV / 500 A)<br>$\leq 65 V$ (C2 - 10 kV / 5 kA)<br>$\leq 50 V$ (C3 - 25 A)<br>$\leq 55 V$ (C3 - 100 A)     |
| Voltage protection level $U_p$ (line-earth)                     | $\leq 750 V$ (C1 - 1 kV / 500 A)<br>$\leq 750 V$ (C2 - 10 kV / 5 kA)<br>$\leq 700 V$ (C3 - 25 A)<br>$\leq 750 V$ (C3 - 100 A) |
| Voltage protection level $U_p$ static (line-line)               | $\leq 50 V$ (C1 - 1 kV / 500 A)<br>$\leq 65 V$ (C2 - 10 kV / 5 kA)  |
| Voltage protection level $U_p$ static (line-earth)              | $\leq 750 V$ (C1 - 1 kV / 500 A)<br>$\leq 750 V$ (C2 - 10 kV / 5 kA)  |
| Response time $t_A$ (line-line)                                 | $\leq 1 ns$   |
| Response time $t_A$ (line-earth)                                | $\leq 100 ns$   |
| Input attenuation aE, sym.                                      | typ. 0.3 dB ( $\leq 250 kHz / 150 \Omega$ )<br>typ. 0.3 dB ( $\leq 370 kHz / 100 \Omega$ )                                    |
| Cut-off frequency $f_g$ (3 dB), sym. in 100 $\Omega$ system     | typ. 1310 kHz   |
| Cut-off frequency $f_g$ (3 dB), sym. in 150 $\Omega$ system     | typ. 940 kHz  |
| Capacity (Core-Core)  | typ. 2.2 nF   |
| Resistance per path   | 1.65 $\Omega \pm 20 \%$   |
| Surge protection fault message                                  | none  |
| Max. required back-up fuse                                      | 630 mA (FF)   |
| Impulse durability (line-line)                                  | C1 - 1 kV / 500 A<br>C2 - 10 kV / 5 kA<br>C3 - 100 A  |
| Impulse durability (line-earth)                                 | C1 - 1 kV / 500 A<br>C2 - 10 kV / 5 kA  |

# TTC-6-1X2-24DC-PT - Surge protection device



2906804

<https://www.phoenixcontact.com/us/products/2906804>

|                               |            |
|-------------------------------|------------|
|                               | C3 - 100 A |
|                               | D1 - 500 A |
| Pulse reset time (line-line)  | ≤ 700 ms   |
| Pulse reset time (line-earth) | ≤ 1500 ms  |

## Additional technical data

|  |            |
|--|------------|
| Max. total discharge current $I_{\text{total max}} (8/20) \mu\text{s}$ | 20 kA (1x) |
|--|------------|

## Environmental and real-life conditions

### Ambient conditions

|   |                  |
|---|------------------|
| Degree of protection                    | IP20             |
| Ambient temperature (operation)         | -40 °C ... 85 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Altitude                                | ≤ 4000 m (amsl)  |
| Permissible humidity (operation)        | 5 % ... 95 %     |

## Standards and regulations

|                          |   |
|--------------------------|---|
| Standards/specifications | IEC 61643-21  |
| Note                     | 2000 + corrigendum 2001 + A1:2008, modified + A2:2012 |

### EN 61643-21

|                          |                          |
|--------------------------|--------------------------|
| Standards/specifications | EN 61643-21              |
| Note                     | 2001 + A1:2009 + A2:2013 |

## Mounting

|               |                          |
|---------------|--------------------------|
| Mounting type | DIN rail: TH 35 - 7.5 mm |
|---------------|--------------------------|

# TTC-6-1X2-24DC-PT - Surge protection device




2906804

<https://www.phoenixcontact.com/us/products/2906804>

## Drawings

Dimensional drawing

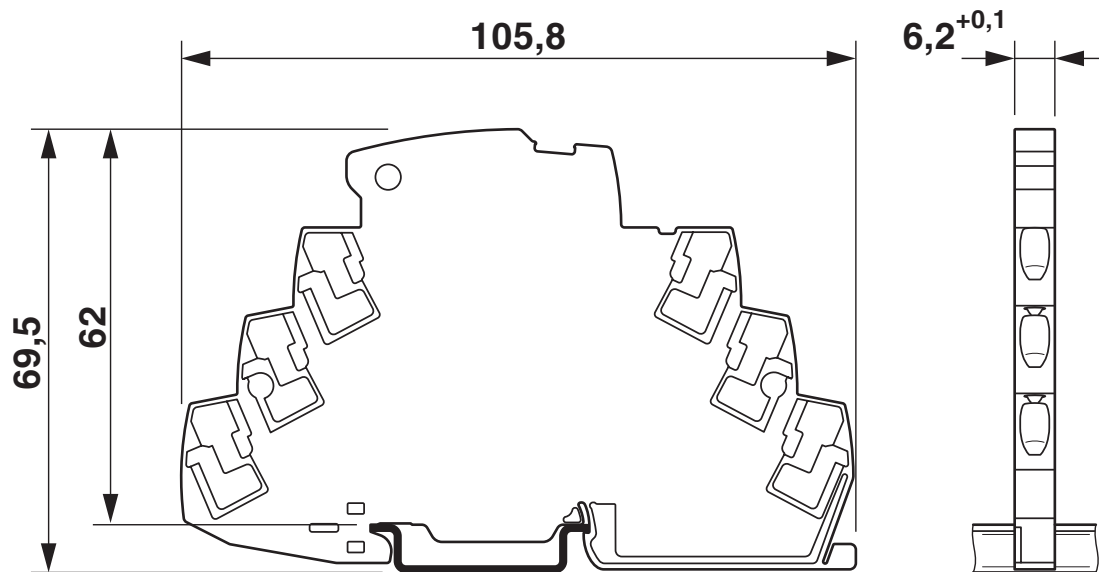

Schematic diagram

| TTC-6-1X2-...  |                                   |                                       |                          |       |                                   |  |      |                          |       |
|--|-----------------------------------|---------------------------------------|--------------------------|-------|-----------------------------------|--|------|--------------------------|-------|
| Category   | 1oo1 architecture, HFT=0          |                                       |                          |       | 1oo2 architecture, HFT=1          |  |      |                          |       |
|  | PFD <sub>AVG</sub>                | PFH                                   | Used budget of SIL 2 SIF |       | PFD <sub>AVG</sub>                | PFH                                    | CCF  | Used budget of SIL 3 SIF |       |
|  |                                   |                                       | PFD <sub>AVG</sub>       | PFH   |                                   |  |      | PFD <sub>AVG</sub>       | PFH   |
|  | 3.04 <sub>x10</sub> <sup>-5</sup> | 5.40 <sub>x10</sub> <sup>-9</sup> 1/h | 0.3 %                    | 0.5 % | 1.52 <sub>x10</sub> <sup>-6</sup> | 2.70 <sub>x10</sub> <sup>-10</sup> 1/h | 5 %  | 0.2 %                    | 0.3 % |
|  |                                   |                                       |                          |       | 3.04 <sub>x10</sub> <sup>-6</sup> | 5.40 <sub>x10</sub> <sup>-10</sup> 1/h | 10 % | 0.3 %                    | 0.5 % |
| Calculation based on exida report, Phoenix Contact 16/06-072 R023 V3R1<br>exida Profile 1, FMEDA Analysis 2, T <sub>proof</sub> : 1 year, MT: 10 years, MTTR: 24 hours, PTC: 99%<br>Used standards<br>IEC/EN 61508, edition 2010 (device specific)<br>IEC/EN 61511, edition 2016 + COR1:2016 + A1:2017 (system specific) |                                   |                                       |                          |       |                                   |  |      |                          |       |


## Functional safety scenarios

# TTC-6-1X2-24DC-PT - Surge protection device


2906804

<https://www.phoenixcontact.com/us/products/2906804>

Diagram

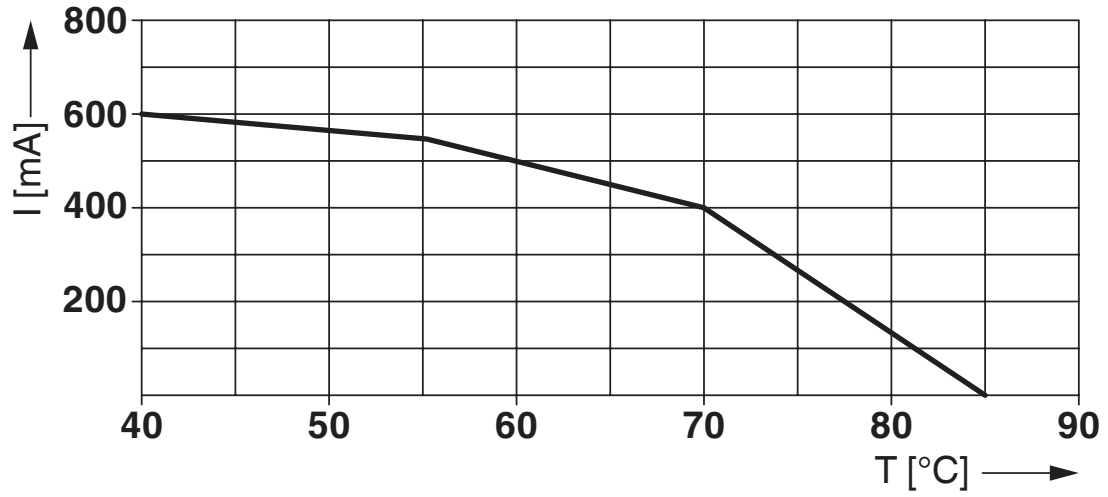

Circuit diagram

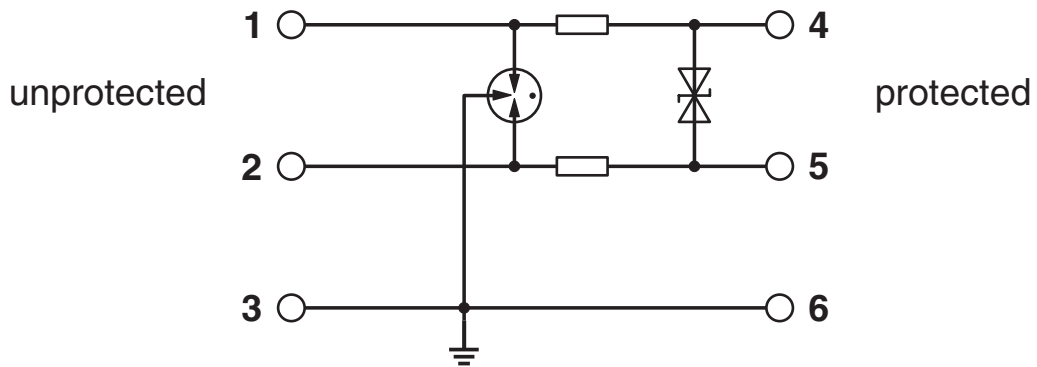

# TTC-6-1X2-24DC-PT - Surge protection device



2906804

<https://www.phoenixcontact.com/us/products/2906804>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2906804>

 **CSA**  
Approval ID: 70136717

 **DNV GL**  
Approval ID: TAE000027G

 **UL Listed**  
Approval ID: FILE E 138168

 **CSAus**  
Approval ID: 70136717

**UAE-RoHS**  
Approval ID: 22-06-16191

**Functional Safety**  
Approval ID: 16-06-072 R023 V3R1

# TTC-6-1X2-24DC-PT - Surge protection device



2906804

<https://www.phoenixcontact.com/us/products/2906804>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27171501 |
| ECLASS-15.0 | 27171501 |

### ETIM

|           |          |
|-----------|----------|
| ETIM 10.0 | EC001466 |
|-----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121600 |
|-------------|----------|

# TTC-6-1X2-24DC-PT - Surge protection device



2906804

<https://www.phoenixcontact.com/us/products/2906804>

## Environmental product compliance

### EU RoHS

|   |              |
|---|--------------|
| Fulfills EU RoHS substance requirements | Yes          |
| Exemption                               | 7(a), 7(c)-I |

### China RoHS

|  |   |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50   |
|  | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
|                                     | Lead(CAS: 7439-92-1)                 |
| SCIP                                | f82f03e7-cb1e-46c4-853e-43ab479783b3 |

### EF3.1 Climate Change

|         |               |
|---------|---------------|
| CO2e kg | 1.029 kg CO2e |
|---------|---------------|

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)