

TTC-6-GDT-C-110AC-UT-I - Surge protection device



2906844

<https://www.phoenixcontact.com/us/products/2906844>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Coarse surge protection with integrated status indicator for a signal wire with grounded reference potential. Can be used in safety-related circuits up to SIL 3.

Your advantages

- Space-saving and cost-saving with a narrow overall width of just 6 mm
- Continuous monitoring of protective devices, plus mechanical status indicator with optional remote signaling
- Finding the right product for all possible requirements in MCR applications is easy, thanks to the complete range of products with customized features

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2906844 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | CL23 |
| Product key | CL2264 |
| GTIN | 4055626136998 |
| Weight per piece (including packing) | 27.8 g |
| Weight per piece (excluding packing) | 23.13 g |
| Customs tariff number | 85363010 |
| Country of origin | DE |

TTC-6-GDT-C-110AC-UT-I - Surge protection device



2906844

<https://www.phoenixcontact.com/us/products/2906844>

Technical data

Product properties

| | |
|--------------------------------|-------------------------------------|
| Product type | Surge protection for MCR technology |
| Product family | TERMITRAB complete |
| IEC test classification | C1 |
| | C2 |
| | C3 |
| | D1 |
| Type | DIN rail module, one-piece |
| Surge protection fault message | optical |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Pollution degree | 2 |

Electrical properties

| | |
|-----------------------|----------|
| Nominal voltage U_N | 110 V AC |
|-----------------------|----------|

Connection data

| | |
|----------------------------------|---|
| Connection method | Screw connection |
| Screw thread | M3 |
| Tightening torque | 0.5 Nm ... 0.6 Nm |
| Conductor cross-section flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross-section rigid | 0.2 mm ² ... 4 mm ² |
| Conductor cross-section AWG | 24 ... 12 |

Dimensions

| | |
|---------------------|---------------------------------|
| Dimensional drawing | |
| Width | 6.2 mm |
| Height | 92 mm |
| Depth | 69.5 mm (incl. DIN rail 7.5 mm) |

Material specifications

| | |
|--|-----------------|
| Color | gray (RAL 7042) |
| Flammability rating according to UL 94 | V-0 |
| Insulating material | PBT |
| Housing material | PBT |

Mechanical properties

TTC-6-GDT-C-110AC-UT-I - Surge protection device



2906844

<https://www.phoenixcontact.com/us/products/2906844>

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

Protective circuit

| | |
|---|---|
| Direction of action | Line-Earth Ground |
| Nominal voltage U_N | 110 V AC |
| Maximum continuous operating voltage U_C | 130 V AC |
| Rated current | 2 A (60 °C) |
| Operating effective current I_C at U_C | $\leq 1 \mu A$ |
| Protective conductor current I_{PE} | $\leq 1 \mu A$ |
| Nominal discharge current I_n (8/20) μs (line-ground) | 5 kA |
| Pulse discharge current I_{imp} (10/350) μs (line-earth) | 0.5 kA |
| Voltage protection level U_p (line-earth) | ≤ 800 V (C1 - 2 kV) ≤ 1 kV (C2 - 10 kV) ≤ 800 V (C3 - 25 A) ≤ 900 V (C3 - 100 A) |
| Response time t_A (line-earth) | ≤ 100 ns |
| Input attenuation aE, asym. | typ. 0.3 dB (≤ 8 MHz/150 Ω) typ. 0.3 dB (≤ 30 MHz/50 Ω) |
| Cut-off frequency f_g (3 dB), asym. (PE) in 50 Ω system | typ. 130 MHz |
| Cut-off frequency f_g (3 dB), asym. (PE) in 150 Ω system | typ. 25 MHz |
| Capacity (Core-Earth) | 5 pF |
| Resistance per path | ≤ 100 m Ω |
| Surge protection fault message | optical |
| Impulse durability (line-earth) | C1 - 1 kA C2 - 5 kA C3 - 100 A D1 - 500 A |
| Pulse reset time (line-earth) | ≤ 1 ms |

Environmental and real-life conditions

Ambient conditions

| | |
|---|-----------------------|
| Degree of protection | IP20 (with end cover) |
| Ambient temperature (operation) | -40 °C ... 85 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Altitude | ≤ 2000 m (amsl) |
| Permissible humidity (operation) | 5 % ... 95 % |

Standards and regulations

| | |
|--------------------------|---|
| Standards/specifications | IEC 61643-21 |
| Note | 2000 + corrigendum 2001 + A1:2008, modified + A2:2012 |

EN 61643-21

| | |
|--------------------------|-------------|
| Standards/specifications | EN 61643-21 |
|--------------------------|-------------|

TTC-6-GDT-C-110AC-UT-I - Surge protection device



2906844

<https://www.phoenixcontact.com/us/products/2906844>

Note

2001 + A1:2009 + A2:2013

Mounting

Mounting type

DIN rail: 35 mm

TTC-6-GDT-C-110AC-UT-I - Surge protection device




2906844

<https://www.phoenixcontact.com/us/products/2906844>

Drawings

Dimensional drawing

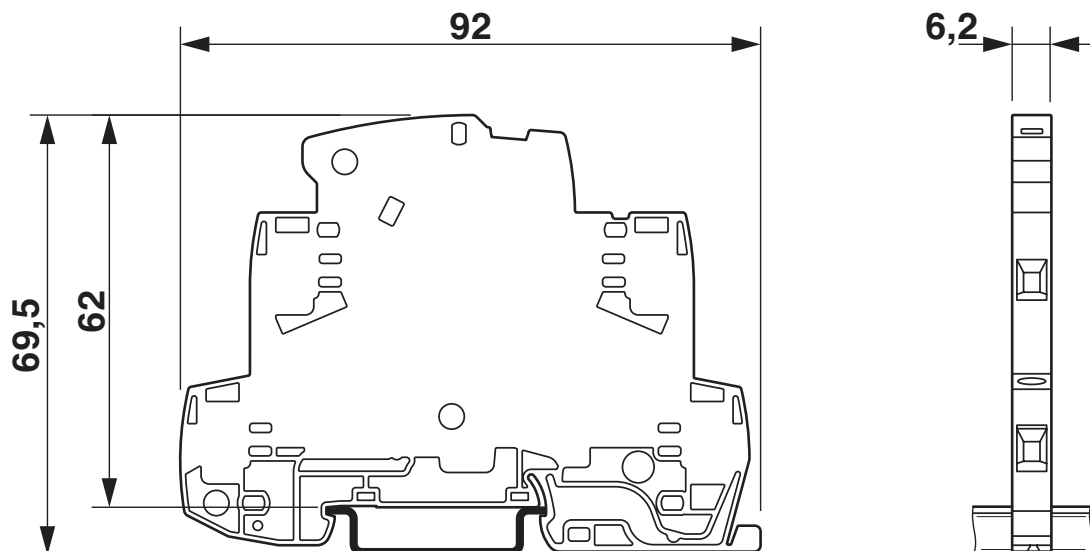

Schematic diagram

| TTC-6-TVSD | | | | | | | | | |
|--|--------------------------|----------------------------|--------------------------|-------|--------------------------|----------------------------|------|--------------------------|-------|
| Category | 1oo1 architecture, HFT=0 | | | | 1oo2 architecture, HFT=1 | | | | |
| | PFD _{AVG} | PFH | Used budget of SIL 2 SIF | | PFD _{AVG} | PFH | CCF | Used budget of SIL 3 SIF | |
| | | | PFD _{AVG} | PFH | | | | PFD _{AVG} | PFH |
| | 5.62x10 ⁻⁷ | 1.00x10 ⁻¹⁰ 1/h | 0.0 % | 0.0 % | 2.81x10 ⁻⁸ | 5.00x10 ⁻¹² 1/h | 5 % | 0.0 % | 0.0 % |
| | | | | | 5.62x10 ⁻⁸ | 1.00x10 ⁻¹¹ 1/h | 10 % | 0.0 % | 0.0 % |
| Calculation based on exida report, Phoenix Contact 16/06-072 R024 V2R0 exida Profile 1, FMEDA Analysis 2, T _{proof} : 1 year, MT: 10 years, MTTR: 24 hours, PTC: 99% Used standards IEC/EN 61508, edition 2010 (device specific) IEC/EN 61511, edition 2016 + COR1:2016 + A1:2017 (system specific) | | | | | | | | | |

Functional safety scenarios

Table also applies to the TTC-6-GDT item group

Diagram




TTC-6-GDT-C-110AC-UT-I - Surge protection device

2906844

<https://www.phoenixcontact.com/us/products/2906844>



Circuit diagram

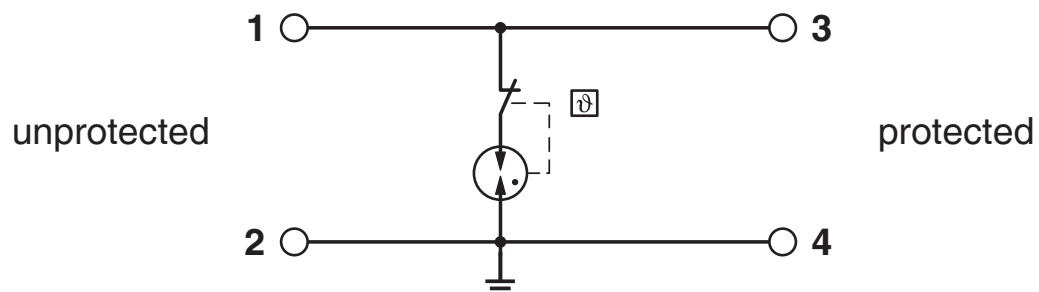

2906844

<https://www.phoenixcontact.com/us/products/2906844>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2906844>



CSA

Approval ID: 70136717



DNV GL

Approval ID: TAE000027G



UL Listed

Approval ID: FILE E 138168



CSAus

Approval ID: 70136717

UAE-RoHS

Approval ID: 22-06-16192

Functional Safety

Approval ID: 16-06-072 R024 V2R0

TTC-6-GDT-C-110AC-UT-I - Surge protection device



2906844

<https://www.phoenixcontact.com/us/products/2906844>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27171501 |
| ECLASS-15.0 | 27171501 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC001466 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121600 |
|-------------|----------|

TTC-6-GDT-C-110AC-UT-I - Surge protection device



2906844

<https://www.phoenixcontact.com/us/products/2906844>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

EF3.1 Climate Change

| | |
|---------|----------------|
| CO2e kg | 41.659 kg CO2e |
|---------|----------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com