

PT 2X1-BE/FM - Surge protection base-element




2920036

<https://www.phoenixcontact.com/us/products/2920036>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Base element to accept a protective plug with diagnostic and status indicator for two signal wires with common reference potential.



Your advantages

- Maximum ease of maintenance, thanks to the 2-piece design
- Easy selection for all possible demands in MCR applications with a complete product portfolio
- The signal is not influenced during maintenance work, thanks to the impedance-neutral insertion and removal of protective plugs
- Easy integration into the control room via floating remote indication contact

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2920036 |
| Packing unit | 10 pc |
| Minimum order quantity | 10 pc |
| Sales key | CL21 |
| Product key | CL2112 |
| GTIN | 4046356154093 |
| Weight per piece (including packing) | 55 g |
| Weight per piece (excluding packing) | 49.399 g |
| Customs tariff number | 85366990 |
| Country of origin | DE |

PT 2X1-BE/FM - Surge protection base-element

2920036

<https://www.phoenixcontact.com/us/products/2920036>

Technical data

Notes

| | |
|--------------------|---|
| Notes on operation | When the PT ...-BE/FM base elements are used, the connections 9/10 (GND) are directly connected to the DIN rail via the metal mounting foot. |
|--------------------|---|

Product properties

| | |
|---------------------|---------------------------------|
| Product type | Base element |
| Product family | PLUGTRAB PT |
| Type | Base element, DIN rail mounting |
| Number of positions | 2 |

Electrical properties


Indicator/remote signaling

| | |
|---|------------------|
| Maximum operating voltage $U_{max. AC}$ | 250 V AC |
| Max. operating current I_{max} | 0.2 A (250 V AC) |
| | 0.2 A (220 V DC) |
| | 1 A (60 V AC) |
| | 1 A (60 V DC) |

Connection data

| | |
|----------------------------------|---|
| Connection method | Screw connection |
| Screw thread | M3 |
| Tightening torque | 0.8 Nm |
| Conductor cross-section flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross-section rigid | 0.2 mm ² ... 4 mm ² |
| Conductor cross-section AWG | 24 ... 12 |

Dimensions
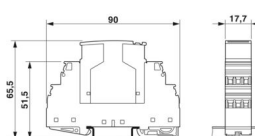
| | |
|------------------------|--|
| Dimensional drawing |  |
| Width | 17.5 mm |
| Height | 90 mm |
| Depth | 51.7 mm |
| Horizontal pitch | 1 Div. |
| Complete module width | 17.7 mm |
| Complete module height | 90 mm |
| Complete module depth | 65.5 mm |

PT 2X1-BE/FM - Surge protection base-element



2920036

<https://www.phoenixcontact.com/us/products/2920036>

Material specifications

| | |
|--|------------------|
| Color | black (RAL 9005) |
| Flammability rating according to UL 94 | V-0 |

Mechanical properties

Mechanical data

| | |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

Protective circuit

| | |
|---------------------|---------------------|
| Direction of action | Shield-Earth Ground |
|---------------------|---------------------|

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|-----------------|
| Degree of protection | IP20 |
| Ambient temperature (operation) | 40 °C ... 85 °C |

Mounting

| | |
|---------------|-----------------|
| Mounting type | DIN rail: 35 mm |
|---------------|-----------------|

PT 2X1-BE/FM - Surge protection base-element


2920036

<https://www.phoenixcontact.com/us/products/2920036>



Drawings

Dimensional drawing

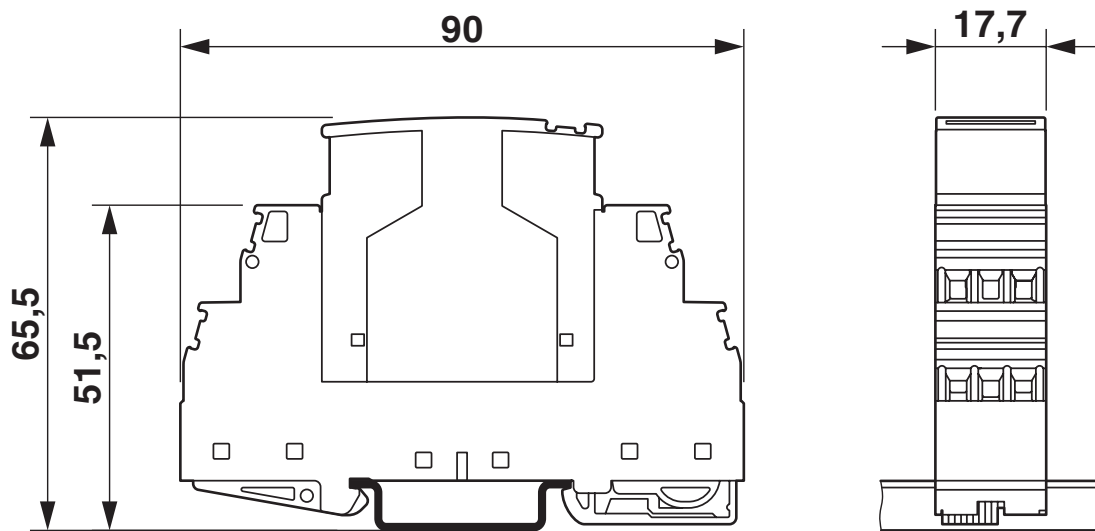

The figure shows the complete module consisting of a base element and connector

PT 2X1-BE/FM - Surge protection base-element



2920036

<https://www.phoenixcontact.com/us/products/2920036>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2920036>



DNV GL

Approval ID: TAE00001N6



UL Listed

Approval ID: FILE E 138168

PT 2X1-BE/FM - Surge protection base-element



2920036

<https://www.phoenixcontact.com/us/products/2920036>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27171501 |
| ECLASS-15.0 | 27171501 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC001466 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121600 |
|-------------|----------|

PT 2X1-BE/FM - Surge protection base-element



2920036

<https://www.phoenixcontact.com/us/products/2920036>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com