

REL-SR- 24DC/2X21 - Safety relays



2961574

<https://www.phoenixcontact.com/us/products/2961574>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safety relay with force-guided contacts in accordance with EN 50205, contact switching type 2 changeover contacts, connection suitable for PCB mounting. The requirements for type A in accordance with EN 50205 are satisfied if the circuit is designed as 1 N/O contact / 1 N/C contact.

Your advantages

- Like all PSR safety relays, equipped with force-guided contacts in accordance with EN 50205
- 1-channel control

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 2961574 |
| Packing unit | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | DN01 |
| Product key | DNA162 |
| GTIN | 4017918996796 |
| Weight per piece (including packing) | 23.26 g |
| Weight per piece (excluding packing) | 16.995 g |
| Customs tariff number | 85364190 |
| Country of origin | CZ |

Technical data

Product properties

| | |
|-------------------------|--|
| Product type | Single relay |
| Mechanical service life | approx. 10 ⁷ cycles |
| Relay type | Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3 |

Insulation characteristics: Air clearances and creepage distances between the power circuits

| | |
|----------------------|---------------------------------------|
| Insulation | Safe isolation, reinforced insulation |
| Overvoltage category | III |
| Degree of pollution | 2 |

Data management status

| | |
|------------------------------|------------|
| Date of last data management | 01.04.2026 |
|------------------------------|------------|

Electrical properties

Air clearances and creepage distances between the power circuits

| | |
|--------------------------|----------|
| Rated insulation voltage | 250 V AC |
| Rated surge voltage | 6 kV |

Environmental and real-life conditions

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -25 °C ... 70 °C |
| Ambient temperature (storage/transport) | -25 °C ... 70 °C |

Standards and regulations

Air clearances and creepage distances between the power circuits

| | |
|-----------------------|--------------|
| Standards/regulations | DIN EN 50178 |
| | IEC 60664-1 |

REL-SR- 24DC/2X21 - Safety relays




2961574

<https://www.phoenixcontact.com/us/products/2961574>

Drawings

Block diagram

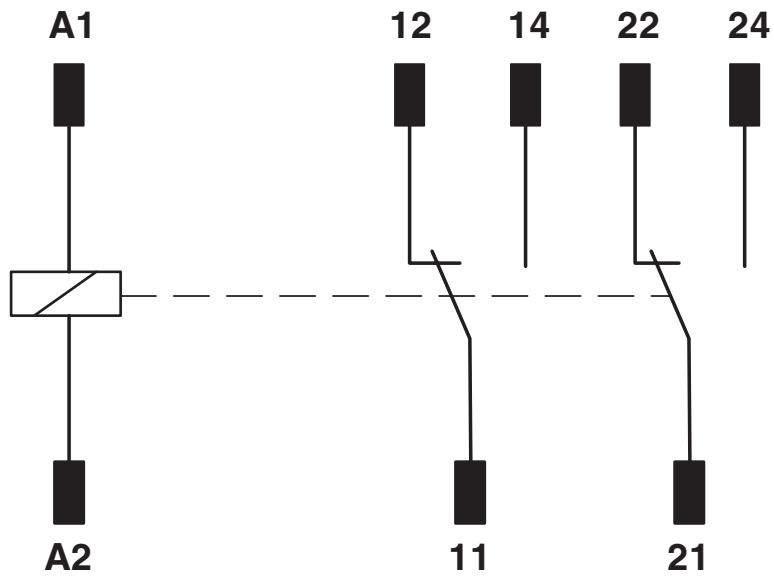

REL-SR- 24DC/2X21 - Safety relays



2961574

<https://www.phoenixcontact.com/us/products/2961574>

Classifications

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39122300 |
|-------------|----------|

REL-SR- 24DC/2X21 - Safety relays



2961574

<https://www.phoenixcontact.com/us/products/2961574>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com