

# EMG 25-REL/KSR-230/2X21AU/SO46 - Relay module



2964843

<https://www.phoenixcontact.com/us/products/2964843>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug-in relay interfaces for protection against interference on the control side, with soldered-in miniature switching relay, contacts (Au): small loads, 2 changeover contacts, input voltage 230 V AC

## Commercial data

Item number	2964843
Packing unit	10 pc
Minimum order quantity	1 pc
Sales key	C460
Product key	DK61C2
GTIN	4017918156947
Weight per piece (including packing)	84 g
Weight per piece (excluding packing)	72.83 g
Customs tariff number	85364900
Country of origin	DE

## Technical data

### Notes

#### Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

### Product properties

Product type	Relay Module
Product family	EMG
Application	Filter to prevent interference
Mechanical service life	approx. $2 \times 10^7$ cycles

#### Insulation characteristics

Overvoltage category	III
Pollution degree	2

#### Data management status

Date of last data management	01.04.2026
------------------------------	------------

### Electrical properties

Maximum power dissipation for nominal condition	4.14 W
Test voltage (Winding/contact)	2.5 kV AC (50 Hz, 1 min., winding/contact)

### Input data

#### Coil side

Nominal input voltage $U_N$	230 V AC/DC
Input voltage range	207 V AC/DC ... 253 V AC/DC (20 °C)
Drive and function	monostable
Drive (polarity)	polarized
Typical input current at $U_N$	18 mA
Typical response time	10 ms
Typical release time	8 ms
Protective circuit	Bridge rectifier; Bridge rectifier
	Surge protection; Varistor
	RC element; RC element
Operating voltage display	Yellow LED

### Output data

#### Switching

Contact switching type	2 changeover contacts
Type of switch contact	Single contact
Contact material	Ag, gold-flashed

# EMG 25-REL/KSR-230/2X21AU/SO46 - Relay module



2964843

<https://www.phoenixcontact.com/us/products/2964843>

Maximum switching voltage	24 V AC/DC
Limiting continuous current	0.5 A
Maximum inrush current	0.2 A
Interrupting rating (ohmic load) max.	5 W

Switching: when the gold layer is destroyed

Note	the following values are applicable if a gold layer is destroyed
Maximum switching voltage	250 V AC/DC
Limiting continuous current	5 A

## Connection data

Coil side

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross-section rigid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross-section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section AWG	24 ... 12

Contact side

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross-section rigid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross-section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section AWG	24 ... 12

## Dimensions

Item dimensions

Width	25 mm
Height	75 mm
Depth	62.5 mm

## Material specifications

Color	green (RAL 6021)
-------	------------------

## Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-20 °C ... 40 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

## Standards and regulations

	IEC 60664
--	-----------

# EMG 25-REL/KSR-230/2X21AU/SO46 - Relay module



2964843

<https://www.phoenixcontact.com/us/products/2964843>


Standards/regulations	IEC 60664A
	DIN VDE 0110
	DIN VDE 0109-11, draft
	IEC 60255/DIN VDE 0435 (in relevant parts)

## Mounting

Mounting type	DIN rail mounting
Mounting position	any

Drawings

Circuit diagram

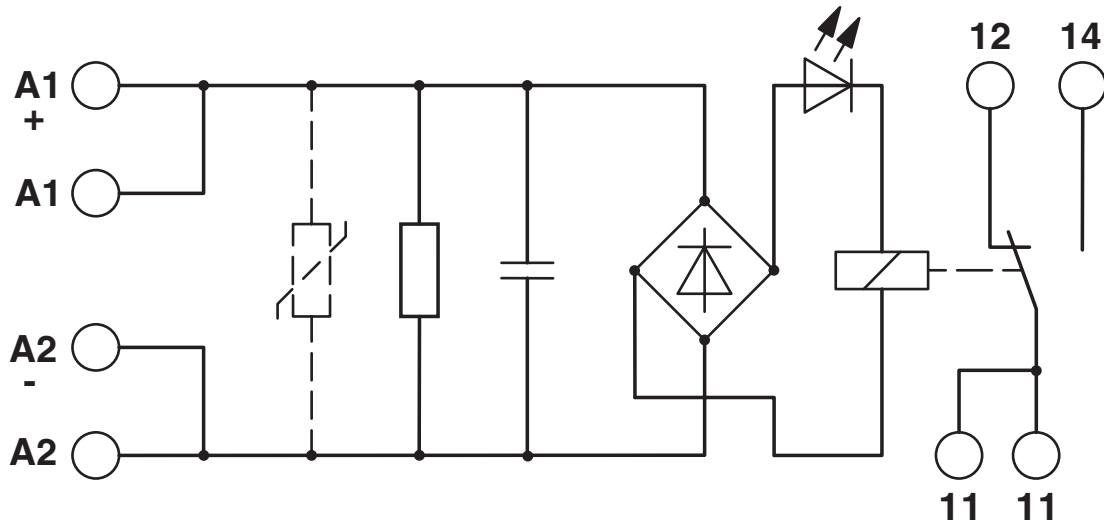

# EMG 25-REL/KSR-230/2X21AU/SO46 - Relay module



2964843

<https://www.phoenixcontact.com/us/products/2964843>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2964843>



**EAC**

Approval ID: RU\*C-DE.\*08.B.00010

2964843

<https://www.phoenixcontact.com/us/products/2964843>

## Classifications

### ECLASS

ECLASS-13.0	27371601
ECLASS-15.0	27371601

### ETIM

ETIM 10.0	EC001437
-----------	----------

### UNSPSC

UNSPSC 21.0	39122300
-------------	----------

2964843

<https://www.phoenixcontact.com/us/products/2964843>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Hexahydromethylphthalic anhydride(CAS: n/a)
	Lead(CAS: 7439-92-1)
SCIP	7871797d-3910-4bd6-ae6a-658bc1417f9c

### EF3.1 Climate Change

CO2e kg	2.328 kg CO2e
---------	---------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
 586 Fulling Mill Road  
 Middletown, PA 17057, United States  
 (+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)