


# OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug-in miniature solid-state relay, input solid-state relay, 1 N/O contact, input: 60 V DC, output: 3 - 48 V DC/100 mA

## Your advantages

- Vibration and shock resistant
- RT III-proof (wash-proof)
- Wear-free and durable
- Can be soldered on PCB
- Zero voltage switch at AC output
- Switching power of up to 24 V DC/5 A

## Commercial data

Item number	2966621
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	C460
Product key	DK69K1
GTIN	4017918130473
Weight per piece (including packing)	5.22 g
Weight per piece (excluding packing)	5.22 g
Customs tariff number	85364110
Country of origin	HU

# OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

## Technical data

### Product properties

Product type	Single solid-state relay
Operating mode	100% operating factor

### Insulation characteristics: Standards/regulations

Insulation	Basic insulation
Overvoltage category	III
Pollution degree	2

### Data management status

Date of last data management	01.04.2026
------------------------------	------------

### Electrical properties

Maximum power dissipation for nominal condition	0.18 W
Test voltage (Input/output)	2.5 kV (50 Hz, 1 min., input/output)

### Input data

Nominal input voltage $U_N$	60 V DC
Input voltage range in reference to $U_N$	0.9 ... 1.1
Input voltage range	54 V DC ... 66 V DC
Switching threshold "0" signal in reference to $U_N$	0.4
Switching threshold "1" signal in reference to $U_N$	0.9
Typical input current at $U_N$	3 mA
Typical response time	50 $\mu$ s (at $U_N$ )
Typical turn-off time	800 $\mu$ s (at $U_N$ )
Transmission frequency	100 Hz

### Output data

Contact switching type	1 N/O contact
Design of digital output	electronic
Output voltage range	3 V DC ... 48 V DC
Limiting continuous current	100 mA
Voltage drop at max. limiting continuous current	$\leq 1$ V
Output circuit	2-conductor, floating
Protective circuit	Reverse polarity protection; Polarity protection diode Surge protection

### Dimensions

#### Item dimensions

Width	5 mm
Height	28 mm
Depth	15 mm

# OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

## Material specifications

Color	black (RAL 9005)
-------	------------------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	RT III
Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C

## Approvals

### Corrosive gas test

Identification	ISA-S71.04. G3 Harsh Group
	EN 60068-2-60

## Standards and regulations

### Standards/regulations


Standards/regulations	IEC 60664
	EN 50178

## Mounting


Assembly note	in rows with zero spacing
Mounting position	any

Drawings

Circuit diagram

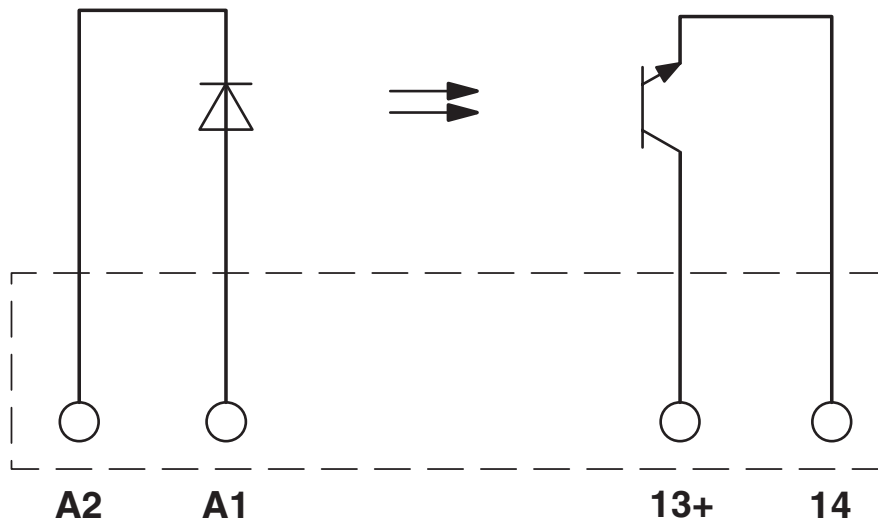

Drilling plan/solder pad geometry

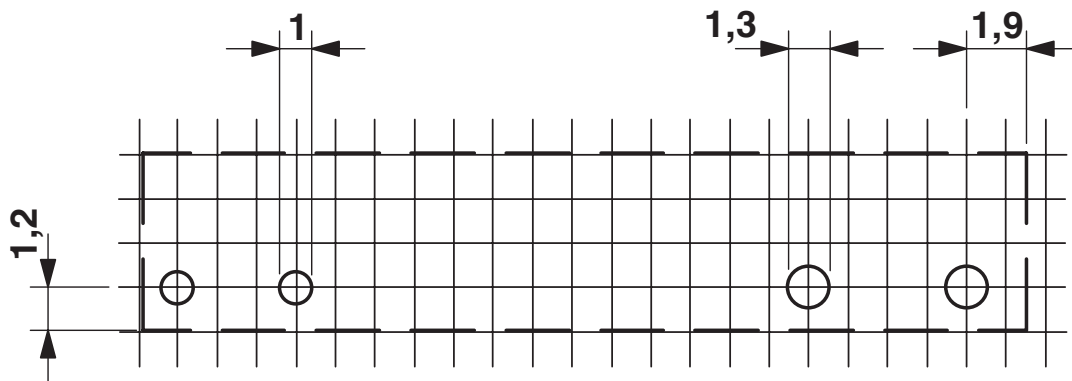

a = pitch division 1.25 mm and 1.27 mm

# OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2966621>



**cUL Recognized**  
Approval ID: FILE E 195083



**UL Recognized**  
Approval ID: FILE E 195083



**EAC**  
Approval ID: RU\*C-DE.\*08.B.00010



**UL Recognized**  
Approval ID: FILE E 195083



**cUL Recognized**  
Approval ID: FILE E 195083



**GL**  
Approval ID: 46016-03 HH

# OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

## Classifications

### ECLASS

ECLASS-13.0	27371604
ECLASS-15.0	27371604

### ETIM

ETIM 10.0	EC001504
-----------	----------

### UNSPSC

UNSPSC 21.0	39122300
-------------	----------

# OPT-60DC/ 48DC/100 - Miniature solid-state relay



2966621

<https://www.phoenixcontact.com/us/products/2966621>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
-----------------------------------------	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

### EF3.1 Climate Change

CO2e kg	0.315 kg CO2e
---------	---------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)