

PSR-SPP- 24UC/URM/3X1/3X2 - Coupling relay



2981842

<https://www.phoenixcontact.com/us/products/2981842>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safe coupling relay with force-guided contacts, 3 N/O contacts, 3 N/C contacts, width: 22.5 mm, pluggable Push-in terminal block

The figure shows a version with a screw connection

Your advantages

- Up to Cat. 1/PL c in accordance with EN ISO 13849-1, SIL 1 in accordance with IEC 61508
- Safe readback due to force-guided signal contact in accordance with EN 50205
- Easy proof test according to IEC 61508 thanks to integrated signal contact
- 1 or 2-channel control
- 3 enabling current paths, 3 confirmation current paths

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2981842 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | DN01 |
| Product key | DNA162 |
| GTIN | 4046356138611 |
| Weight per piece (including packing) | 160 g |
| Weight per piece (excluding packing) | 153 g |
| Customs tariff number | 85364900 |
| Country of origin | DE |

Technical data

Product properties

| | |
|-------------------------|--|
| Product type | Coupling relay |
| Product family | PSRclassic |
| Application | Safe switch off |
| | High demand |
| | Low demand |
| Control | 1 and 2 channel |
| Mechanical service life | 10x 10 ⁶ cycles |
| Relay type | Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 2 |

Times

| | |
|--|---|
| Typ. starting time with U _s | typ. 15 ms (with U _s when controlled via A1) |
| Typical release time | typ. 15 ms (with U _s when controlled via A1) |
| Restart time | < 1 s (Boot time) |
| Recovery time | < 500 ms |

Electrical properties

| | |
|---|--|
| Maximum power dissipation for nominal condition | 6.11 W (at U _B = 26.4 V DC, U _S = 24 V, I _S = 45 mA, n = 1, I _L ² = 48 A ² , R _{contact} = 0.1 Ω _{max}) |
| Nominal operating mode | 100% operating factor |
| Rated insulation voltage | 250 V |
| Rated surge voltage/insulation | 4 kV / Basic isolation, (safe isolation, reinforced insulation and 6 kV between input circuit and enabling current paths.) |

Supply

| | |
|---|-----------------------------------|
| Designation | A1/A2 |
| Rated control circuit supply voltage U _S | 24 V AC/DC -15 % / +10 % |
| Rated control supply current I _S | typ. 45 mA |
| Power consumption at U _S | typ. 1.08 W |
| Filter time | 1 ms (at A1-A2; test pulse width) |
| | 1 s (at A1-A2; test pulse rate) |
| Protective circuit | Surge protection |
| | Suppressor diode |

Output data

Relay: Enabling current paths (13/14, 23/24, 33/34)

| | |
|------------------------|--------------------------|
| Number of outputs | 3 |
| Contact switching type | 3 enabling current paths |

PSR-SPP- 24UC/URM/3X1/3X2 - Coupling relay



2981842

<https://www.phoenixcontact.com/us/products/2981842>

| | |
|--|---|
| Contact material | AgSnO ₂ |
| Switching voltage | min. 5 V AC/DC |
| | max. 250 V AC/DC |
| Switching power | min. 50 mW |
| Inrush current | min. 10 mA |
| | max. 8 A |
| Switching capacity | 5 A (24 V (DC13)) |
| | 5 A (250 V (AC15)) |
| Limiting continuous current | 6 A |
| Sq. Total current | 48 A ² |
| Switching frequency | max. 0.5 Hz |
| Mechanical service life | 10x 10 ⁶ cycles |
| Interrupting rating (ohmic load) max. | see load limit curve |
| Maximum interrupting rating (inductive load) | 48 W (N/O contact, 24 V DC, τ = 40 ms) |
| | 40 W (N/O contact, 48 V DC, τ = 40 ms) |
| | 36 W (N/O contact, 60 V DC, τ = 40 ms) |
| | 35 W (N/O contact, 110 V DC, τ = 40 ms) |
| | 33 W (N/O contact, 220 V DC, τ = 40 ms) |
| Output fuse | 10 A gL/gG NEOZED |
| | 4 A gL/gG NEOZED (Low demand) |

Relay: Confirmation current paths (41/42, 51/52, 61/62)

| | |
|-----------------------------|----------------------------|
| Number of outputs | 3 |
| Contact switching type | 3 signaling current paths |
| Contact material | AgSnO ₂ |
| Switching voltage | min. 5 V AC/DC |
| | max. 250 V AC/DC |
| Switching power | min. 50 mW |
| Inrush current | min. 10 mA |
| | max. 8 A |
| Switching capacity | 5 A (DC13, 24 V) |
| | 5 A (AC15, 250 V) |
| Limiting continuous current | 6 A |
| Sq. Total current | 48 A ² |
| Mechanical service life | 10x 10 ⁶ cycles |
| Output fuse | 6 A gL/gG NEOZED |

Connection data

Connection technology

| | |
|-----------|-----|
| pluggable | yes |
|-----------|-----|

Conductor connection

| | |
|-------------------------------|---|
| Connection method | Push-in connection |
| Conductor cross-section rigid | 0.2 mm ² ... 1.5 mm ² |

PSR-SPP- 24UC/URM/3X1/3X2 - Coupling relay



2981842

<https://www.phoenixcontact.com/us/products/2981842>

| | |
|---|--|
| Conductor cross-section flexible | 0.2 mm ² ... 1.5 mm ² |
| Conductor cross-section, flexible, with ferrule, with plastic sleeve | 0.25 mm ² ... 1.5 mm ² (only together with CRIMPFOX 6) |
| Conductor cross-section, flexible, with ferrule, without plastic sleeve | 0.25 mm ² ... 1.5 mm ² (only together with CRIMPFOX 6) |
| Conductor cross-section AWG | 24 ... 16 |
| Stripping length | 8 mm |

Signaling

| | |
|---------------------------|-----------------|
| Operating voltage display | 1 x LED (green) |
|---------------------------|-----------------|

Dimensions

| | |
|--------|----------|
| Width | 22.5 mm |
| Height | 114.5 mm |
| Depth | 112 mm |

Material specifications

| | |
|------------------|-------------------|
| Color (Housing) | yellow (RAL 1018) |
| Housing material | PA |

Characteristics

Safety data

| | |
|----------------------------|---|
| Stop category (EN 60204-1) | 0 |
|----------------------------|---|

Safety data: EN ISO 13849

| | |
|------------------------|---|
| Performance level (PL) | c |
|------------------------|---|

Safety data: IEC 61508 - High demand

| | |
|------------------------------|---|
| Safety Integrity Level (SIL) | 1 |
|------------------------------|---|

Safety data: IEC 61508 - Low demand

| | |
|------------------------------|---|
| Safety Integrity Level (SIL) | 1 |
|------------------------------|---|

Safety data

| | |
|------------------------------|---|
| Safety Integrity Level (SIL) | 1 |
|------------------------------|---|

Environmental and real-life conditions

Ambient conditions

| | |
|--|--|
| Degree of protection | IP20 |
| Min. degree of protection of inst. location | IP54 |
| Ambient temperature (operation) | -20 °C ... 55 °C |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C |
| Maximum altitude | max. 2000 m (Above sea level) |
| Max. permissible humidity (storage/transport) | 75 % (on average, 85% infrequently, non-condensing) |
| Max. permissible relative humidity (operation) | 75 % (on average, 85% infrequently, non-condensing) |
| Shock | 15g (In the event of stress caused by shock, contact reactions are possible for up to 1 ms.) |

PSR-SPP- 24UC/URM/3X1/3X2 - Coupling relay



2981842

<https://www.phoenixcontact.com/us/products/2981842>

| | |
|-----------------------|---|
| Vibration (operation) | 10 Hz ... 150 Hz, 2g (In the event of stress caused by vibration, contact reactions are possible for up to 1 ms.) |
|-----------------------|---|

Approvals

CE

| | |
|-------------|--------------|
| Certificate | CE-compliant |
|-------------|--------------|

Mounting

| | |
|-------------------|------------------------|
| Mounting type | DIN rail mounting |
| Mounting position | vertical or horizontal |

PSR-SPP- 24UC/URM/3X1/3X2 - Coupling relay



2981842

<https://www.phoenixcontact.com/us/products/2981842>


Drawings

Application drawing



Reliable signal exchange between two systems with confirmation function.

Block diagram

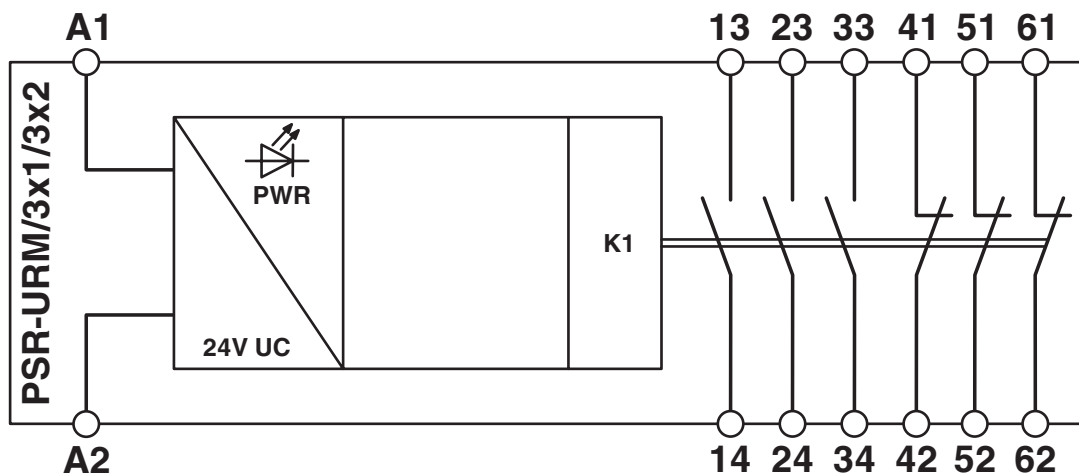


Block diagram

2981842


<https://www.phoenixcontact.com/us/products/2981842>


Approvals


 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2981842>


 **Functional Safety**
Approval ID: 3535 2399

 **Functional Safety**
Approval ID: 3535 2399

 **cULus Listed**
Approval ID: E140324

 **cULus Listed**
Approval ID: E140324

 **Functional Safety**
Approval ID: 4478015124312

 **Functional Safety**
Approval ID: 4478015124312

PSR-SPP- 24UC/URM/3X1/3X2 - Coupling relay



2981842

<https://www.phoenixcontact.com/us/products/2981842>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27371819 |
| ECLASS-15.0 | 27371819 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC001449 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39122200 |
|-------------|----------|

PSR-SPP- 24UC/URM/3X1/3X2 - Coupling relay



2981842

<https://www.phoenixcontact.com/us/products/2981842>

Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 7(a) |

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|---|
| REACH candidate substance (CAS No.) | Hexahydromethylphthalic anhydride(CAS: n/a) |
| | Lead(CAS: 7439-92-1) |
| SCIP | fea6b4af-8451-4859-8e52-22898f8b4115 |

EF3.1 Climate Change

| | |
|---------|---------------|
| CO2e kg | 2.178 kg CO2e |
|---------|---------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com