
UTME 6-SET POWER 1 - Starter kit

3036001

https://www.phoenixcontact.com/us/products/3036001

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

SCREW



Starter kit - consisting of test disconnect terminal blocks with screw connection technology, marking material, bridging and test accessories. A terminal strip for a three-phase transformer circuit (current and voltage) can be configured individually.

Commercial data

Item number	3036001
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BE01
Product key	BE1133
GTIN	4055626345451
Weight per piece (including packing)	674.8 g
Weight per piece (excluding packing)	674 g
Customs tariff number	85369010
Country of origin	DE

Set consists of

UTME 6 - Test disconnect terminal block

3047400

https://www.phoenixcontact.com/us/products/3047400



Test disconnect terminal block, nom. voltage: 500 V, nominal current: 30 A, 1 level, connection method: Screw connection, Rated cross section: 6 mm^2, cross section: 0.2 mm^2 - 10 mm^2, mounting: NS 35/7,5, NS 35/15, color: gray

UTMED 6 - Feed-through terminal block

3047413

https://www.phoenixcontact.com/us/products/3047413



Feed-through terminal block, nom. voltage: 500 V, nominal current: 41 A, number of connections: 2, connection method: Screw connection, Rated cross section: 6 mm^2, cross section: 0.2 mm^2 - 10 mm^2, mounting type: NS 35/7,5, NS 35/15, color: gray

UTMED 6-PE - Protective conductor terminal block

3047442

https://www.phoenixcontact.com/us/products/3047442



Protective conductor terminal block, number of connections: 2, connection method: Screw connection, cross section: 0.2 mm^2 - 10 mm^2, mounting type: NS 35/7,5, NS 35/15, color: green-yellow

D-UTME 6 - End cover

3047426

https://www.phoenixcontact.com/us/products/3047426

End cover, depth: 49.6 mm, width: 2.2 mm, height: 100.8 mm, color: gray



ATP-URTK/SP - Partition plate

0311139

https://www.phoenixcontact.com/us/products/0311139



Partition plate, depth: 64 mm, width: 2 mm, height: 99 mm, color: gray

CARRIER 35-8 - Partition plate

3034387

https://www.phoenixcontact.com/us/products/3034387



Partition plate, With storage option for FBS...-8 and PAI 4-FIX, material: PA, mounting type: NS 35/7,5, NS 35/15, color: gray

SB-ME 2-8 - Bridge bar

3034468

https://www.phoenixcontact.com/us/products/3034468



Bridge bar, pitch: 8.2 mm, number of positions: 2, nominal current: 30 A, length: 25 mm, color: gray/orange

FBS 2-8 - Plug-in bridge

3030284

https://www.phoenixcontact.com/us/products/3030284



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, nominal current: 41 A, color: red

PAI-4-FIX YE - Test adapter

3032745

https://www.phoenixcontact.com/us/products/3032745



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: yellow

PAI-4-FIX GN - Test adapter

3032758

https://www.phoenixcontact.com/us/products/3032758



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: green

PAI-4-FIX VT - Test adapter

3032761

https://www.phoenixcontact.com/us/products/3032761



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: violet

PAI-4-FIX BU - Test adapter

3032729

https://www.phoenixcontact.com/us/products/3032729



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: blue

S-ME 6 - Switching lock

3034439

https://www.phoenixcontact.com/us/products/3034439



Switching lock, width: 8.2 mm, height: 12 mm, color: white

CLIPFIX 35-5 - End bracket

3022276

https://www.phoenixcontact.com/us/products/3022276



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5. 15 mm, color: gray

KLM 3 - Terminal strip marker carrier

0811969

https://www.phoenixcontact.com/us/products/0811969



Terminal strip marker carrier, adjustable height, for CLIPFIX 15, CLIPFIX 35, and CLIPFIX 35-5 end brackets, can be marked using labels in 20 x 8 mm format

UC-TM 8 - Marker for terminal blocks

0818072

https://www.phoenixcontact.com/us/products/0818072



Marker for terminal blocks, Card, white (RAL 9010), unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 56, text field height: 10.3 mm, text field width: 7.6 mm

Technical data

Notes

General	Quantity specifications on the set contents under downloads

Product properties

Product type	Starter kit

Connection data

Connection method	Screw connection

Dimensions

Width	225 mm
Height	315 mm
Depth	65 mm

Material specifications

Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Environmental and real-life conditions

Ambient conditions


Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Mounting


Mounting type	NS 35/7,5
	NS 35/15

Drawings

Circuit diagram

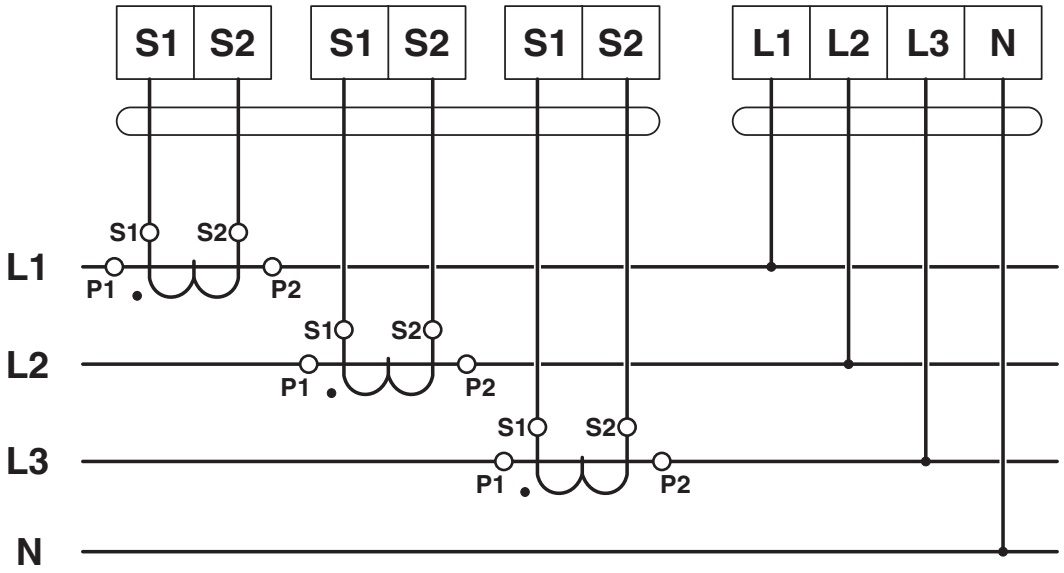

Circuit diagram

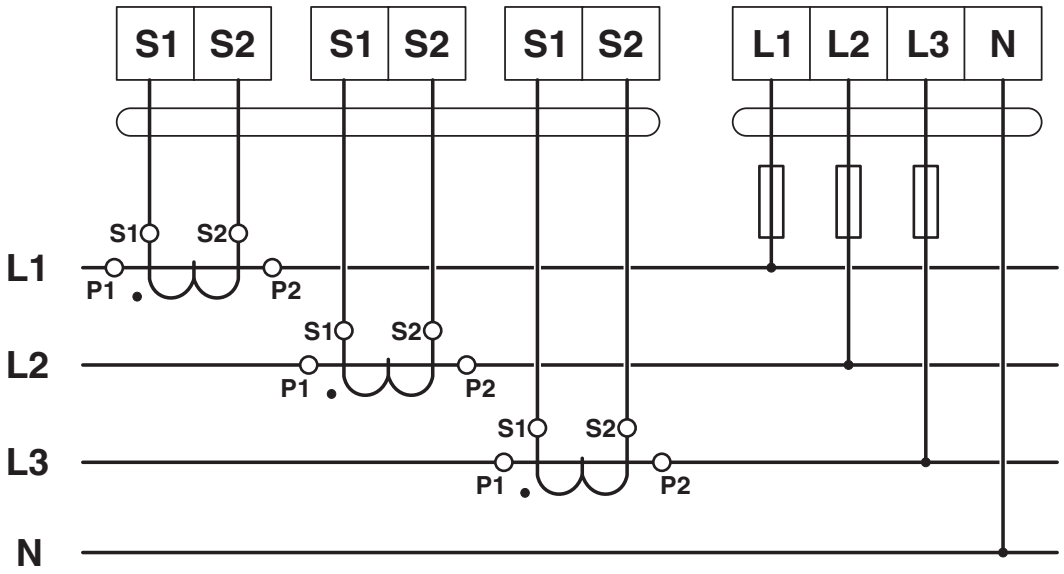

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/3036001

EAC
Approval ID: KZ7500651131219505

Classifications

ECLASS

ECLASS-13.0	27141190
ECLASS-15.0	27141190

ETIM

ETIM 10.0	EC002848

UNSPSC

UNSPSC 21.0	39121400

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)

EF3.1 Climate Change

CO2e kg	16.128 kg CO2e

Phoenix Contact 2026 © - all rights reserved
https://www.phoenixcontact.com

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com