


# STTB 2,5/4P-PE - Protective conductor double-level terminal block



3061499

<https://www.phoenixcontact.com/us/products/3061499>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Protective conductor double-level terminal block, connection method: Plug-in connection, 1st and 2nd level connection left, cross section:  $0.08 \text{ mm}^2 - 4 \text{ mm}^2$ , mounting type: NS 35/15, NS 35/7,5, color: green-yellow

## Your advantages

- Same shape and pitch as the PIN/PIN versions of the COMBI series
- Contact is made free from mechanical and electrical errors by simply snapping onto the DIN rail
- ST ...-PE meet all the requirements of standard IEC 60947-7-2
- Tested for railway applications

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 3061499       |
| Packing unit                         | 50 pc         |
| Minimum order quantity               | 50 pc         |
| Sales key                            | BE02          |
| Product key                          | BE2142        |
| GTIN                                 | 4046356588003 |
| Weight per piece (including packing) | 17.374 g      |
| Weight per piece (excluding packing) | 17.374 g      |
| Customs tariff number                | 85369010      |
| Country of origin                    | PL            |

# STTB 2,5/4P-PE - Protective conductor double-level terminal block



3061499

<https://www.phoenixcontact.com/us/products/3061499>

## Technical data

### Product properties

|                       |                       |
|-----------------------|-----------------------|
| Product type          | Ground terminal block |
| Product family        | ST                    |
| Area of application   | Railway industry      |
|                       | Machine building      |
|                       | Plant engineering     |
| Number of connections | 4                     |
| Number of rows        | 2                     |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|   |        |
|---|--------|
| Rated surge voltage                             | 6 kV   |
| Maximum power dissipation for nominal condition | 0.77 W |

### Connection data

|                                 |                     |
|---------------------------------|---------------------|
| Grounding foot                  | Yes                 |
| Number of connections per level | 2                   |
| Nominal cross section           | 2.5 mm <sup>2</sup> |

### 1st and 2nd level connection left

|   |  |
|---|--|
| Connection method   | Plug-in connection   |
| Note  | Please observe the current carrying capacity of the DIN rails. |
| Connection in acc. with standard                                  | IEC 61984  |
| Conductor cross-section rigid                                     | 0.08 mm <sup>2</sup> ... 4 mm <sup>2</sup>                     |
| Cross section AWG   | 28 ... 12 (converted acc. to IEC)                              |
| Conductor cross-section flexible                                  | 0.08 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>                   |
| Conductor cross-section, flexible [AWG]                           | 28 ... 14 (converted acc. to IEC)                              |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>                   |
| Flexible conductor cross-section (ferrule with plastic sleeve)    | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>                   |

### Dimensions

|                    |         |
|--------------------|---------|
| Width              | 5.2 mm  |
| End cover width    | 2.2 mm  |
| Height             | 98.8 mm |
| Depth on NS 35/7,5 | 47.5 mm |
| Depth on NS 35/15  | 55 mm   |

### Material specifications

# STTB 2,5/4P-PE - Protective conductor double-level terminal block



3061499

<https://www.phoenixcontact.com/us/products/3061499>

|   |              |
|---|--------------|
| Color   | green-yellow |
| Flammability rating according to UL 94                                  | V0           |
| Insulating material group   | I            |
| Insulating material   | PA           |
| Static insulating material application in cold                          | -60 °C       |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C       |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C       |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3  |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3  |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3  |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3  |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 28 MJ/kg     |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed       |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed       |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed       |

## Mechanical properties

### Mechanical data

|                 |     |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

## Environmental and real-life conditions

### Oscillation/broadband noise

|                        |  |
|------------------------|--|
| Specification          | DIN EN 50155 (VDE 0115-200):2008-03              |
| Spectrum               | Long life test category 1, class B, body mounted |
| Frequency              | $f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$   |
| ASD level              | 0.02g <sup>2</sup> /Hz                           |
| Acceleration           | 0.8g   |
| Test duration per axis | 5 h  |
| Test directions        | X-, Y- and Z-axis                                |
| Result                 | Test passed                                      |

### Shocks

|                                |                                     |
|--------------------------------|-------------------------------------|
| Specification                  | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape                    | Half-sine                           |
| Acceleration                   | 5g                                  |
| Shock duration                 | 30 ms                               |
| Number of shocks per direction | 3                                   |
| Test directions                | X-, Y- and Z-axis (pos. and neg.)   |
| Result                         | Test passed                         |

### Ambient conditions

|                                 |  |
|---------------------------------|--|
| Ambient temperature (operation) | -60 °C (max. operating temperature see derating curve) |
|---------------------------------|--|

# STTB 2,5/4P-PE - Protective conductor double-level terminal block



3061499

<https://www.phoenixcontact.com/us/products/3061499>

|  |   |
|--|---|
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly)           | -5 °C ... 70 °C   |
| Ambient temperature (actuation)          | -5 °C ... 70 °C   |
| Permissible humidity (operation)         | 20 % ... 90 %   |
| Permissible humidity (storage/transport) | 30 % ... 70 %   |

## Standards and regulations

|                                  |           |
|----------------------------------|-----------|
| Connection in acc. with standard | IEC 61984 |
|----------------------------------|-----------|

## Mounting

|               |           |
|---------------|-----------|
| Mounting type | NS 35/15  |
|               | NS 35/7,5 |


# STTB 2,5/4P-PE - Protective conductor double-level terminal block

3061499

<https://www.phoenixcontact.com/us/products/3061499>

## Drawings

Circuit diagram

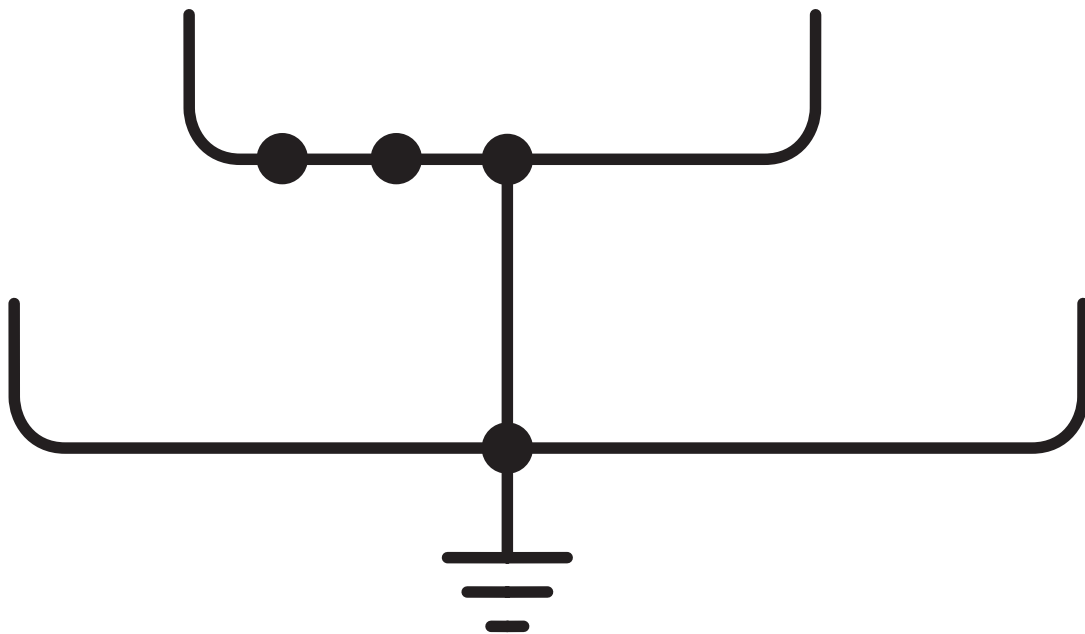

# STTB 2,5/4P-PE - Protective conductor double-level terminal block




3061499

<https://www.phoenixcontact.com/us/products/3061499>


## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3061499>

|  <b>CSA</b><br>Approval ID: 13631 |                       |                       |                   |                      |
|--|-----------------------|-----------------------|-------------------|----------------------|
|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
| B  | -                     | -                     | 28 - 12           | -                    |
| C  | -                     | -                     | 28 - 12           | -                    |
| D  | -                     | -                     | 28 - 12           | -                    |

|  <b>EAC</b><br>Approval ID: RU C-DE.BL08.B.00644 |  |  |  |  |
|---|--|--|--|--|
|---|--|--|--|--|

|  <b>cULus Recognized</b><br>Approval ID: E60425 |  |  |  |  |
|--|--|--|--|--|
|--|--|--|--|--|

|  <b>EAC</b><br>Approval ID: KZ7500651131219505 |  |  |  |  |
|---|--|--|--|--|
|---|--|--|--|--|

# STTB 2,5/4P-PE - Protective conductor double-level terminal block



3061499

<https://www.phoenixcontact.com/us/products/3061499>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27250104 |
| ECLASS-15.0 | 27250104 |

### ETIM

|           |          |
|-----------|----------|
| ETIM 10.0 | EC000901 |
|-----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# STTB 2,5/4P-PE - Protective conductor double-level terminal block



3061499

<https://www.phoenixcontact.com/us/products/3061499>

## Environmental product compliance

### EU RoHS

|   |                    |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

### China RoHS

|  |  |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E                                   |
|  | No hazardous substances above the limits |

### EU REACH SVHC

|                                     |                            |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)