

# PRC 5-FT25-MC - Device connector, rear mounting



1409206

<https://www.phoenixcontact.com/us/products/1409206>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector, rear mounting, Range of articles: PRC 35, housing material: PPE, color: black, number of positions: 5, rated voltage: 690 V AC, rated current: 35 A, Connection method: Crimp connection, Contact connection type: Pin. This item is also available with other cable lengths. For your specific requirements, please contact your local PHOENIX CONTACT subsidiary.

## Your advantages

- Up to 75% smaller in size than industrial connectors with the same rating
- Locking mechanism can be unlocked manually or using a tool
- Ideal for indoor and outdoor use due to weatherproof materials
- Either preassembled or designed for assembly

## Commercial data

Item number	1409206
Packing unit	1 pc
Minimum order quantity	50 pc
Sales key	AB03
Product key	ABLCAAC
Catalog page	Page 77 (NTK-2014)
GTIN	4046356864350
Weight per piece (including packing)	15.632 g
Weight per piece (excluding packing)	11.3 g
Customs tariff number	85389099
Country of origin	PL

## Technical data

### Notes

General	This item is also available with other cable lengths. For your specific requirements, please contact your local PHOENIX CONTACT subsidiary.
General	For assembly notes, please refer to the packing slip

### Safety note

Safety note	<ul style="list-style-type: none"> <li>• <b>WARNING:</b> Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.</li> <li>• <b>WARNING:</b> Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.</li> </ul> <p><b>WARNING:</b> The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> <ul style="list-style-type: none"> <li>• Assembled products may not be manipulated or improperly opened.</li> <li>• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a>).</li> <li>• When using the product in direct connection with third-party manufacturers, the user is responsible.</li> <li>• For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li> <li>• Ensure that the protective or functional ground has been properly connected.</li> <li>• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector</li> <li>• Observe the corresponding technical data. You will find information:             <ul style="list-style-type: none"> <li>o On the product</li> <li>o On the packing label</li> <li>o In the supplied documentation</li> <li>o Online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> under the product</li> </ul> </li> <li>• Only use tools recommended by Phoenix Contact</li> <li>• The installation notes/Design In documents online on the download page at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> must be observed for this product.</li> <li>• Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a></li> <li>• Operate the connector only when it is fully plugged in.</li> <li>• Operate the connector only when it is fully plugged in and interlocked.</li> </ul>
-------------	---

	<ul style="list-style-type: none"> <li>• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li> </ul>
	<ul style="list-style-type: none"> <li>• Observe the minimum bending radius of the cable. Lay the cable without twisting it.</li> </ul>
	<ul style="list-style-type: none"> <li>• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).</li> </ul>

## Product properties

Product type	Panel feed-through
Product family	PRC 35
Number of positions	5
Connection profile	4+PE
Coding	AD

## Insulation characteristics

Protection class	II
Degree of pollution	2

## Connection data

### Conductor connection

Tightening torque	2.5 Nm $\pm$ 0.1 Nm (Tightening torque nut)
-------------------	---

## Dimensions

Dimensional drawing	
Width	35 mm
Height	46.6 mm
Length	35 mm
Hole diameter	25.5 mm
Wrench size, union nut	32 mm

## Electrical properties

Rated voltage (III/2)	690 V
Nominal voltage ATD	690 V AC (III/2) in accordance with IEC 61984
	500 V AC (III/2) in accordance with IEC 61535/2 PfG 1915
	600 V AC / DC (III/2) in accordance with UL 2238 / UL 2237
	500 V DC (III/2) in accordance with IEC 61535
Rated surge voltage (III/2)	8 kV
Rated current	35 A (With 6 mm <sup>2</sup> conductor cross section in accordance with IEC 61984)

1409206

<https://www.phoenixcontact.com/us/products/1409206>

	32 A (With 6 mm <sup>2</sup> conductor cross section in accordance with IEC 61535)
	21.4 A (With 6 mm <sup>2</sup> conductor cross section and 85 °C in accordance with 2 PfG 1915)
	28 A (with AWG 10, in accordance with UL 2237)

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	100
Insertion force	40 N ±10 N

## Material specifications

Color	black
Color of the housing part	black
Flammability rating according to UL 94	V0
Insulating material group	I / CTI 600
Seal material	EPDM
Contact carrier material	PPE
O-ring material	Silicon
Material for screw connection	PPE
Housing material	PPE

## Cable/line

Halogen-free	yes
--------------	-----

## Mounting

Mounting type	Rear mounting
Connection method	Crimp connection

## Environmental and real-life conditions

### Ambient conditions

Degree of protection (when plugged in)	IP66 / IP68 (2m / 24h) / IP69K
Degree of protection (not plugged in)	IP65 (Longitudinal watertightness, only in conjunction with contacts from the accessories range)
Degree of protection	IP66 / IP68 (2m / 24h) / IP69K
Ambient temperature (operation)	-40 °C ... 105 °C (dependent on the derating curve)
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	5 °C ... 85 °C

## Standards and regulations

Standards/specifications	IEC 61984:2008
	EN 61984:2008
	DIN EN IEC 61535:2020
	IEC 61535:2019
	2 PfG 1915/03.2015

# PRC 5-FT25-MC - Device connector, rear mounting



1409206

<https://www.phoenixcontact.com/us/products/1409206>

---

UL 2237 Ed.1:2021-01-08

---

CSA C22.2 No. 182.3-16 Ed.2:2019-01

---


# PRC 5-FT25-MC - Device connector, rear mounting




1409206

<https://www.phoenixcontact.com/us/products/1409206>

## Drawings

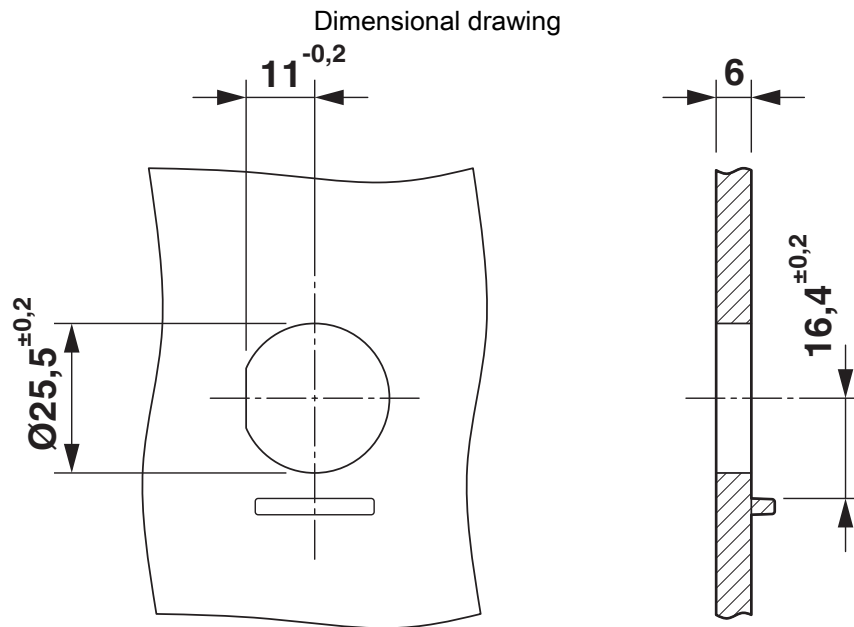

## Housing cutout

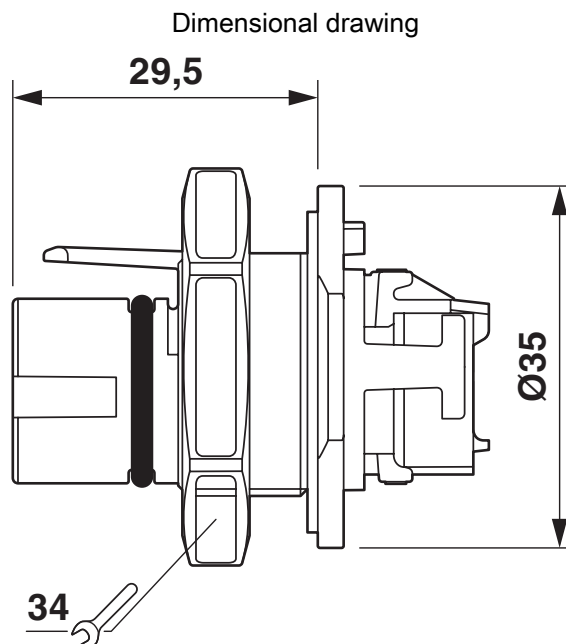


## Dimensional drawing

# PRC 5-FT25-MC - Device connector, rear mounting

1409206

<https://www.phoenixcontact.com/us/products/1409206>

Schematic diagram

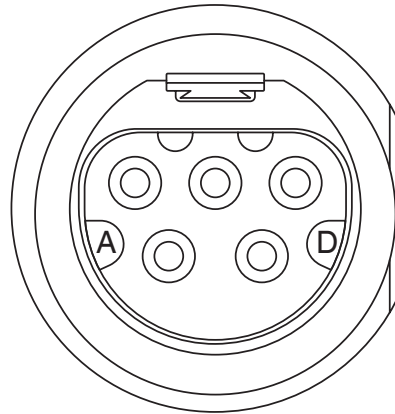

Connector pin assignment

# PRC 5-FT25-MC - Device connector, rear mounting




1409206


<https://www.phoenixcontact.com/us/products/1409206>


## Approvals


To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1409206>


	<b>DNV GL</b> Approval ID: TAE00002KM
---	--


	<b>UL Listed</b> Approval ID: E221474-20150513								
	<table border="1"> <thead> <tr> <th>Nominal voltage <math>U_N</math></th> <th>Nominal current <math>I_N</math></th> <th>Cross section AWG</th> <th>Cross section <math>mm^2</math></th> </tr> </thead> <tbody> <tr> <td>600 V</td> <td>30 A</td> <td>-</td> <td>14 - 10</td> </tr> </tbody> </table>	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$	600 V	30 A	-	14 - 10
Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$						
600 V	30 A	-	14 - 10						


	<b>cUL Listed</b> Approval ID: E221474-20150513								
	<table border="1"> <thead> <tr> <th>Nominal voltage <math>U_N</math></th> <th>Nominal current <math>I_N</math></th> <th>Cross section AWG</th> <th>Cross section <math>mm^2</math></th> </tr> </thead> <tbody> <tr> <td>600 V</td> <td>30 A</td> <td>14 - 10</td> <td>-</td> </tr> </tbody> </table>	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$	600 V	30 A	14 - 10	-
Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$						
600 V	30 A	14 - 10	-						

	<b>TÜV Rheinland</b> Approval ID: R 60168292 0001								
	<table border="1"> <thead> <tr> <th>Nominal voltage <math>U_N</math></th> <th>Nominal current <math>I_N</math></th> <th>Cross section AWG</th> <th>Cross section <math>mm^2</math></th> </tr> </thead> <tbody> <tr> <td>690 V</td> <td>35 A</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$	690 V	35 A	-	-
Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$						
690 V	35 A	-	-						

	<b>TÜV Rheinland</b> Approval ID: R 60117908								
	<table border="1"> <thead> <tr> <th>Nominal voltage <math>U_N</math></th> <th>Nominal current <math>I_N</math></th> <th>Cross section AWG</th> <th>Cross section <math>mm^2</math></th> </tr> </thead> <tbody> <tr> <td>500 V</td> <td>21.4 A</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$	500 V	21.4 A	-	-
Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$						
500 V	21.4 A	-	-						

	<b>TÜV Rheinland</b> Approval ID: R 60168255 0001								
	<table border="1"> <thead> <tr> <th>Nominal voltage <math>U_N</math></th> <th>Nominal current <math>I_N</math></th> <th>Cross section AWG</th> <th>Cross section <math>mm^2</math></th> </tr> </thead> <tbody> <tr> <td>500 V</td> <td>32 A</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$	500 V	32 A	-	-
Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$						
500 V	32 A	-	-						

	<b>cUL Listed</b> Approval ID: E468743-20190809								
	<table border="1"> <thead> <tr> <th>Nominal voltage <math>U_N</math></th> <th>Nominal current <math>I_N</math></th> <th>Cross section AWG</th> <th>Cross section <math>mm^2</math></th> </tr> </thead> <tbody> <tr> <td>600 V</td> <td>24 A</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$	600 V	24 A	-	-
Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$						
600 V	24 A	-	-						

	<b>UL Listed</b> Approval ID: E468743-20190809								
	<table border="1"> <thead> <tr> <th>Nominal voltage <math>U_N</math></th> <th>Nominal current <math>I_N</math></th> <th>Cross section AWG</th> <th>Cross section <math>mm^2</math></th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$				
Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$						



# PRC 5-FT25-MC - Device connector, rear mounting



1409206

<https://www.phoenixcontact.com/us/products/1409206>

	600 V	30 A	-	-
--	-------	------	---	---

# PRC 5-FT25-MC - Device connector, rear mounting



1409206

<https://www.phoenixcontact.com/us/products/1409206>

## Classifications

### ECLASS

ECLASS-11.0	27440109
ECLASS-12.0	27440109
ECLASS-13.0	27440109

### ETIM

ETIM 9.0	EC003569
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# PRC 5-FT25-MC - Device connector, rear mounting



1409206

<https://www.phoenixcontact.com/us/products/1409206>

## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# PRC 5-FT25-MC - Device connector, rear mounting



1409206

<https://www.phoenixcontact.com/us/products/1409206>

## Accessories

### CRIMPFOX-1,6/2,5-ED-4,0 - Crimping pliers

1687419

<https://www.phoenixcontact.com/us/products/1687419>



Crimping pliers, for turned contacts, CK 1.6 ED... and CK 2.5 ED...

---

### CK2,5-M-2,5 AG - Crimp contact

1409207

<https://www.phoenixcontact.com/us/products/1409207>



Crimp contact, Range of articles: PRC 35, max. conductor cross section: 2.5 mm<sup>2</sup>, rated voltage: 690 V AC, rated current: 24 A, Connection method: Crimp connection, Contact connection type: Pin. Crimping recommendation: Crimp the conductors with the crimp contact in accordance with DIN EN 60352-2.

# PRC 5-FT25-MC - Device connector, rear mounting



1409206

<https://www.phoenixcontact.com/us/products/1409206>

## CK2,5-M-4 AG - Crimp contact

1409208

<https://www.phoenixcontact.com/us/products/1409208>



Crimp contact, Range of articles: PRC 35, max. conductor cross section: 4 mm<sup>2</sup>, rated voltage: 690 V AC, rated current: 32 A, Connection method: Crimp connection, Contact connection type: Pin. Crimp the wire with the crimp contact in accordance with DIN EN 60352-2

---

## CK2,5-M-6 AG - Crimp contact

1409209

<https://www.phoenixcontact.com/us/products/1409209>



Crimp contact, Range of articles: PRC 35, max. conductor cross section: 6 mm<sup>2</sup>, rated voltage: 690 V AC, rated current: 35 A, Connection method: Crimp connection, Contact connection type: Pin. Crimp the wire with the crimp contact in accordance with DIN EN 60352-2

## PRC 5-FT25-MC - Device connector, rear mounting



1409206

<https://www.phoenixcontact.com/us/products/1409206>

## SZF 1-0,6X3,5 - Screwdriver

1204517

<https://www.phoenixcontact.com/us/products/1204517>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

## PRC COVER M - Protective cap

1409237

<https://www.phoenixcontact.com/us/products/1409237>



Protective cap, Range of articles: PRC 35, housing material: PPE, color: black, rated voltage: 1000. Suitable for connectors (MS)

# PRC 5-FT25-MC - Device connector, rear mounting



1409206

<https://www.phoenixcontact.com/us/products/1409206>

## SZF 0-0,4X2,5 - Screwdriver

1204504

<https://www.phoenixcontact.com/us/products/1204504>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip

---

## CRIMPFOX-4,0-ED-6,00 - Crimping pliers

1205859

<https://www.phoenixcontact.com/us/products/1205859>



Crimping pliers, for CK 4,0... contacts, for 4.0 - 6.0 mm<sup>2</sup> conductor cross sections

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)