

PR2-RSP3-LV-120AC/4X21AU - Relay module



2834782

<https://www.phoenixcontact.com/us/products/2834782>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Pre-assembled relay modules with spring-cage connection, consisting of a relay base, industrial relay with integrated LED and engage/disengage manual actuate lever, varistor module, and retaining bracket. Input voltage: 120 V AC, 4 changeover contacts with gold-plated contacts, 5 A

The figure shows the 24 V DC version

Your advantages

- With DC types, freewheeling diode is integrated in relay
- Relay with detectable manual operation and status LED
- Logical contact arrangement thanks to 1/3-level relay base
- 4-changeover contact types with multi-layer gold contacts
- Mechanical switch position indicator

Commercial data

Item number	2834782
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	C463
Product key	DK632H
GTIN	4017918996307
Weight per piece (including packing)	141.41 g
Weight per piece (excluding packing)	141.41 g
Customs tariff number	85364900
Country of origin	JP

PR2-RSP3-LV-120AC/4X21AU - Relay module



2834782

<https://www.phoenixcontact.com/us/products/2834782>

Set consists of

PR2-BSP3/4X21 - Relay base

2833589

<https://www.phoenixcontact.com/us/products/2833589>



Relay base PR2-B, for industrial relay REL-IR with 2 or 4 changeover contacts, 1/3-level design, spring-cage connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5

REL-IR/L-120AC/4X21AU - Single relay

2834135

<https://www.phoenixcontact.com/us/products/2834135>



Plug-in industrial relay with power contacts and additional hard gold plating, 4 changeover contacts, test button, status LED, mechanical switching position indicator, coil voltage: 120 V AC

PR2-RSP3-LV-120AC/4X21AU - Relay module

2834782

<https://www.phoenixcontact.com/us/products/2834782>



V-120-230UC - Plug-in module

2833880

<https://www.phoenixcontact.com/us/products/2833880>



Plug-in module, with varistor, input voltage: 120 ... 230 V AC/DC $\pm 20\%$

EL2-P35 - Retaining bracket

2833592

<https://www.phoenixcontact.com/us/products/2833592>



Relay retaining bracket, with eject function and integrated equipment marking area (8 x 25 mm), to suit relay base PR2, for 35 mm high industrial relay

Technical data

Product properties

Product type	Relay Module
Application	Universal
Operating mode	100% operating factor
Mechanical service life	5x 10 ⁷ cycles

Insulation characteristics

Overvoltage category	II
Pollution degree	2

Data management status

Date of last data management	01.04.2026
------------------------------	------------

Electrical properties

Service life electrical	see diagram
Maximum power dissipation for nominal condition	1.32 W
Test voltage (Winding/contact)	2 kV AC (50 Hz, 1 min., winding/contact)
Test voltage (Contact/contact)	2 kV AC (50 Hz, 1 min., contact/contact)

Input data

Coil side

Nominal input voltage U _N	120 V AC
Input voltage range	93.6 V AC ... 180 V AC
Drive and function	monostable
Typical input current at U _N	11 mA (at 50 Hz)
	9 mA (At 60 Hz)
Typical response time	4 ms ... 10 ms
Typical release time range	3 ms ... 12 ms
Protective circuit	Varistor
Operating voltage display	LED red

Output data

Switching

Contact switching type	4 changeover contacts
Type of switch contact	Single contact
Contact material	AgNi, hard gold-plated
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	1 V
Limiting continuous current	5 A
Maximum inrush current	12 A (15 ms)
Min. switching current	1 mA

PR2-RSP3-LV-120AC/4X21AU - Relay module



2834782

<https://www.phoenixcontact.com/us/products/2834782>

Interrupting rating (ohmic load) max.	120 W (at 24 V DC)
	100 W (at 48 V DC)
	78 W (at 60 V DC)
	55 W (at 110 V DC)
	80 W (at 220 V DC)
	1250 VA (for 250 V AC)

Connection data

Coil side

Connection method	Spring-cage connection
Stripping length	12 mm
Conductor cross-section rigid	0.2 mm ² ... 1.5 mm ²
Conductor cross-section flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross-section AWG	24 ... 16

Contact side

Connection method	Spring-cage connection
Stripping length	12 mm
Conductor cross-section rigid	0.2 mm ² ... 1.5 mm ²
Conductor cross-section flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross-section AWG	24 ... 16

Dimensions

Width	31 mm
Height	95 mm
Depth	84 mm

Material specifications

Color	green (RAL 6021)
-------	------------------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C

Standards and regulations

Standards/regulations	IEC 60664
	EN 50178

Mounting

Mounting type	DIN rail mounting
Assembly note	in rows with zero spacing
Mounting position	any


Drawings

Diagram




Operating voltage range of relay $T_u=T_{coil}$


Diagram

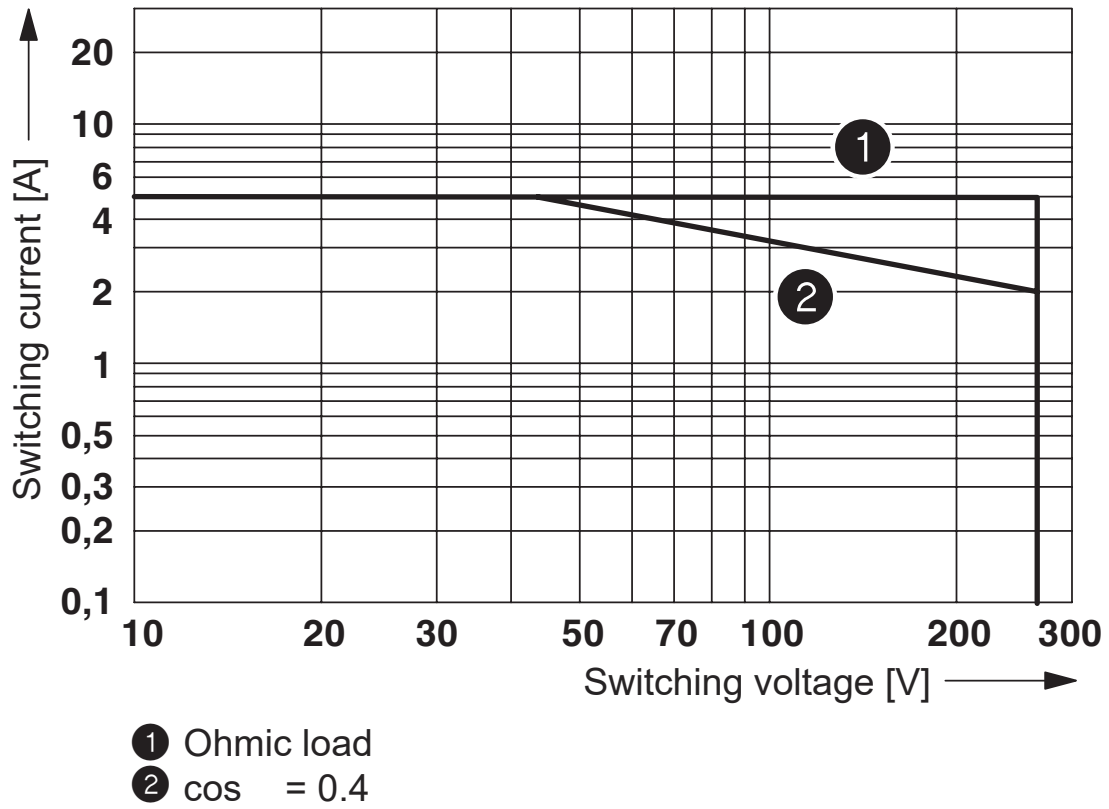

AC interrupting rating

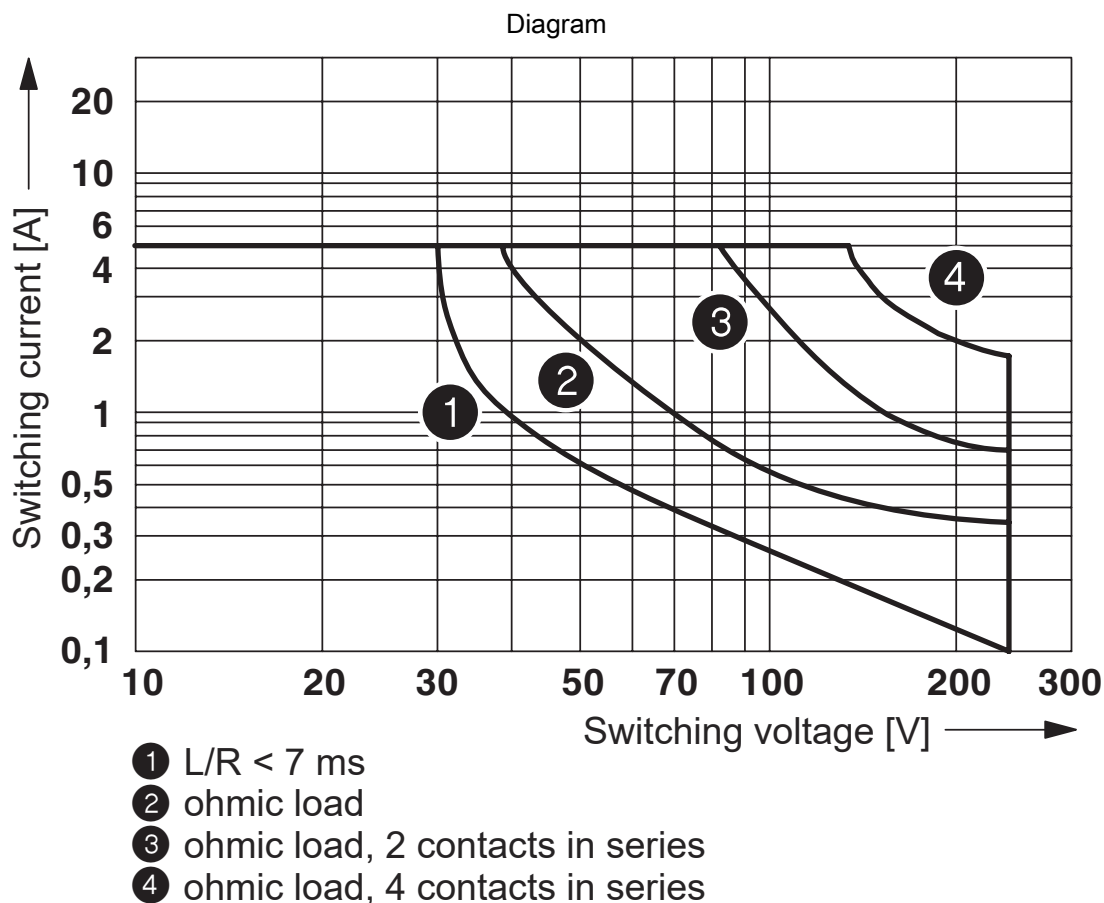

DC interrupting rating

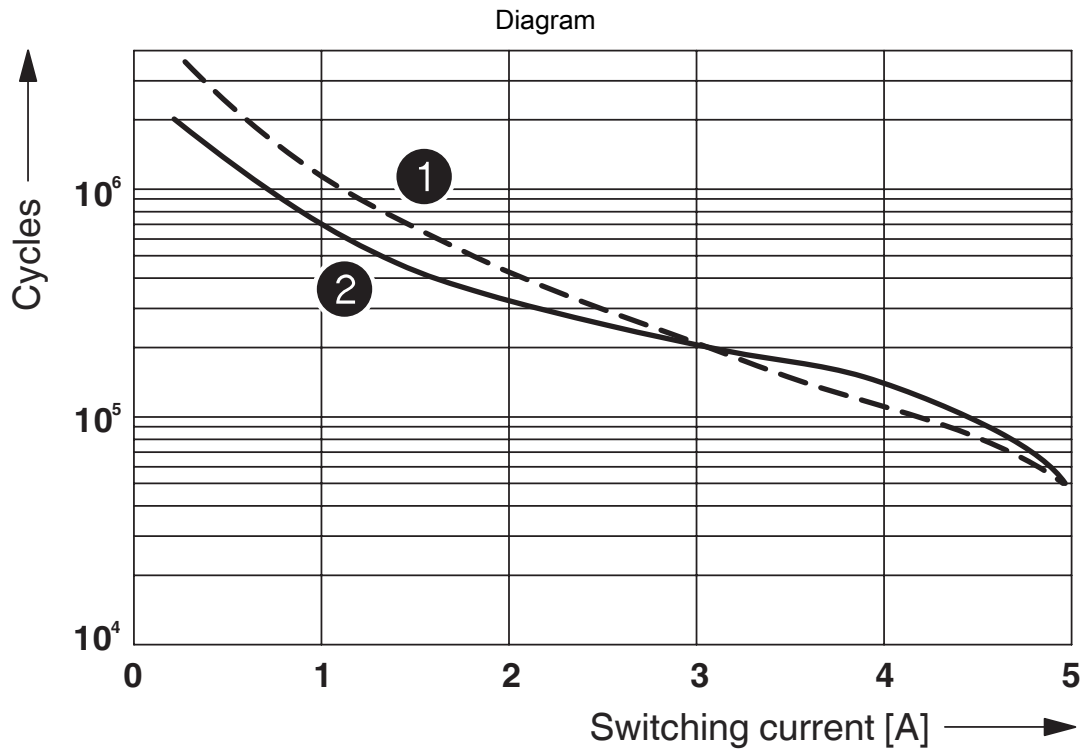

- ① 250 V AC, ohmic load
- ② 30 V DC, ohmic load

Electrical service life


PR2-RSP3-LV-120AC/4X21AU - Relay module



2834782

<https://www.phoenixcontact.com/us/products/2834782>

Circuit diagram

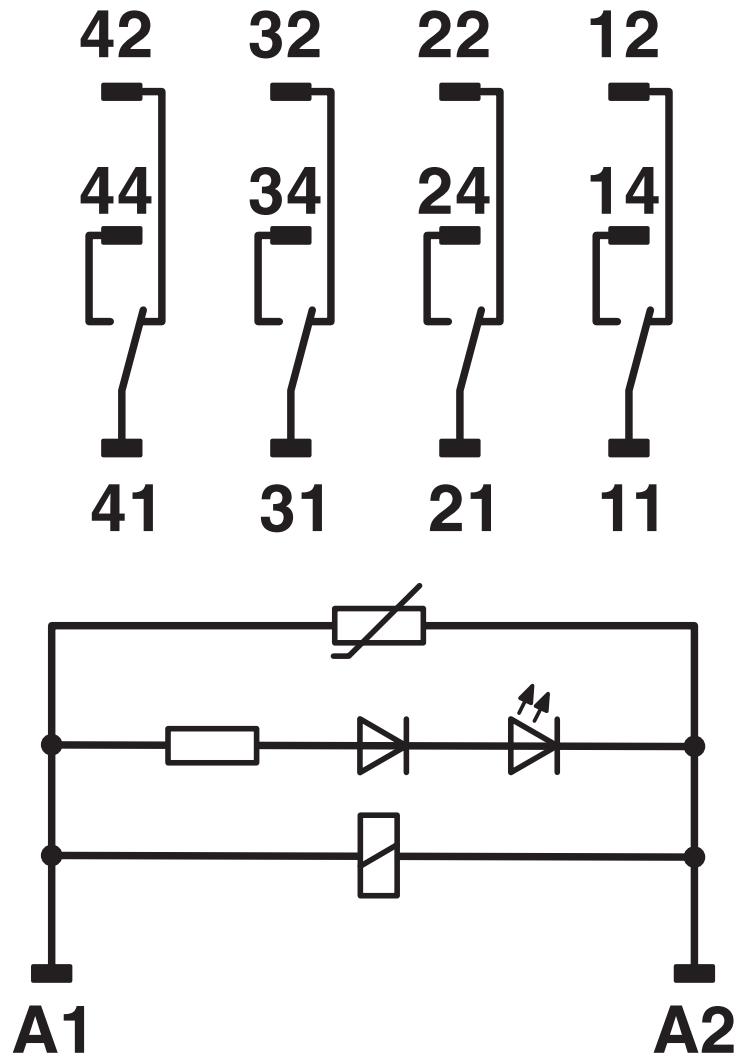

PR2-RSP3-LV-120AC/4X21AU - Relay module



2834782

<https://www.phoenixcontact.com/us/products/2834782>

Classifications

UNSPSC

UNSPSC 21.0	39122334
-------------	----------

PR2-RSP3-LV-120AC/4X21AU - Relay module



2834782

<https://www.phoenixcontact.com/us/products/2834782>

Environmental product compliance

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com