

EV-CC-AC1-M3-CBC-RCM-ETH - AC charging controller



1018701

<https://www.phoenixcontact.com/us/products/1018701>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

AC charging controller in accordance with IEC 61851-1, client or stand-alone, Modbus/TCP via Ethernet, connection for RFID reader and energy meter via RS-485, DC residual current monitoring, connector release in the event of power failure



Product description

Mode 3 controller for charging electric vehicles in accordance with IEC 61851-1 for charging case B and C with integrated DC residual current monitoring and Ethernet communication interface.

Commercial data

Item number	1018701
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	EM01
Product key	XWBRCA
GTIN	4055626503691
Weight per piece (including packing)	538.3 g
Weight per piece (excluding packing)	538.3 g
Customs tariff number	85371098
Country of origin	DE

EV-CC-AC1-M3-CBC-RCM-ETH - AC charging controller



1018701

<https://www.phoenixcontact.com/us/products/1018701>

Technical data

Product properties

Product type	AC charging controller
Product family	CHARX control advanced plus
Charging mode	Mode 3, Case B + C
Operating mode	Stand-Alone Client
Modem for communication present	no
Number of charging points	1

Electrical properties

Type of charging current	AC
--------------------------	----

Measuring range: Residual current

Rated frequency f_n	≤ 2000 Hz
Nominal differential current	± 300 mA
Residual current $I_{\Delta n}$	30 mA (AC) 6 mA (DC)
Rated current I_n	32 A (Three-phase, 4x6 mm ²) 48 A (Single-phase)
Tripping time for $I_{\Delta n}$	< 180 ms
Response time for $2 \times I_{\Delta n}$	< 70 ms
Tripping time for $5 \times I_{\Delta n}$	< 20 ms

Input data

Digital

Number of digital inputs	5
Description of the input	Digital input
Nominal current I_N	≤ 4 mA
Nominal input voltage U_N	12 V
Input voltage range	0 V ... 3 V (Off)
Input voltage range U_2	9 V ... 15 V (On)

Output data

Digital

Output name	4 digital outputs
Connection technology	Screw connection
Maximum output voltage	30 V
Maximum output current	0.2 A (Total current for all outputs; internally supplied)
Maximum output current per channel	0.6 A (Per output; externally supplied)

Switching

EV-CC-AC1-M3-CBC-RCM-ETH - AC charging controller



1018701

<https://www.phoenixcontact.com/us/products/1018701>

Output name	Relay output C _{1,2}
Minimum switching power	4000 VA
Maximum switching voltage	250 V AC (External supply)
Max. switching current	16 A

Switching

Output name	Motor switching output
Maximum switching voltage	12 V (Internal supply)
Max. switching current	1 A (maximum)

Connection data

Conductor cross-section rigid	0.2 mm ² ... 4 mm ²
Conductor cross-section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross-section AWG	24 ... 12
Conductor cross-section rigid	0.14 mm ² ... 1.5 mm ²
Conductor cross-section flexible	0.2 mm ² ... 1 mm ²
Conductor cross-section AWG	26 ... 16

Interfaces

Interface	Ethernet (1x)
-----------	---------------

RS-485

Interface	RS-485 2-wire
Bus system	RS-485
Connection method	Screw connection
Number of interfaces	1 (for energy measurement device and RFID reader)
Number of supported devices	2
Transmission speed range	4.8 kbps ... 115.2 kbps (adjustable)
Protocols supported	Modbus/RTU (Master)

Ethernet

Interface	Ethernet
Connection method	RJ45 jack
Number of interfaces	1
Serial transmission speed	10/100 Mbps
Transmission length	100 m
Protocols supported	Modbus/TCP

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	< 2000 m
Permissible humidity (operation)	30 % ... 95 % (non-condensing)

EV-CC-AC1-M3-CBC-RCM-ETH - AC charging controller



1018701

<https://www.phoenixcontact.com/us/products/1018701>

EMC data

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Low Voltage Directive	Conformance with Low Voltage Directive 2014/35/EC
Noise immunity	EN 61000-6-2
Immunity to the discharge of static electricity	EN 61000-4-2: 8 kV air, 4 kV contact discharge
Immunity to electromagnetic fields	EN 61 000-4-3, 80---1000 MHz, 10 V/m
Immunity to conducted high frequency	EN 61 000-4-6, 0.15...80 MHz, 10 V
Immunity to fast transients (Burst)	EN 61 000-4-4: 2 kV AC mains input, 1 kV data cable
Housing	DIN 43880

Noise emission

Standards/regulations	EN 61000-6-3
-----------------------	--------------

Standards and regulations

Standards

Standards/regulations	IEC 61851-1
-----------------------	-------------

Mounting

Mounting type	DIN rail mounting
Mounting position	any


EV-CC-AC1-M3-CBC-RCM-ETH - AC charging controller

1018701


<https://www.phoenixcontact.com/us/products/1018701>

Drawings


Dimensional drawing

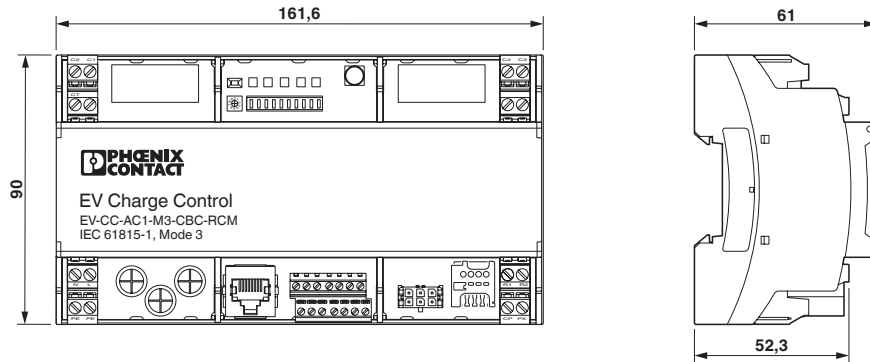

Dimensional drawing

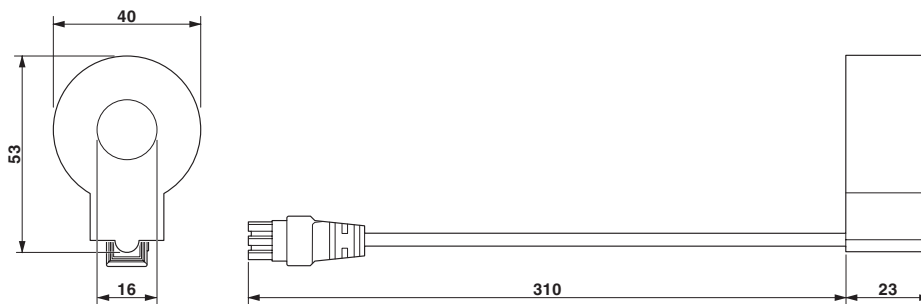

Connection diagram

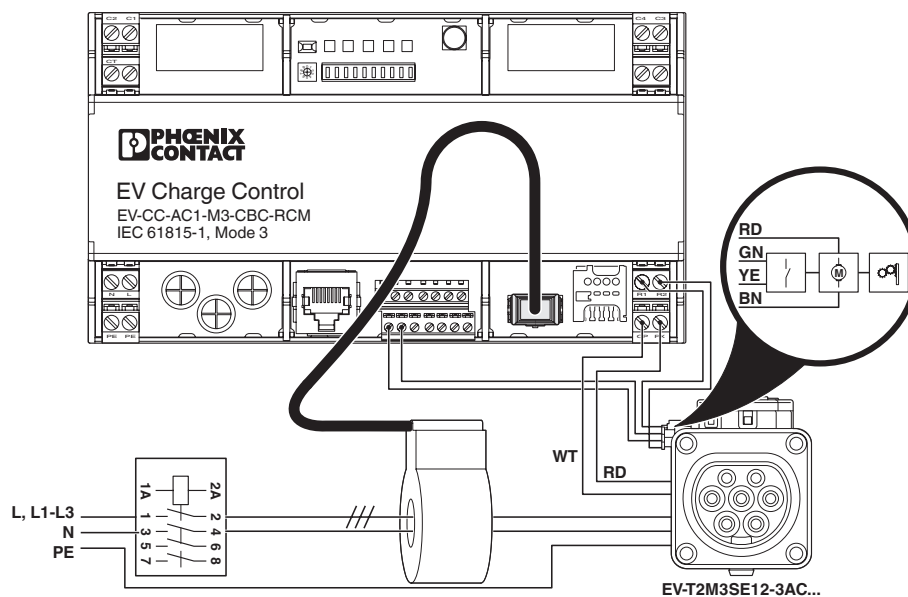


EV-CC-AC1-M3-CBC-RCM-ETH - AC charging controller


1018701

<https://www.phoenixcontact.com/us/products/1018701>


Connection diagram

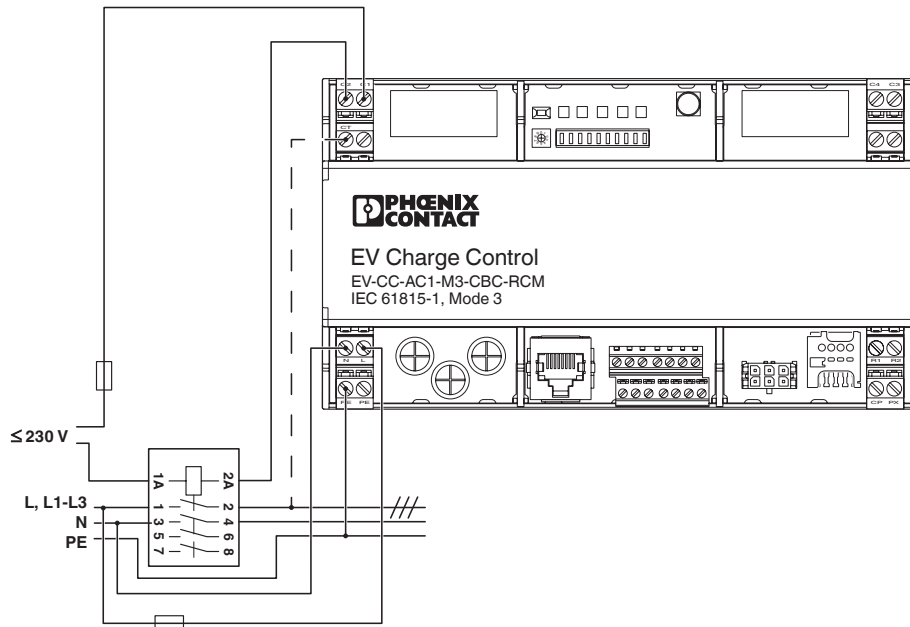

Connection diagram

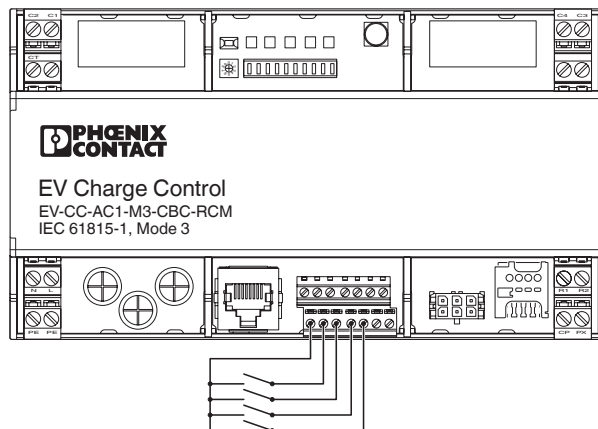

Connection diagram

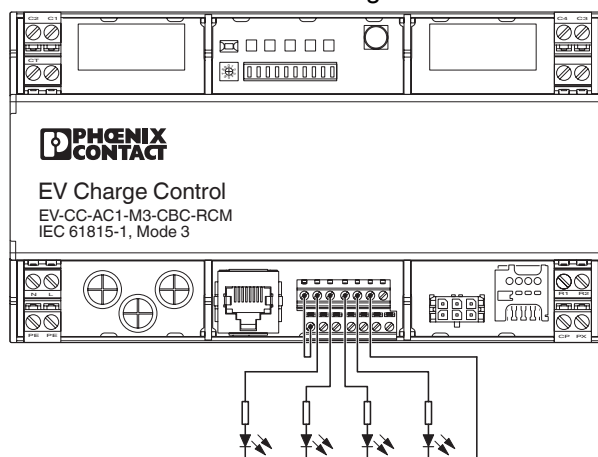


EV-CC-AC1-M3-CBC-RCM-ETH - AC charging controller




1018701

<https://www.phoenixcontact.com/us/products/1018701>

Connection diagram

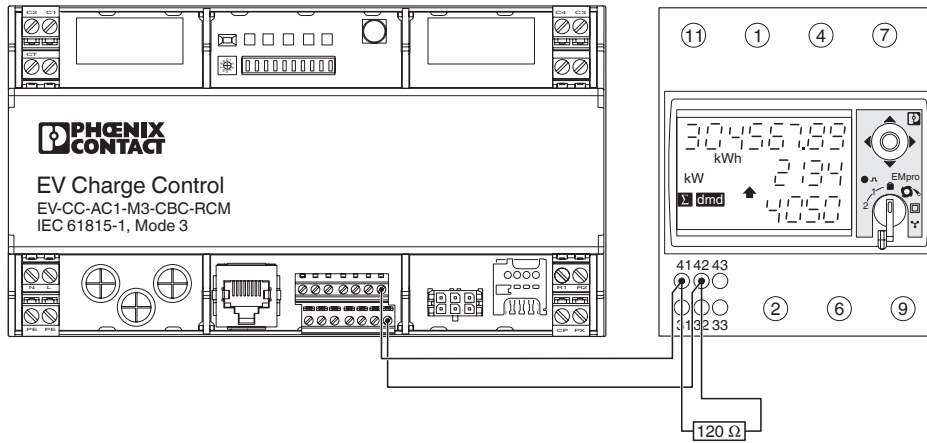

Connection diagram

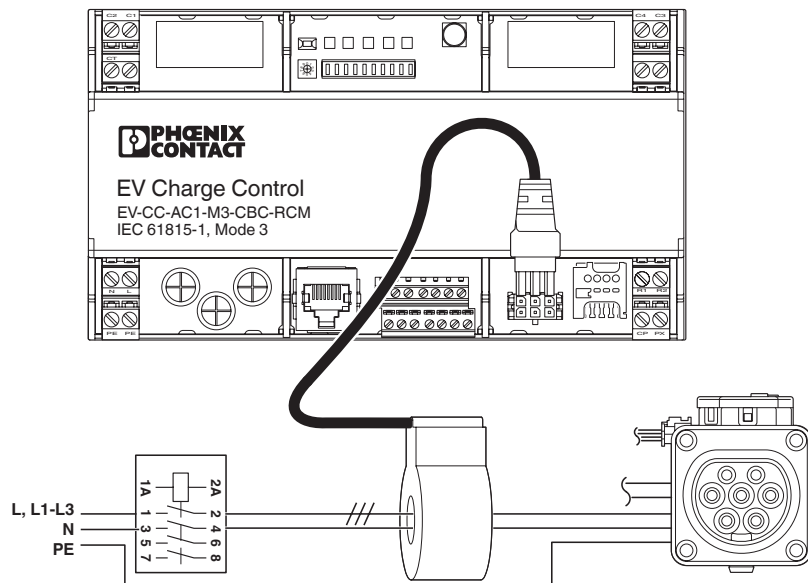


EV-CC-AC1-M3-CBC-RCM-ETH - AC charging controller




1018701

<https://www.phoenixcontact.com/us/products/1018701>


Connection diagram

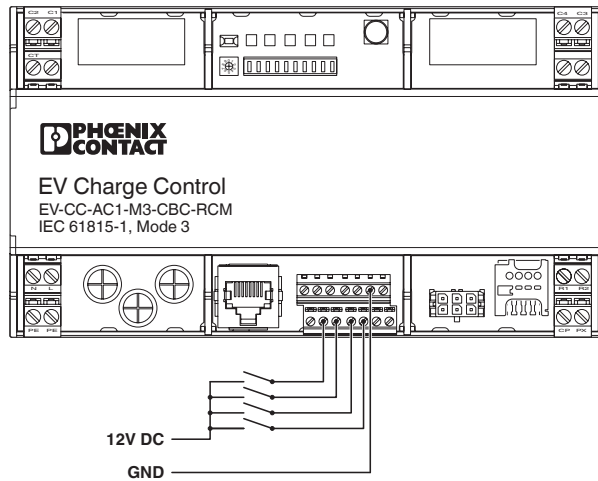

Connection diagram

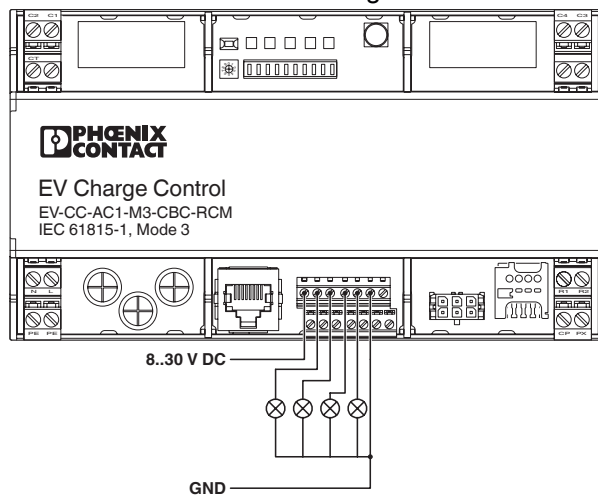

Connection diagram

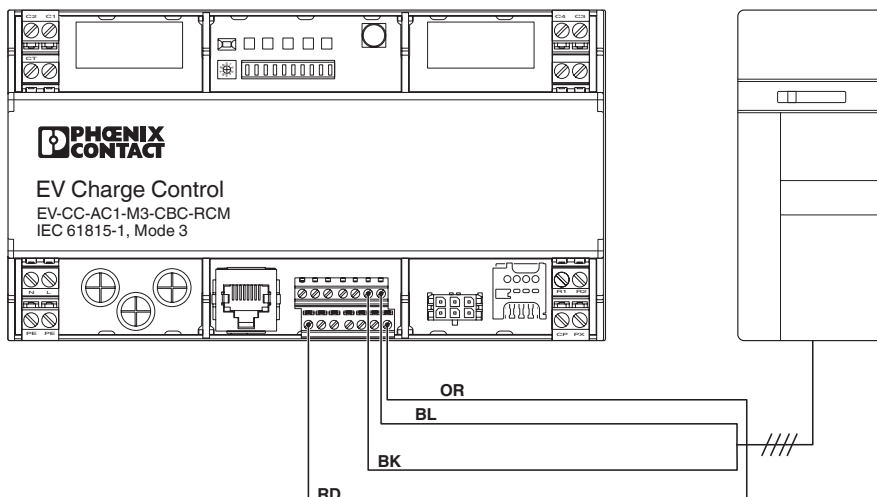


EV-CC-AC1-M3-CBC-RCM-ETH - AC charging controller




1018701

<https://www.phoenixcontact.com/us/products/1018701>

Schematic diagram

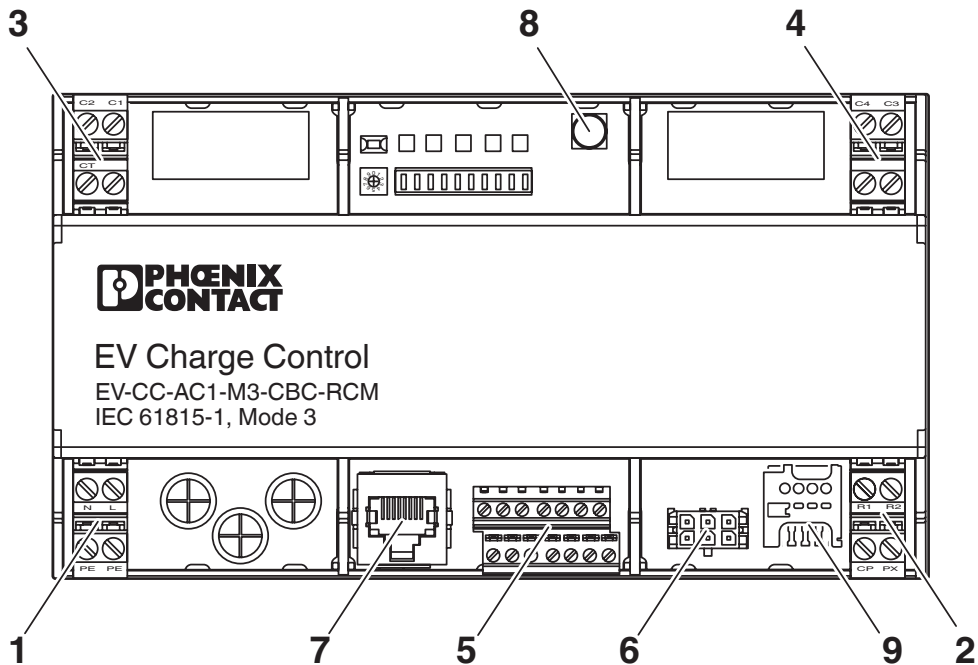


Schematic diagram

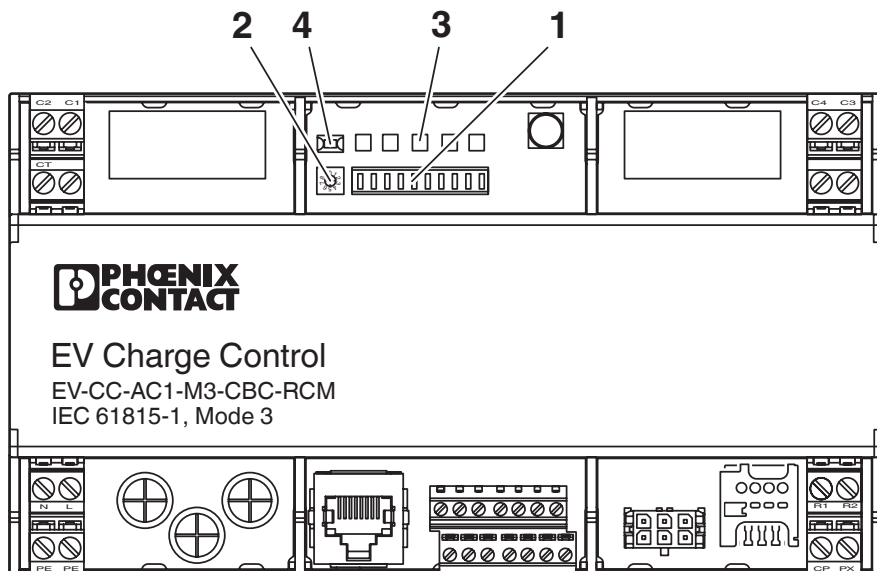


EV-CC-AC1-M3-CBC-RCM-ETH - AC charging controller

1018701

<https://www.phoenixcontact.com/us/products/1018701>

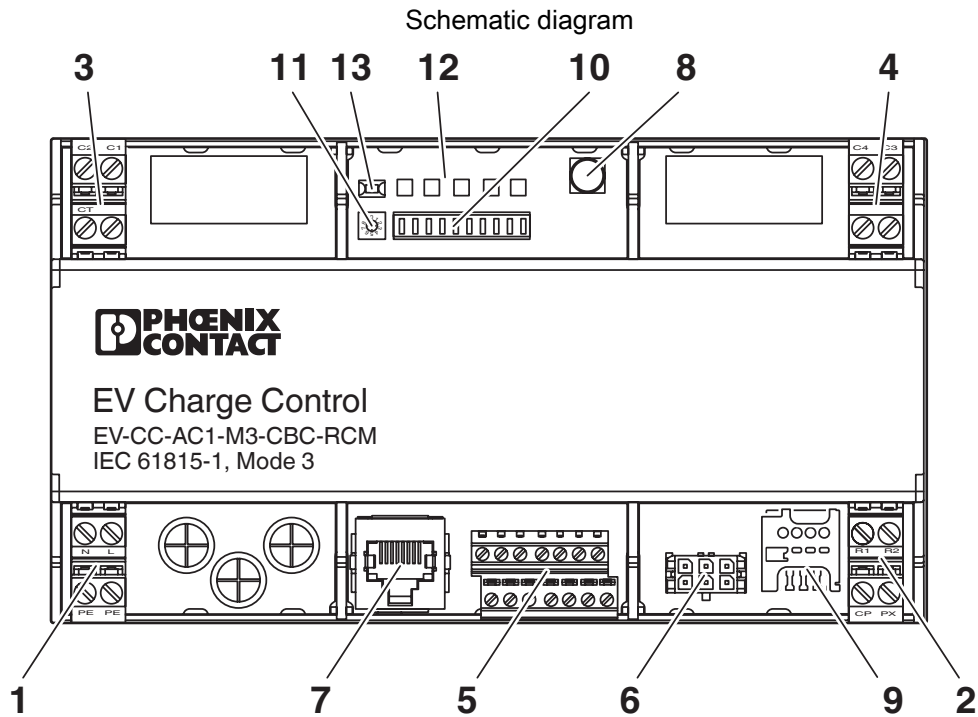

Schematic diagram


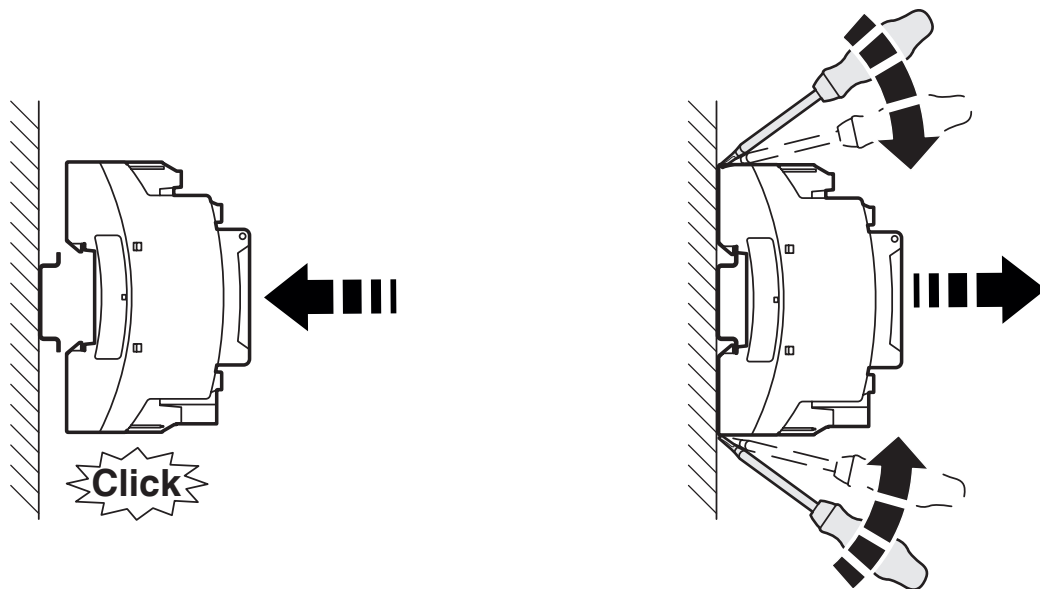


EV-CC-AC1-M3-CBC-RCM-ETH - AC charging controller



1018701

<https://www.phoenixcontact.com/us/products/1018701>

Schematic diagram

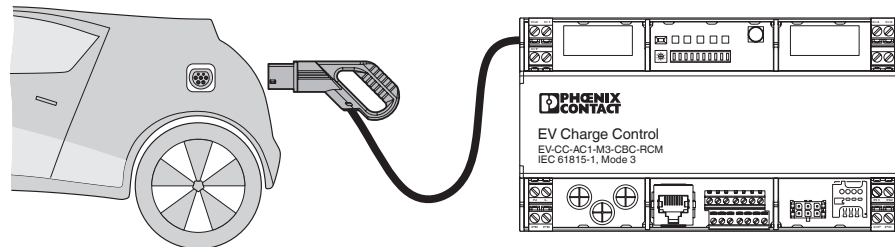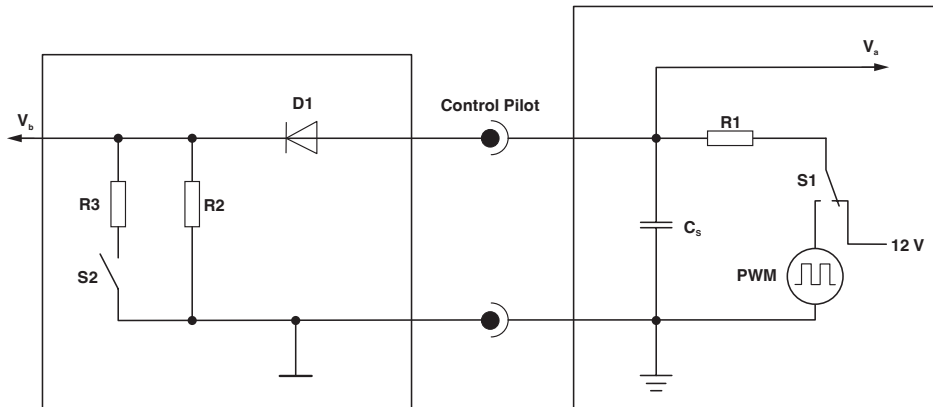

Schematic diagram

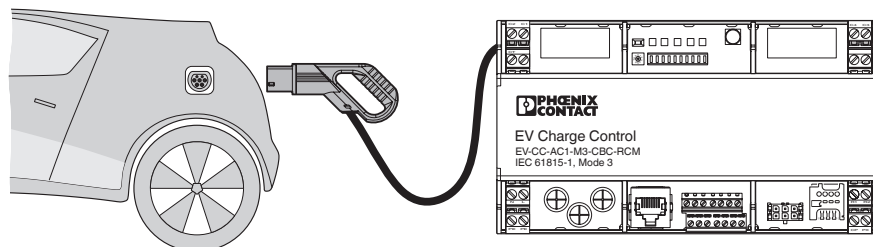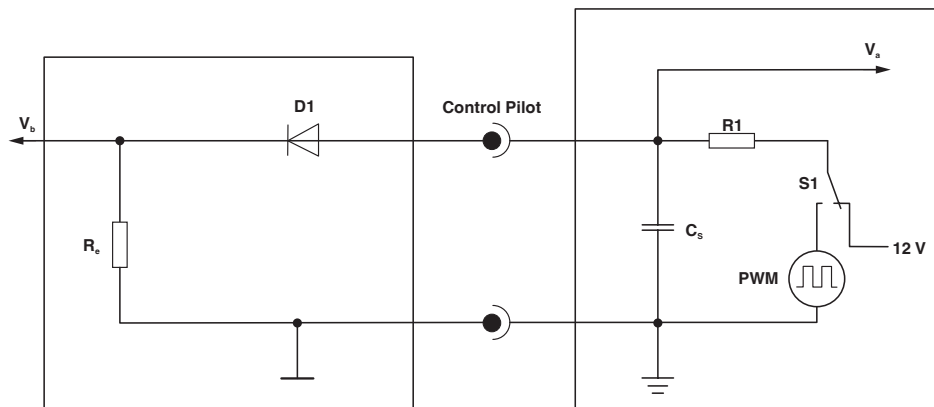

EV-CC-AC1-M3-CBC-RCM-ETH - AC charging controller



1018701

<https://www.phoenixcontact.com/us/products/1018701>

Classifications

ECLASS

ECLASS-13.0	27144703
ECLASS-15.0	27144703

ETIM

ETIM 10.0	EC002889
-----------	----------

UNSPSC

UNSPSC 21.0	39121800
-------------	----------

EV-CC-AC1-M3-CBC-RCM-ETH - AC charging controller



1018701

<https://www.phoenixcontact.com/us/products/1018701>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com