

SACCBP-M12MS-5CON-M16/1,0-923 - Device connector rear mounting



1025829

<https://www.phoenixcontact.com/us/products/1025829>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, CANopen®, DeviceNet™, 5-position, Pin, straight, M12-SPEEDCON, A-coding, on free cable end, Cable connection, cable length: 2 m, this item is expected to be lead-free from Q1 2027 in accordance with RoHS II without exception 6c (Pb < 0.1%), a lead-free alternative is possible on request in advance

Your advantages

- Preassembled with cables in various standard lengths for immediate use
- Customer-specific assemblies and cable lengths can be supplied
- Sealed on the cable side for optimum tightness of seal
- Cable designs for all common networks and fieldbuses
- For high transmission safety: shield connection to the housing with optional EMC nut

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1025829 |
| Packing unit | 1 pc |
| Minimum order quantity | 50 pc |
| Note | Made to order (non-returnable) |
| Product key | ABQDGA |
| GTIN | 4055626518220 |
| Weight per piece (including packing) | 85.2 g |
| Weight per piece (excluding packing) | 76.49 g |
| Country of origin | DE |

SACCBP-M12MS-5CON-M16/1,0-923 - Device

connector rear mounting



1025829

<https://www.phoenixcontact.com/us/products/1025829>

Technical data

Notes

| | |
|--------------------|--|
| Notes on operation | The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration. |
| Order information: | Lock nut is included in the scope of delivery |

Safety note

| | |
|-------------|--|
| Safety note | <p>WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> |
| | <ul style="list-style-type: none"> • WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible. |
| | <ul style="list-style-type: none"> • WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product. |
| | <ul style="list-style-type: none"> • The products are suitable for applications in plant, controller, and electrical device engineering. |
| | <ul style="list-style-type: none"> • When operating the connectors in outdoor applications, they must be separately protected against environmental influences. |
| | <ul style="list-style-type: none"> • Assembled products may not be manipulated or improperly opened. |
| | <ul style="list-style-type: none"> • Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). |
| | <ul style="list-style-type: none"> • When using the product in direct connection with third-party manufacturers, the user is responsible. |
| | <ul style="list-style-type: none"> • For operating voltages > 50 V AC, conductive connector housings must be grounded |
| | <ul style="list-style-type: none"> • Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards. |
| | <ul style="list-style-type: none"> • Observe the corresponding technical data. You will find information: <ul style="list-style-type: none"> o On the product o On the packing label o In the supplied documentation o Online at phoenixcontact.com/products under the product |
| | <ul style="list-style-type: none"> • Only use tools recommended by Phoenix Contact |
| | <ul style="list-style-type: none"> • Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory |

SACCBP-M12MS-5CON-M16/1,0-923 - Device connector rear mounting



1025829

<https://www.phoenixcontact.com/us/products/1025829>

| | |
|--|--|
| | <p>section of the product at phoenixcontact.com/products</p> <ul style="list-style-type: none"> • Ensure that the protective or functional ground has been properly connected. • VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector • The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12). |
|--|--|

Mounting

| | |
|-------------------|--|
| Mounting type | Rear mounting (M16 x 1.5, with flat nut) |
| Tightening torque | 2 Nm ... 3 Nm (Installation-side) |

Product properties

| | |
|---------------------|-----------------------------------|
| Product type | Circular connectors (device side) |
| Application | Data |
| Number of positions | 5 |
| Coding | A |
| Thread type | M12 |

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 3 |

Material specifications

| | |
|--|--------|
| Material Housing | GD-Zn |
| Material Housing surface | Ni |
| Flammability rating according to UL 94 | V0 |
| Seal material | FKM |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA 6.6 |

Electrical properties

| | |
|-----------------------|--|
| Rated surge voltage | 1.5 kV |
| Nominal voltage U_N | 48 V AC |
| | 60 V DC |
| Nominal current I_N | 4 A (Plug/socket in accordance with IEC 61076-2-101, cable technical data is to be observed) |
| Transmission medium | Copper |

Connection data

Conductor connection

SACCBP-M12MS-5CON-M16/1,0-923 - Device connector rear mounting



1025829

<https://www.phoenixcontact.com/us/products/1025829>

| | |
|-------------------------|-----------------------------------|
| Connection method | Cable connection |
| Contact connection type | Pin |
| Tightening torque | 2 Nm ... 3 Nm (Installation-side) |

Mechanical properties

Mechanical data

| | |
|-----------------------------|-------|
| Insertion/withdrawal cycles | > 100 |
|-----------------------------|-------|

Connector

Connection 1

| | |
|-------------------|----------|
| Head design | Pin |
| Head cable outlet | straight |
| Head thread type | M12 |
| Head locking type | SPEEDCON |
| Coding | A |


Connection 2

| | |
|-------------|----------------|
| Head design | free cable end |
|-------------|----------------|

Cable/line

| | |
|--------------|-----|
| Cable length | 2 m |
|--------------|-----|

CANopen®/DeviceNet™, PUR, gray [923]

| | |
|--------------------------------|--|
| Dimensional drawing |  |
| UL AWM Style | 21198 (80°C/300 V) |
| Number of positions | 4 |
| Shielded | yes |
| Cable type | CANopen®/DeviceNet™, PUR, gray [923] |
| Conductor structure | 2xAWG24/19+2xAWG22/19 |
| AWG signal line | 24 |
| AWG power supply | 22 |
| Conductor cross-section | 2x 0.25 mm ² (Data cable) 2x 0.34 mm ² (Power supply) 1x 0.34 mm ² (Drain wire) |
| Wire diameter incl. insulation | 1.95 mm ±0.05 mm (Data cable) 1.4 mm ±0.05 mm (Power supply) |

SACCBP-M12MS-5CON-M16/1,0-923 - Device connector rear mounting



1025829

<https://www.phoenixcontact.com/us/products/1025829>

| | |
|---|---|
| External cable diameter | 6.70 mm ±0.3 mm |
| Outer sheath, material | PUR |
| External sheath, color | silver-gray RAL 7001 |
| Conductor material | Tin-plated Cu litz wires |
| Material wire insulation | Foamed PE (Data cable) |
| | PE (Power supply) |
| Single wire, color | red-black, blue-white |
| Twisted pairs | 2 cores to the pair |
| Overall twist | 2 pairs around a drain wire in the center to the core |
| Optical shield covering | 80 % |
| Insulation resistance | ≥ 5 GΩ*km (Data cable) |
| | ≥ 5 GΩ*km (Power supply) |
| Wave impedance | 120 Ω ±10 % (with 1 MHz) |
| Nominal voltage, cable | ≤ 300 V (Peak value, not for high-power applications) |
| Test voltage Core/Core | 2000 V (50 Hz, 1 min.) |
| Test voltage Core/Shield | 2000.00 V (50 Hz, 1 min.) |
| Minimum bending radius, fixed installation | 4 x D |
| Minimum bending radius, flexible installation | 8 x D |
| Dynamic load capacity (bending) | Max. bending cycles: 5000000, Bending radius: 70 mm, Bending radius: 15 x D, Traversing path: 4.5 m, Traversing rate: 3 m/s, Acceleration: 3 m/s ² , Ambient temperature: -20 °C ... 60 °C |
| Shield attenuation | ≤ 22.9 dB/km (with 1 MHz) |
| | ≤ 16.4 dB/km (At 500 kHz) |
| | ≤ 9.5 dB/km (At 125 kHz) |
| Halogen-free | in accordance with DIN VDE 0472 part 815 |
| | according to IEC 60754-1 |
| Flame resistance | UL 1581, Section 1060 and UL 2556, Section 9.3 (FT1) |
| | UL 1581, Section 1100 and UL 2556, Section 9.1 (HFT/FT2) |
| | IEC 60332-1-2 |
| | in accordance with ISO 6722-1 5.22 (UN ECE-R 118.01) |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -30 °C ... 70 °C (Cable, flexible installation) |
| | -20 °C ... 60 °C (for installation) |
| | -20 °C ... 60 °C (cable, drag chain applications) |

Environmental and real-life conditions

Ambient conditions

| | |
|---|---|
| Degree of protection | IP67 (When plugged in) |
| | IP65 (When plugged in) |
| | IP65/IP67 |
| Ambient temperature (operation) (male connector/female connector) | -25 °C ... 85 °C (Plug / socket) |
| | -40 °C ... 85 °C (without mechanical actuation) |
| UL Type Rating | Type 4 (indoor use only) |

SACCBP-M12MS-5CON-M16/1,0-923 - Device connector rear mounting



1025829

<https://www.phoenixcontact.com/us/products/1025829>

Standards and regulations

| | |
|--------------------------|------------------------------|
| Standard designation | M12 circular connector |
| Standards/specifications | according to IEC 61076-2-101 |


SACCBP-M12MS-5CON-M16/1,0-923 - Device connector rear mounting

1025829

<https://www.phoenixcontact.com/us/products/1025829>

Drawings

Schematic diagram

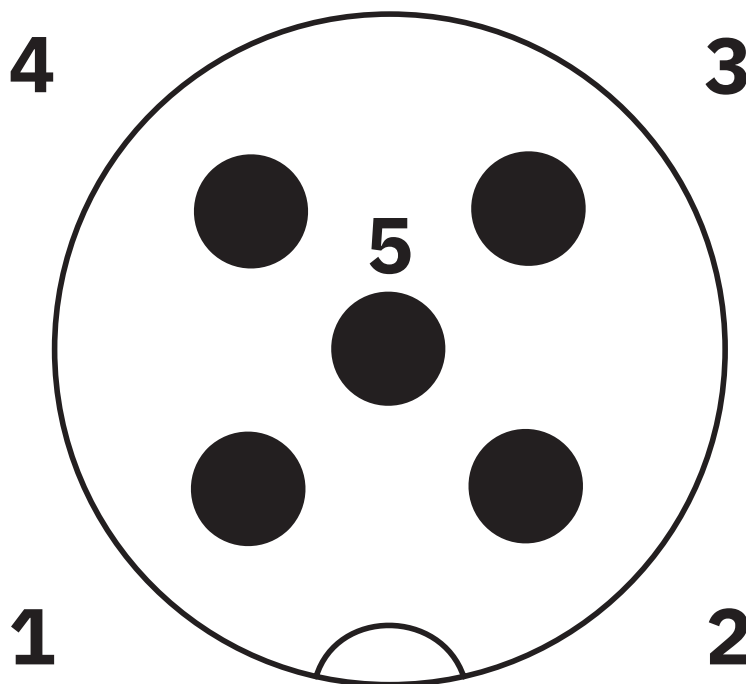

Pin assignment M12 male connector, 5-pos., A-coded, male side

SACCBP-M12MS-5CON-M16/1,0-923 - Device connector rear mounting



1025829

<https://www.phoenixcontact.com/us/products/1025829>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27440103 |
| ECLASS-15.0 | 27440103 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC003570 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

SACCBP-M12MS-5CON-M16/1,0-923 - Device connector rear mounting



1025829

<https://www.phoenixcontact.com/us/products/1025829>

Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | c656b4db-e8b3-4e1c-8393-c5669bf4f5f6 |

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com