

# PRC ED-H 1I5/3O3-4-HR-GN - H distributor



1079661

<https://www.phoenixcontact.com/us/products/1079661>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

H distributor, Range of articles: PRC 35, design: H distributor, color: black, number of positions: 5, rated voltage: 400 V, rated current: 32 A, Connection method: Preassembled, Alternatively, this item can be wired. For your specific requirements, please contact your local PHOENIX CONTACT subsidiary.



## Your advantages

- Time-saving plug-and-play installation with preassembled distributor boxes
- Locking mechanism can be unlocked manually or using a tool
- Ideal for indoor and outdoor use due to weatherproof materials
- Customer-specific versions and assembly available on request

## Commercial data

Item number	1079661
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB03
Product key	ABLCCA
GTIN	4055626800813
Weight per piece (including packing)	645.8 g
Weight per piece (excluding packing)	522.475 g
Customs tariff number	85444290
Country of origin	PL

## Technical data

### Notes

Order information:	Alternatively, this item can be wired. For your specific requirements, please contact your local PHOENIX CONTACT subsidiary.
--------------------	--

### Safety note

Safety note	<ul style="list-style-type: none"> <li>• <b>WARNING:</b> Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.</li> </ul>
	<ul style="list-style-type: none"> <li>• <b>WARNING:</b> Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.</li> </ul>
	<p><b>WARNING:</b> The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p>
	<ul style="list-style-type: none"> <li>• Assembled products may not be manipulated or improperly opened.</li> </ul>
	<ul style="list-style-type: none"> <li>• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a>).</li> </ul>
	<ul style="list-style-type: none"> <li>• When using the product in direct connection with third-party manufacturers, the user is responsible.</li> </ul>
	<ul style="list-style-type: none"> <li>• For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li> </ul>
	<ul style="list-style-type: none"> <li>• Ensure that the protective or functional ground has been properly connected.</li> </ul>
	<ul style="list-style-type: none"> <li>• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector</li> </ul>
	<ul style="list-style-type: none"> <li>• Observe the corresponding technical data. You will find information:                         <ul style="list-style-type: none"> <li>o On the product</li> <li>o On the packing label</li> <li>o In the supplied documentation</li> <li>o Online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> under the product</li> </ul> </li> </ul>
	<ul style="list-style-type: none"> <li>• Only use tools recommended by Phoenix Contact</li> </ul>
	<ul style="list-style-type: none"> <li>• The installation notes/Design In documents online on the download page at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> must be observed for this product.</li> </ul>
	<ul style="list-style-type: none"> <li>• Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a></li> </ul>
<ul style="list-style-type: none"> <li>• Operate the connector only when it is fully plugged in.</li> </ul>	
<ul style="list-style-type: none"> <li>• Operate the connector only when it is fully plugged in and interlocked.</li> </ul>	
<ul style="list-style-type: none"> <li>• Ensure that when laying the cable, the tensile load on the</li> </ul>	

	connectors does not exceed the upper limit specified in the standards.
	<ul style="list-style-type: none"> <li>• Observe the minimum bending radius of the cable. Lay the cable without twisting it.</li> </ul>
	<ul style="list-style-type: none"> <li>• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).</li> </ul>

## Product properties

Product type	Power distributor
Product family	PRC 35
Type	H distributor
Number of positions	5
Coding	AD

## Insulation characteristics

Protection class	II
Degree of pollution	2

## Dimensions

Width	238 mm
Height	129 mm
Length	77 mm

## Electrical properties

Rated voltage	400 V (III/2.00)
Rated surge voltage (III/2)	8 kV
Rated current	32 A (observe derating)

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	2000
Insertion force	70 N ±10 N

## Material specifications

Color (Housing)	black (RAL 9005)
Color of the housing part	black
Material Housing	Polycarbonate
Material Contact carrier	PPE (Contact carrier)
Material Contact	CuZn (Contact material, Pb < 0.1)
Flammability rating according to UL 94	V0
Seal material	TPE
Contact surface material	Sn
O-ring material	Silicon
Material of locking screw	Polycarbonate, fiber-reinforced

# PRC ED-H 1I5/3O3-4-HR-GN - H distributor



1079661

<https://www.phoenixcontact.com/us/products/1079661>

Material for screw connection	PPE
-------------------------------	-----

## Cable/line

Halogen-free	yes
--------------	-----


## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP66/IP67/IP69
Ambient temperature (operation)	-40 °C ... 70 °C (Depending on the current carrying capacity/derating curve)
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 85 °C

Drawings

Diagram

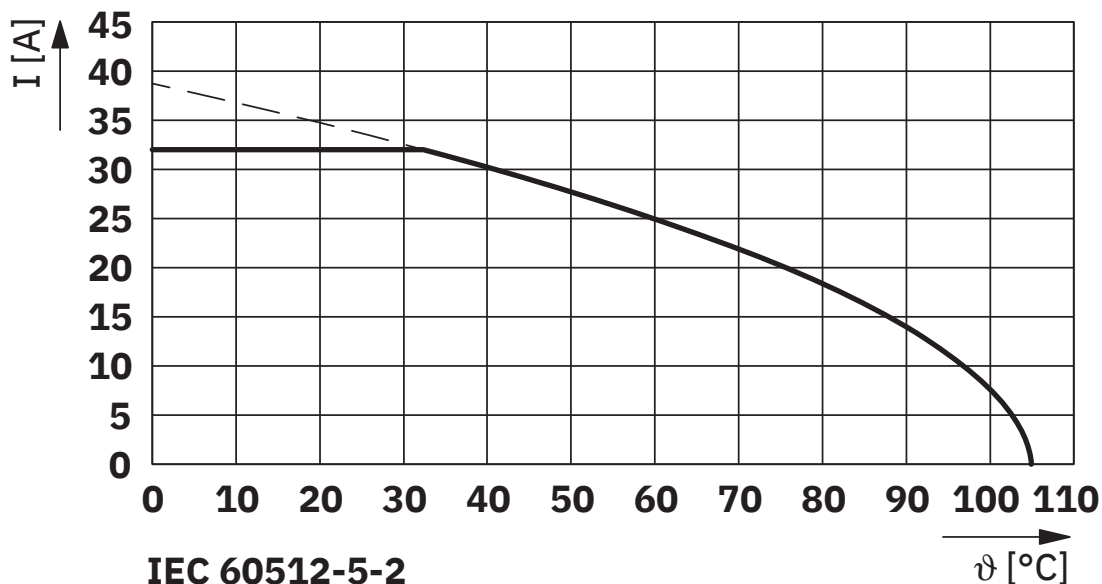


IEC 60512-5-2

PRC ED-\* 1I3... / 2 conductors / factor 0.8

PRC ED-\* 1I5... / 4 conductors / factor 1

Derating

Circuit diagram

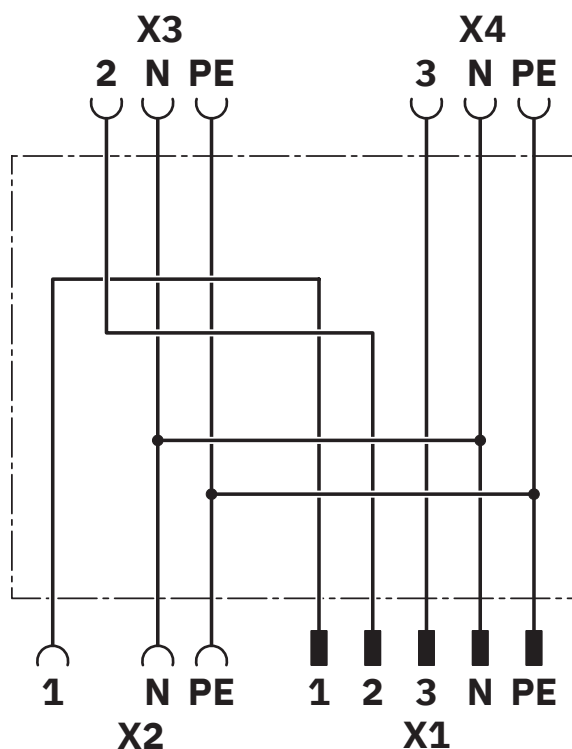

1079661

<https://www.phoenixcontact.com/us/products/1079661>

## Classifications

### ECLASS

ECLASS-13.0	27440603
ECLASS-15.0	27440603

### ETIM

ETIM 10.0	EC002567
-----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

1079661

<https://www.phoenixcontact.com/us/products/1079661>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	Triphenyl phosphate(CAS: 115-86-6)
SCIP	fc662003-c271-46ba-b286-f32d4f75c06c

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)