

# AXL SE IOL4 - Communication module



1088132

<https://www.phoenixcontact.com/us/products/1088132>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Axioline Smart Elements, IO-Link master, IO-Link ports Class A: 4, connection method: Push-in connection, connection technology: 3-conductor, degree of protection: IP20

## Product description

You can integrate Axioline Smart Elements into systems with the Smart Element interface. The IO-Link master enables the operation of up to four IO-Link devices. Alternatively, you can connect a standard digital sensor or actuator to each port.

## Your advantages

- Connection of 4 IO-Link devices
- Alternatively: connection of one digital sensor or actuator per port
- Connection of IO-Link devices in 3-conductor technology
- Connection of sensors in 3-conductor technology
- Connection of actuators in 2- and 3-conductor technology
- Parameter data storage on the master
- IO-Link specification V1.1.2
- Substitute value behavior of inputs and outputs can be parameterized for each port
- IOL-CONF supported
- Device rating plate stored

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1088132       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | DR05          |
| Product key                          | DRIB53        |
| GTIN                                 | 4055626887470 |
| Weight per piece (including packing) | 40 g          |
| Weight per piece (excluding packing) | 37 g          |
| Customs tariff number                | 85389091      |
| Country of origin                    | DE            |

## Technical data

### Dimensions

|                     |  |
|---------------------|--|
| Dimensional drawing |  |
| Width               | 14.9 mm  |
| Height              | 62.2 mm  |
| Depth               | 62 mm  |

### Notes

#### Note on application

|                     |                         |
|---------------------|-------------------------|
| Note on application | Only for industrial use |
|---------------------|-------------------------|

### Interfaces

#### Smart Element interface

|                                   |  |
|-----------------------------------|--|
| Number of interfaces              | 1  |
| Connection method                 | Card edge connector                            |
| Transmission speed                | See system in which you use the Smart Element. |
| Start time until ready to operate | < 500 ms                                       |

### System properties

#### Module

|                      |         |
|----------------------|---------|
| ID code (hex)        | none    |
| Process data channel | 512 bit |
| Input address area   | 64 Byte |
| Output address area  | 64 Byte |

### Input data

#### Digital

|                                |  |
|--------------------------------|--|
| Description of the input       | IO-Link ports in digital input (DI) mode |
| Number of inputs               | max. 4 (IEC 61131-2 type 1)              |
| Connection method              | Push-in connection                       |
| Connection technology          | 3-conductor                              |
| Nominal input voltage $U_{IN}$ | 24 V DC                                  |
| Input voltage range "0" signal | -0.3 V DC ... 5 V DC                     |
| Input voltage range "1" signal | 11 V DC ... 30 V DC                      |
| Nominal input current          | typ. 2.5 mA                              |

# AXL SE IOL4 - Communication module



1088132

<https://www.phoenixcontact.com/us/products/1088132>

|                            |                          |
|----------------------------|--------------------------|
| Sensor current per channel | max. 500 mA (from L+/L-) |
| Input filter time          | 1 $\mu$ s                |

## IO-Link

|                       |                    |
|-----------------------|--------------------|
| Number of ports       | 4                  |
| Connection method     | Push-in connection |
| Connection technology | 3-conductor        |
| Port type             | Class A            |

## Output data

### Digital

|                             |   |
|-----------------------------|---|
| Output description          | IO-Link ports in digital output (DO) mode |
| Connection method           | Push-in connection                        |
| Connection technology       | 2-, 3-conductor                           |
| Number of outputs           | max. 4                                    |
| Nominal output voltage      | 24 V DC                                   |
| Nominal current per channel | 200 mA                                    |

## Product properties

|                   |  |
|-------------------|--|
| Product type      | I/O component                                      |
| Product family    | Axioline Smart Elements                            |
| Type              | modular  |
| Mounting position | See the system in which the Smart Element is used. |

### Insulation characteristics

|                      |                              |
|----------------------|------------------------------|
| Overvoltage category | II (IEC 60664-1, EN 60664-1) |
| Pollution degree     | 2 (IEC 60664-1, EN 60664-1)  |

## Electrical properties

|   |        |
|---|--------|
| Maximum power dissipation for nominal condition | 1.85 W |
|---|--------|

### Supply: IO-Link

|  |  |
|--|--|
| Nominal voltage for I/O supply         | 24 V DC  |
| Supply voltage range                   | 18 V DC ... 30 V DC (including all tolerances, including ripple)   |
| Nominal current for every IO-Link port | 500 mA (at L+/L-)<br>200 mA (at C/Q)   |
| Protective circuit                     | Overload protection for L+; electronically limited to 0.6 A<br>Short-circuit protection for L+; by switching off after 55 ms |

### Potentials: Communications power supply of the Smart Elements ( $U_{SE}$ )

|                |                            |
|----------------|----------------------------|
| Supply voltage | using card edge connectors |
|----------------|----------------------------|

### Potentials: I/O supply ( $U_P$ ) incl. IO-Link port supply

|                      |  |
|----------------------|--|
| Supply voltage       | 24 V DC (using card edge connectors)                               |
| Supply voltage range | 19.2 V DC ... 30 V DC (including all tolerances, including ripple) |

|                     |   |
|---------------------|---|
| Current draw        | max. 2030 mA (Internal current consumption + full load of the 4 IO-Link ports (4 x 500 mA)) |
|                     | typ. 2020 mA  |
| Current consumption | min. 18 mA (without connected peripherals)  |
| Protective circuit  | Surge protection; See the system in which the Smart Element is used.                        |
|                     | Reverse polarity protection; Polarity protection diode                                      |

#### Electrical isolation/isolation of the voltage ranges

|   |                        |
|---|------------------------|
| Test voltage: Communications supply / 24 V supply (I/O) | 500 V AC, 50 Hz, 1 min |
| Test voltage: Communications supply / functional ground | 500 V AC, 50 Hz, 1 min |
| Test voltage: 24 V supply (I/O) / functional ground     | 500 V AC, 50 Hz, 1 min |

## Connection data

#### Connection technology

|                               |   |
|-------------------------------|---|
| Connection name               | I/O   |
| Note on the connection method | Please observe the information provided on conductor cross-sections in the "AxioLine Smart Elements" user manual. |

#### I/O

|   |   |
|---|---|
| Connection method   | Push-in connection  |
| Note on the connection method   | Please observe the information provided on conductor cross-sections in the "AxioLine Smart Elements" user manual. |
| Conductor cross-section, rigid  | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| Conductor cross-section, flexible                                       | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| Conductor cross-section AWG   | 24 ... 16   |
| Conductor cross-section, flexible, with ferrule, with plastic sleeve    | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| Conductor cross-section, flexible, with ferrule, without plastic sleeve | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
|   | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| Conductor cross-section, flexible, with ferrule, with plastic sleeve    | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| Stripping length  | 8 mm  |

## Environmental and real-life conditions

#### Ambient conditions

|  |   |
|--|---|
| Ambient temperature (operation)          | -25 °C ... 60 °C                                  |
| Degree of protection                     | IP20  |
| Air pressure (operation)                 | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Air pressure (storage/transport)         | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Ambient temperature (storage/transport)  | -40 °C ... 85 °C                                  |
| Permissible humidity (operation)         | 5 % ... 95 % (non-condensing)                     |
| Permissible humidity (storage/transport) | 5 % ... 95 % (non-condensing)                     |

## Standards and regulations

|                  |                                       |
|------------------|---------------------------------------|
| Protection class | III (IEC 61140, EN 61140, VDE 0140-1) |
|------------------|---------------------------------------|

## Mounting

# AXL SE IOL4 - Communication module



1088132

<https://www.phoenixcontact.com/us/products/1088132>

|                   |  |
|-------------------|--|
| Mounting type     | Plug-in mounting (Smart Element slot)              |
| Mounting position | See the system in which the Smart Element is used. |

# AXL SE IOL4 - Communication module


1088132

<https://www.phoenixcontact.com/us/products/1088132>



## Drawings

Dimensional drawing

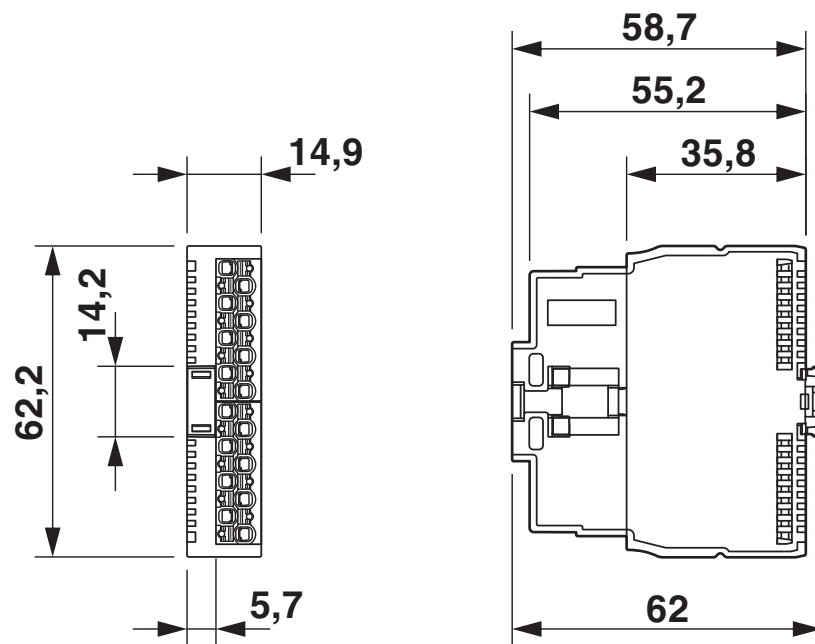

## Dimensions


# AXL SE IOL4 - Communication module

1088132

<https://www.phoenixcontact.com/us/products/1088132>



Connection diagram

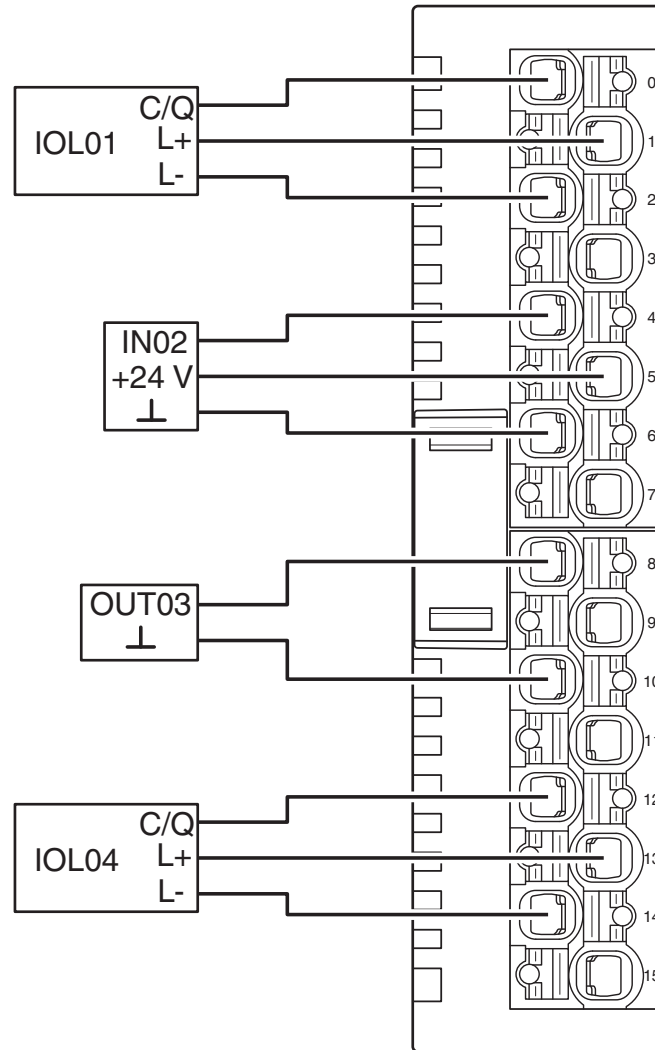


Connection example

# AXL SE IOL4 - Communication module

1088132

<https://www.phoenixcontact.com/us/products/1088132>

Block diagram

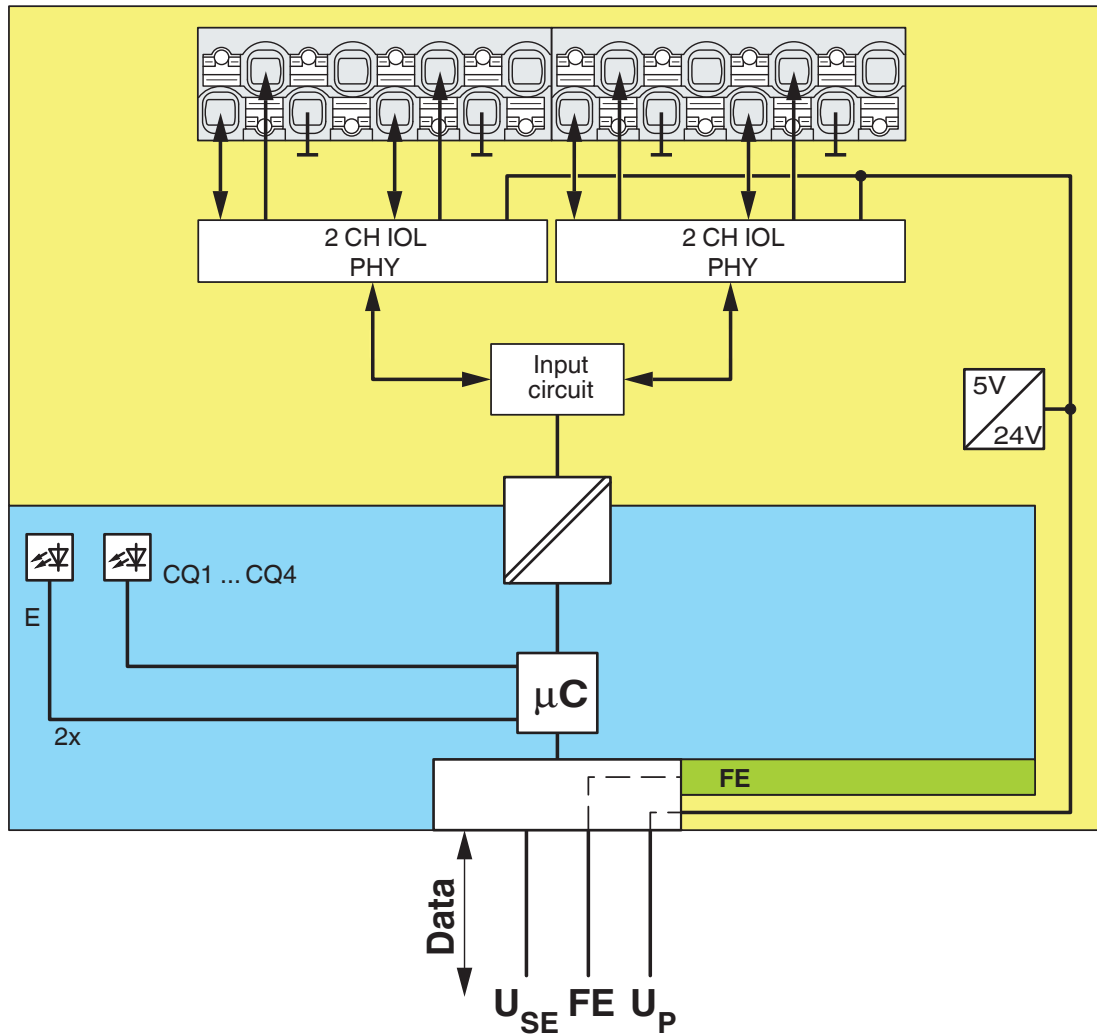

Internal wiring of the terminal points

# AXL SE IOL4 - Communication module



1088132

<https://www.phoenixcontact.com/us/products/1088132>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1088132>



**cULus Listed**

Approval ID: E238705



**cULus Listed**

Approval ID: E238705

# AXL SE IOL4 - Communication module



1088132

<https://www.phoenixcontact.com/us/products/1088132>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27242608 |
| ECLASS-15.0 | 27242608 |

### ETIM

|           |          |
|-----------|----------|
| ETIM 10.0 | EC001604 |
|-----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 32151600 |
|-------------|----------|

1088132

<https://www.phoenixcontact.com/us/products/1088132>

## Environmental product compliance

### EU RoHS

|   |              |
|---|--------------|
| Fulfills EU RoHS substance requirements | Yes          |
| Exemption                               | 7(a), 7(c)-I |

### China RoHS

|  |   |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50   |
|  | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | 1c4625cc-d29e-4bde-923d-a438bb2d8b3d |

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)