

FLKM 20-PA-ET200SP - Front adapter



1099751

<https://www.phoenixcontact.com/us/products/1099751>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



VARIOFACE front adapter for Siemens SIMATIC® ET200SP, with a 20-pos. FLK-/IDC male strip, max. 16 channels can be connected

Commercial data

Item number	1099751
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C421
Product key	DK231S
GTIN	4055626950181
Weight per piece (including packing)	28 g
Weight per piece (excluding packing)	30 g
Customs tariff number	85366990
Country of origin	DE

1099751

<https://www.phoenixcontact.com/us/products/1099751>

Technical data

Product properties

Product type	Front adapter
Product family	VARIOFACE

Insulation characteristics: Air clearances and creepage distances

Insulation	Functional insulation
Overvoltage category	II
Pollution degree	2

Electrical properties

Operating voltage (DC)	≤ 60 V DC
Nominal operating mode	100% operating factor
Current (per branch)	≤ 1 A
Current (Voltage supply via IDC/FLK)	≤ 2 A
Current (Voltage supply via Push-in connection)	≤ 8 A

Air clearances and creepage distances

Rated insulation voltage	63 V
Rated surge voltage	0.6 kV (1.2/50 μs)

Supported controller: SIEMENS ET 200SP

Suitable base unit	6ES7193-6BP00-0BA0
	6ES7193-6BP00-2BA0
	6ES7193-6BP00-0BA1
	6ES7193-6BP00-0DA0
	6ES7193-6BP00-2DA0
	6ES7193-6BP00-0DA1
Suitable I/O module	6ES7131-6BH01-0BA0 (Base Units A0/A1)
	6ES7131-6BH01-2BA0 (Base Units A0/A1)
	6ES7132-6BH00-0AA0 (Base Units A0/A1)
	6ES7132-6BH01-0BA0 (Base Units A0/A1)
	6ES7132-6BH01-2BA0 (Base Units A0/A1)
	6ES7134-6GD01-0BA1 (Base Units A0/A1)
	6ES7134-6GD01-2BA1 (Base Units A0/A1)
	6ES7134-6HD01-0BA1 (Base Units A0/A1)
	6ES7134-6HD01-2BA1 (Base Units A0/A1)
	6ES7134-6TD00-0CA1 (Base Units A0/A1)
	6ES7134-6JD00-0CA1 (Base Units A0/A1)
	6ES7134-6JD00-2CA1 (Base Units A0/A1)
	6ES7134-6FF00-0AA1 (Base Units A0/A1)
	6ES7134-6GF00-0AA1 (Base Units A0/A1)
	6ES7134-6JF00-0CA1 (Base Units A0/A1)
	6ES7134-6JF00-2CA1 (Base Units A0/A1)

FLKM 20-PA-ET200SP - Front adapter



1099751

<https://www.phoenixcontact.com/us/products/1099751>

	6ES7134-6FB00-0BA1 (Base Units A0/A1)
	6ES7134-6GB00-0BA1 (Base Units A0/A1)
	6ES7134-6HB00-0CA1 (Base Units A0/A1)
	6ES7134-6HB00-0DA1 (Base Units A0/A1)
	6ES7135-6FB00-0BA1 (Base Units A0/A1)
	6ES7135-6GB00-0BA1 (Base Units A0/A1)
	6ES7135-6HB00-0CA1 (Base Units A0/A1)
	6ES7135-6HB00-0DA1 (Base Units A0/A1)
	6ES7135-6HD00-0BA1 (Base Units A0/A1)

Connection data

Connection 1 (control level)

Connection method	Plug-in connection
Number of connections	1
Number of positions	18

Connection 2 (field level)

Connection in acc. with standard	IEC 60603-13
Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	20
Insertion/withdrawal cycles	> 50
Pitch	2.54 mm

Connection 3 (supply)

Connection method	Push-in spring connection
Stripping length	9 mm
Number of connections	1
Number of positions	2
Conductor cross-section rigid	0.14 mm ² ... 1.5 mm ²
Conductor cross-section flexible	0.14 mm ² ... 1.5 mm ² 0.25 mm ² ... 1.5 mm ² (Ferrule without plastic sleeve) 0.25 mm ² ... 0.75 mm ² (Ferrule with plastic sleeve)
Conductor cross-section AWG	26 ... 16
Pitch	3.81 mm

Dimensions

Item dimensions

Width	14.9 mm
Height	52.95 mm
Depth	48.99 mm

Environmental and real-life conditions

Ambient conditions

FLKM 20-PA-ET200SP - Front adapter



1099751

<https://www.phoenixcontact.com/us/products/1099751>

Degree of protection (Module)	IP00
Degree of protection (Installation location)	≥ IP54
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Altitude	≤ 2000 m

Approvals

UL, USA/Canada

Identification	UL 508 Recognized
----------------	-------------------

Standards and regulations

Air clearances and creepage distances

Standards/regulations	EN IEC 60664-1
-----------------------	----------------

Mounting

Mounting type	Plug-in mounting
Mounting position	any

Notes

Notes on operation	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.
Assembly note	Once plugged in, the front adapter and terminal block form a single unit that can no longer be separated.


FLKM 20-PA-ET200SP - Front adapter

1099751

<https://www.phoenixcontact.com/us/products/1099751>

Drawings

Circuit diagram

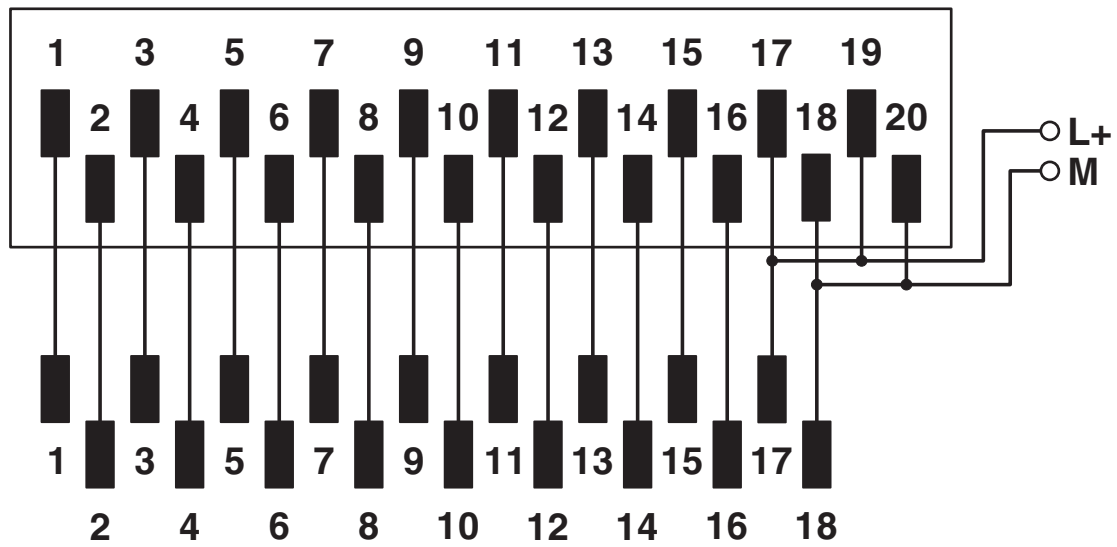

Connection scheme: FLKM 20-PA-ET200SP

FLKM 20-PA-ET200SP - Front adapter



1099751

<https://www.phoenixcontact.com/us/products/1099751>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1099751>



UL Listed

Approval ID: E238705



cUL Listed

Approval ID: E238705

FLKM 20-PA-ET200SP - Front adapter



1099751

<https://www.phoenixcontact.com/us/products/1099751>

Classifications

ECLASS

ECLASS-13.0	27242292
ECLASS-15.0	27242292

ETIM

ETIM 10.0	EC002584
-----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

FLKM 20-PA-ET200SP - Front adapter



1099751

<https://www.phoenixcontact.com/us/products/1099751>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com