

AXL SE DO16/1 NPN - Digital module



1105560

<https://www.phoenixcontact.com/us/products/1105560>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Axioline Smart Elements, Digital output module, Digital outputs: 16 (NPN), 24 V DC, 500 mA, connection technology: 1-conductor, degree of protection: IP20

Product description

You can integrate Axioline Smart Elements into systems with the Smart Element interface. This Smart Element emits digital signals.

Your advantages

- 16 digital outputs, NPN-wired
- 24 V DC, 500 mA
- Connection of actuators in 1-conductor technology
- Substitute value behavior of the outputs can be parameterized for the Smart Element
- Device rating plate stored

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1105560 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | DR05 |
| Product key | DRIB32 |
| GTIN | 4055626987323 |
| Weight per piece (including packing) | 37.88 g |
| Weight per piece (excluding packing) | 35 g |
| Customs tariff number | 85389091 |
| Country of origin | DE |

AXL SE DO16/1 NPN - Digital module



1105560

<https://www.phoenixcontact.com/us/products/1105560>

Technical data

Dimensions

| | |
|---------------------|------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width | 14.9 mm |
| Height | 62.2 mm |
| Depth | 62 mm |

Notes

Note on application

| | |
|---------------------|-------------------------|
| Note on application | Only for industrial use |
|---------------------|-------------------------|

Material specifications

| | |
|-----------------|-----------------|
| Color (Housing) | gray (RAL 7042) |
|-----------------|-----------------|

Interfaces

Smart Element interface

| | |
|-----------------------------------|------------------------------------------------|
| Number of interfaces | 1 |
| Connection method | Card edge connector |
| Transmission speed | See system in which you use the Smart Element. |
| Start time until ready to operate | < 500 ms |

System properties

Programming data (LocalbusSlave)

| | |
|----------------------|--------|
| Process data channel | 16 bit |
| Input address area | 0 Byte |
| Output address area | 2 Byte |

Fieldbus data telegram (PROFIBUS)

| | |
|-----------------------------|--------|
| Required parameter data | 9 Byte |
| Required configuration data | 6 Byte |

Output data

Digital:

| | |
|-------------------|--------------------|
| Output name | Digital outputs |
| Connection method | Push-in connection |

AXL SE DO16/1 NPN - Digital module



1105560

<https://www.phoenixcontact.com/us/products/1105560>

| | |
|-----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connection technology | 1-conductor |
| Number of outputs | 16 (NPN) |
| Protective circuit | Short-circuit and overload protection; electronic |
| Output voltage | 24 V |
| Limitation of the voltage induced on circuit interruption | 30 V DC ... 55 V DC |
| Max. current carrying capacity per output | max. 500 mA |
| Maximum output current per module | max. 6 A (Also make sure that the maximum permissible current of 6 A is not exceeded!) |
| Nominal output voltage | 24 V DC |
| Load min. | 10 kΩ |
| Output voltage when switched off | min. 23 V (At $U_P = 24$ V DC) |
| Output current when switched off | max. 100 μA |
| Nominal load, inductive | 12 VA (1.2 H, 48 Ω, with nominal voltage) |
| Nominal load, lamp | 12 W (at nominal voltage) |
| Nominal load, ohmic | 12 W (48 Ω, with nominal voltage) |
| Switching frequency | max. 1200 per second (With resistive load, at least 50 mA load current) max. 1 per second (with inductive load) max. 16 per second (with nominal lamp load) |
| Reverse voltage resistance to short pulses | limited protection up to 0.5 A for 1 s |
| Behavior with overload | Shutdown with automatic restart |
| Behavior with inductive overload | Output can be destroyed |
| Signal delay | max. 100 μs (when switched on) max. 100 μs (when switched off, with at least 50 mA load current) |
| Overcurrent shut-down | min. 0.7 A |

Product properties

| | |
|-------------------|----------------------------------------------------|
| Product type | I/O component |
| Product family | Axioline Smart Elements |
| Type | modular |
| Mounting position | See the system in which the Smart Element is used. |

Insulation characteristics

| | |
|----------------------|------------------------------|
| Overvoltage category | II (IEC 60664-1, EN 60664-1) |
| Pollution degree | 2 (IEC 60664-1, EN 60664-1) |

Electrical properties

| | |
|-------------------------------------------------|--------|
| Maximum power dissipation for nominal condition | 1.85 W |
|-------------------------------------------------|--------|

Potentials: Communications power supply of the Smart Elements (U_{SE})

| | |
|----------------|----------------------------|
| Supply voltage | using card edge connectors |
|----------------|----------------------------|

Potentials: I/O supply (U_P)

| | |
|----------------------|--------------------------------------------------------------------|
| Supply voltage | 24 V DC (using card edge connectors) |
| Supply voltage range | 19.2 V DC ... 30 V DC (including all tolerances, including ripple) |
| Current draw | max. 6 A |

AXL SE DO16/1 NPN - Digital module



1105560

<https://www.phoenixcontact.com/us/products/1105560>

| | |
|---------------------|----------------------------------------------------------------------|
| Current consumption | min. 14 mA (without connected peripherals) |
| Protective circuit | Surge protection; See the system in which the Smart Element is used. |
| | Reverse polarity protection; parallel diode |
| Protection | See the system in which the Smart Element is used. |

Electrical isolation/isolation of the voltage ranges

| | |
|---------------------------------------------------------|------------------------|
| Test voltage: Communications supply / 24 V supply (I/O) | 500 V AC, 50 Hz, 1 min |
| Test voltage: Communications supply / functional ground | 500 V AC, 50 Hz, 1 min |
| Test voltage: 24 V supply (I/O) / functional ground | 500 V AC, 50 Hz, 1 min |

Connection data

Connection technology

| | |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Connection name | I/O |
| Note on the connection method | Please observe the information provided on conductor cross-sections in the "AxioLine Smart Elements" user manual. |
| | With a small conductor cross-section and high current, the terminal point temperature can reach up to 31 K above the ambient temperature. |
| | When selecting the cables, observe the permissible operating temperature in accordance with IEC or UL. |

I/O

| | |
|-------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Connection method | Push-in connection |
| Note on the connection method | Please observe the information provided on conductor cross-sections in the "AxioLine Smart Elements" user manual. |
| | With a small conductor cross-section and high current, the terminal point temperature can reach up to 31 K above the ambient temperature. |
| | When selecting the cables, observe the permissible operating temperature in accordance with IEC or UL. |
| Conductor cross-section, rigid | 0.25 mm ² ... 1.5 mm ² |
| Conductor cross-section, flexible | 0.25 mm ² ... 1.5 mm ² |
| Conductor cross-section AWG | 24 ... 16 |
| Conductor cross-section, flexible, with ferrule, with plastic sleeve | 0.25 mm ² ... 1.5 mm ² |
| Conductor cross-section, flexible, with ferrule, without plastic sleeve | 0.25 mm ² ... 1.5 mm ² |
| | 0.25 mm ² ... 1.5 mm ² |
| Conductor cross-section, flexible, with ferrule, with plastic sleeve | 0.25 mm ² ... 1.5 mm ² |
| Stripping length | 8 mm |

Environmental and real-life conditions

Ambient conditions

| | |
|-----------------------------------------|---------------------------------------------------|
| Ambient temperature (operation) | -25 °C ... 60 °C |
| Degree of protection | IP20 |
| Air pressure (operation) | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Air pressure (storage/transport) | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |

AXL SE DO16/1 NPN - Digital module



1105560

<https://www.phoenixcontact.com/us/products/1105560>

| | |
|------------------------------------------|-------------------------------|
| Permissible humidity (operation) | 5 % ... 95 % (non-condensing) |
| Permissible humidity (storage/transport) | 5 % ... 95 % (non-condensing) |

Mechanical test

| | |
|--------------------------------------------------------------------|-----|
| Vibration resistance in accordance with EN 60068-2-6/IEC 60068-2-6 | 5g |
| Shock in accordance with EN 60068-2-27/IEC 60068-2-27 | 30g |
| Continuous shock in accordance with EN 60068-2-27/IEC 60068-2-27 | 10g |

Standards and regulations

| | |
|------------------|---------------------------------------|
| Protection class | III (IEC 61140, EN 61140, VDE 0140-1) |
|------------------|---------------------------------------|

Mounting

| | |
|-------------------|----------------------------------------------------|
| Mounting type | Plug-in mounting (Smart Element slot) |
| Mounting position | See the system in which the Smart Element is used. |

AXL SE DO16/1 NPN - Digital module


1105560

<https://www.phoenixcontact.com/us/products/1105560>



Drawings

Dimensional drawing

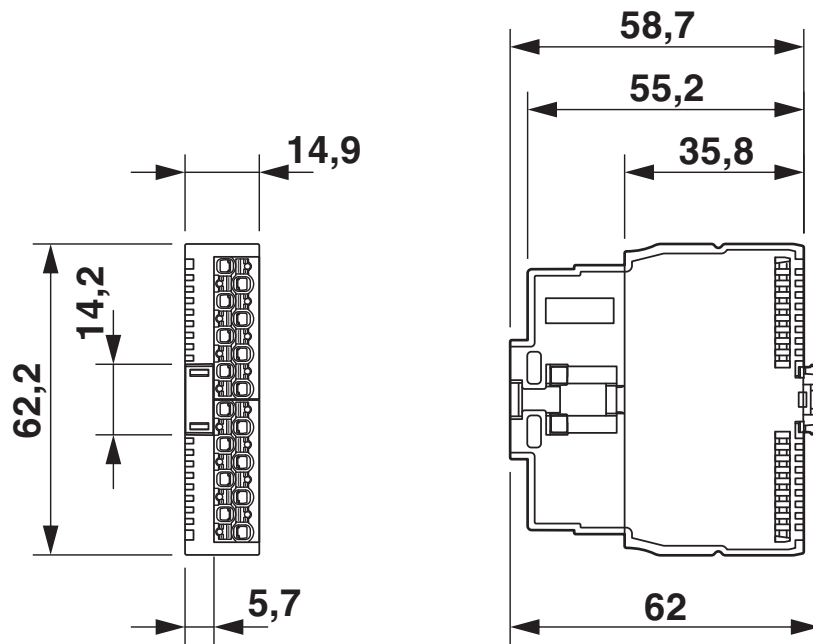


Dimensions

AXL SE DO16/1 NPN - Digital module

1105560

<https://www.phoenixcontact.com/us/products/1105560>

Connection diagram

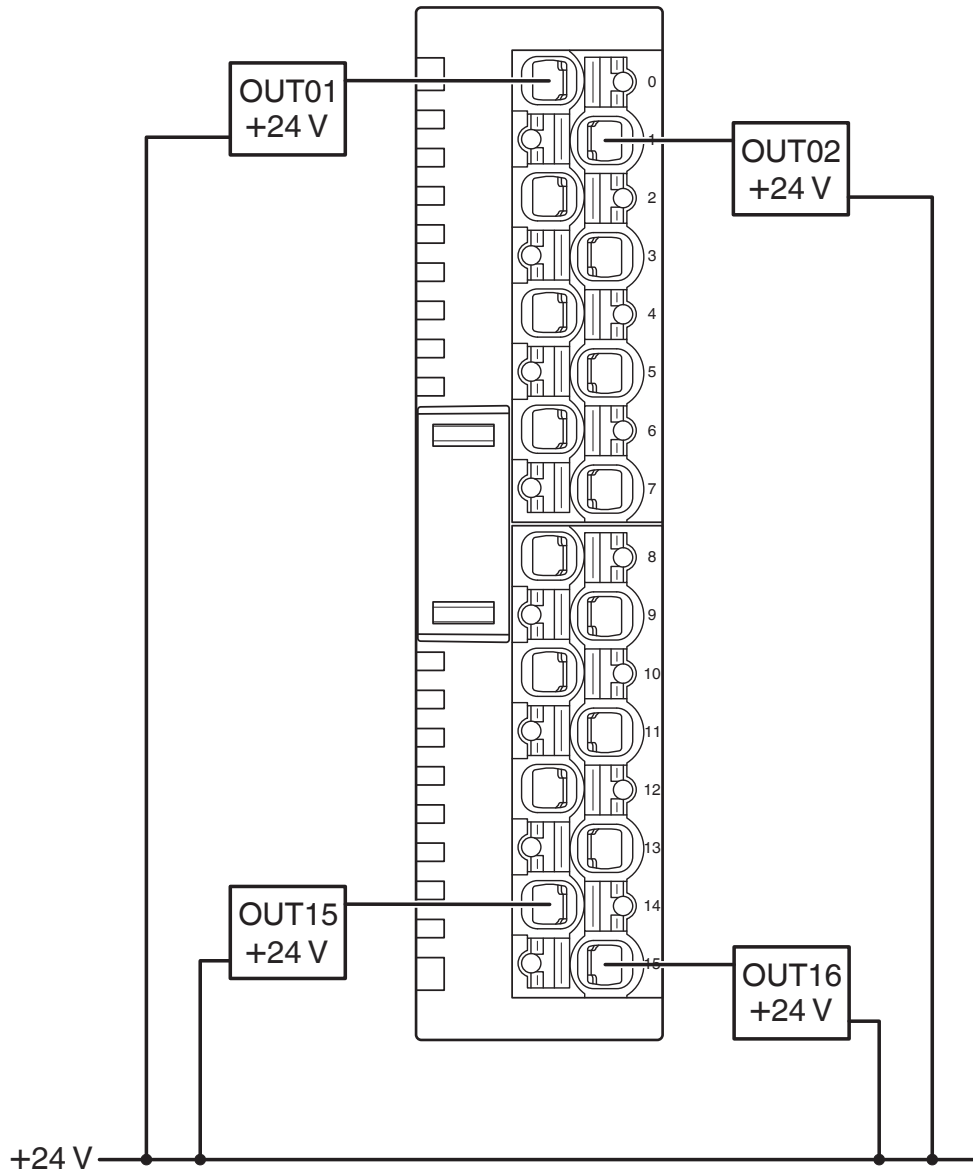

Connection in 1-conductor technology


AXL SE DO16/1 NPN - Digital module

1105560

<https://www.phoenixcontact.com/us/products/1105560>



Connection diagram

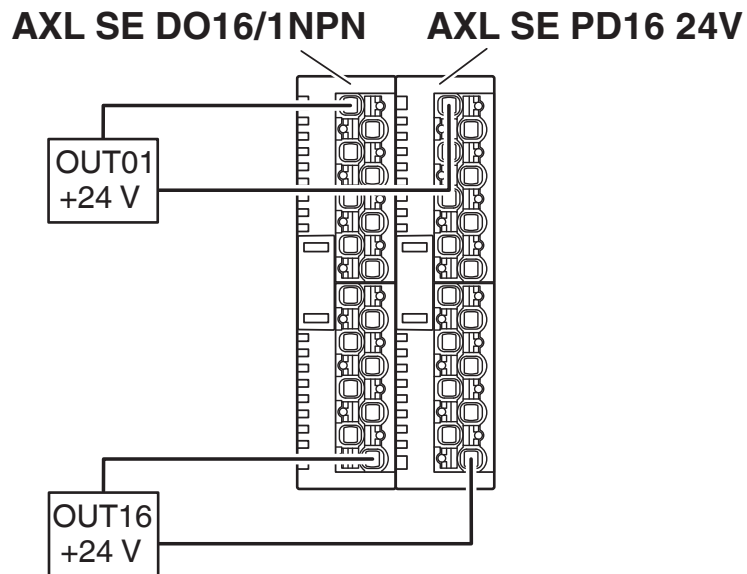


Connection in 2-conductor technology when using AXL SE PD ... (see data sheet)

1105560

<https://www.phoenixcontact.com/us/products/1105560>

Block diagram

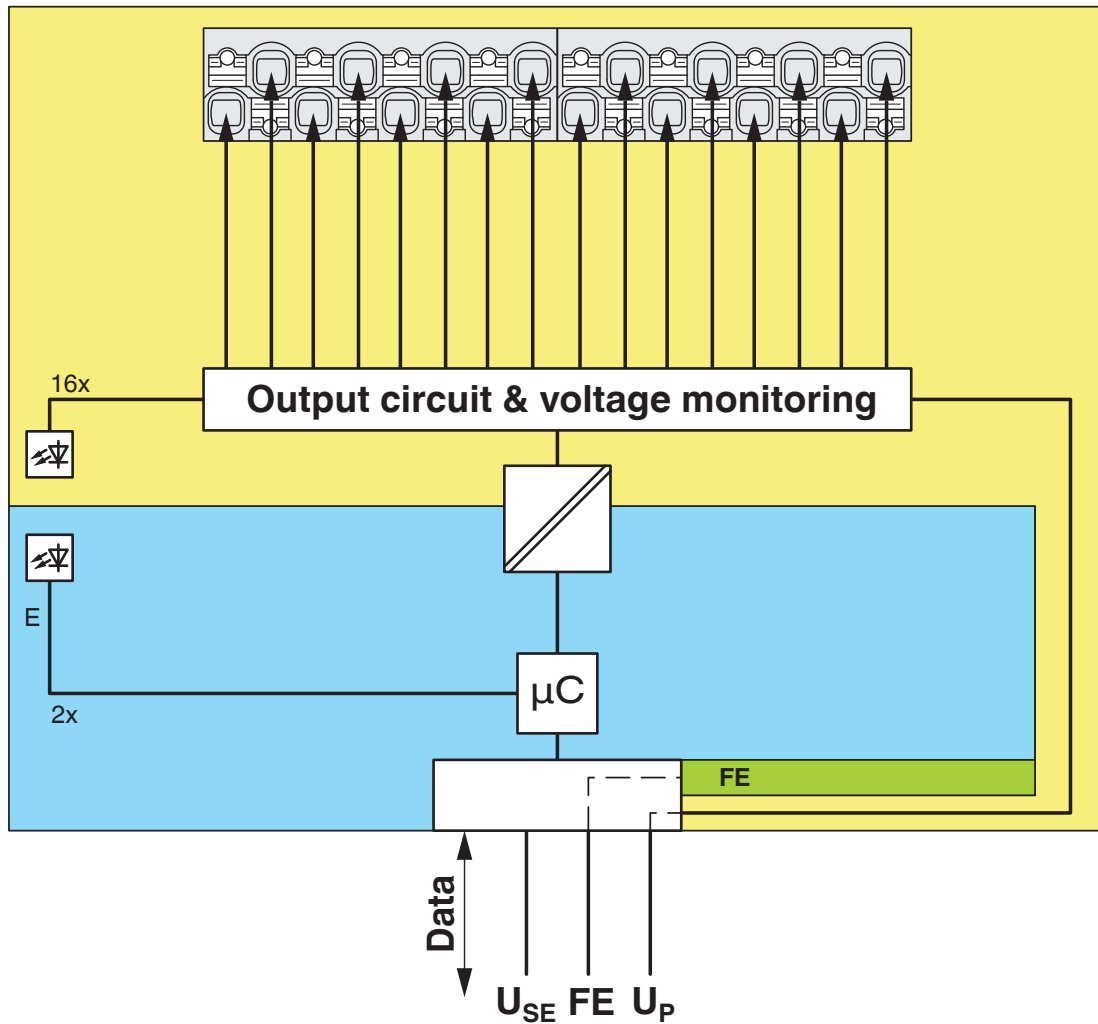

Internal wiring of the terminal points

AXL SE DO16/1 NPN - Digital module



1105560

<https://www.phoenixcontact.com/us/products/1105560>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1105560>



cULus Listed

Approval ID: E238705

AXL SE DO16/1 NPN - Digital module



1105560

<https://www.phoenixcontact.com/us/products/1105560>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27242604 |
| ECLASS-15.0 | 27242604 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC001599 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 32151600 |
|-------------|----------|

1105560

<https://www.phoenixcontact.com/us/products/1105560>

Environmental product compliance

EU RoHS

| | |
|-----------------------------------------|--------------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 7(a), 7(c)-I |

China RoHS

| | |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | c57b3279-ecca-4e8e-baaf-7d37873f3530 |

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com