

# HC-M-01-AT-M-40-PE - Contact insert module



1417382

<https://www.phoenixcontact.com/us/products/1417382>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert module, number of positions: PE, power contacts: 0, control contacts: 0, Pin, Axial screw connection, 25 mm<sup>2</sup> ... 70 mm<sup>2</sup>, application: PE transmission

## Commercial data

Item number	1417382
Packing unit	2 pc
Minimum order quantity	2 pc
Sales key	BF62
Product key	AF7ACE
GTIN	4055626112633
Weight per piece (including packing)	94.55 g
Weight per piece (excluding packing)	92.55 g
Customs tariff number	85366990
Country of origin	PL

## Technical data

### Mounting

Assembly note	<p>To ensure correct use, installation in housing with IP54 protection or better is required</p> <hr/> <p><b>Note regarding axial connection technology:</b></p> <p>For flexible wires only. The specified conductor cross-sections refer to the geometric cross-section of the cable used. Use of cables with a geometric cross-section that differs greatly from the nominal cross-section of the cable should be checked before use.</p> <p>The wiring space for axial screw technology is designed for fine strand cables according to VDE 0295 Class 5. Deviating cable structures (e.g., Class 6 cables) should be checked before use.</p> <p><b>Assembly note</b></p> <p>Before assembly, ensure that the tapered screw is turned back all the way (chamber is open). Twisting the cables is not permitted. The wires must be inserted as far as they will go into the contact chamber (until the insulation touches the contact). Hold the wires in position and use the socket wrench to tighten. The used wire end should be cut off before connecting again. The connection screw may only be retightened once to prevent the litz wires from breaking. To prevent damage to the contact, the wire/cable must be mechanically supported at an appropriate distance from the connection point (e.g., when used in a sheet metal cut-out). DIN VDE 0100-520:2003-06 provides information on the correct way to do this. Unused connections must be tightened with maximum torque. Shrink the shrink sleeve over the connection point and the conductor. Temperature &gt; 80°C.</p>
Hexagonal socket	SW 5

### Product properties

Product type	Modular contact insert
Series	HC-M-HS
Application	PE transmission
Number of positions	1
Connection profile	PE
Number of module slots	2
No. of power contacts	0
No. of control contacts	0

### Connection data

Connection technology	
Connection technology	Axial screw connection
Conductor connection	
Conductor cross-section	25 mm <sup>2</sup> ... 70 mm <sup>2</sup> (The cross section specification refers to the geometric cross section of the cable used)
Connection cross section AWG	10 ... 00

# HC-M-01-AT-M-40-PE - Contact insert module




1417382

<https://www.phoenixcontact.com/us/products/1417382>

Tightening torque	0.5 Nm ... 1 Nm (Attaching the PE plate)
	8 Nm (25 mm <sup>2</sup> ... 35 mm <sup>2</sup> )
	9 Nm (50 mm <sup>2</sup> )
	10 Nm (70 mm <sup>2</sup> )
Stripping length of the individual wire	15 mm (with an outside conductor diameter up to 12 mm)
	19 mm (with an outside conductor diameter up to 16 mm)

## Dimensions

Dimensional drawing	
Width	34.4 mm
Height	54.6 mm
Length	29.3 mm

## Mechanical characteristics

Minimum housing height	72 mm
Contact diameter	9.5 mm

## Electrical properties

SCCR	5 kA (UL 2237)
------	----------------

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

## Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC
Standards/regulations	PC

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

## Standards and regulations

### Testing

Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)
-----------------------	---

# HC-M-01-AT-M-40-PE - Contact insert module




1417382

<https://www.phoenixcontact.com/us/products/1417382>


## Drawings

Dimensional drawing

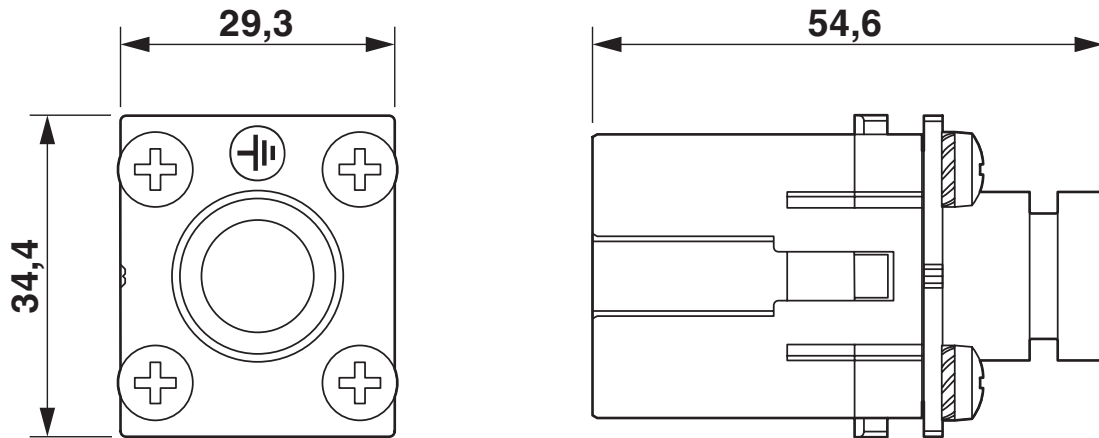


Male insert


Schematic diagram

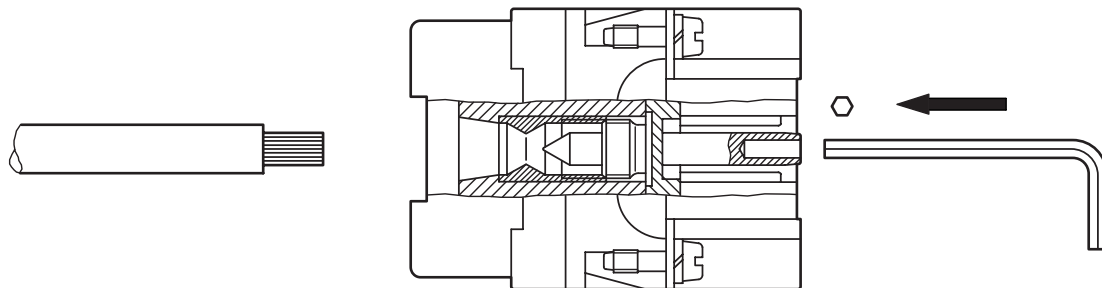

Axial screw connection

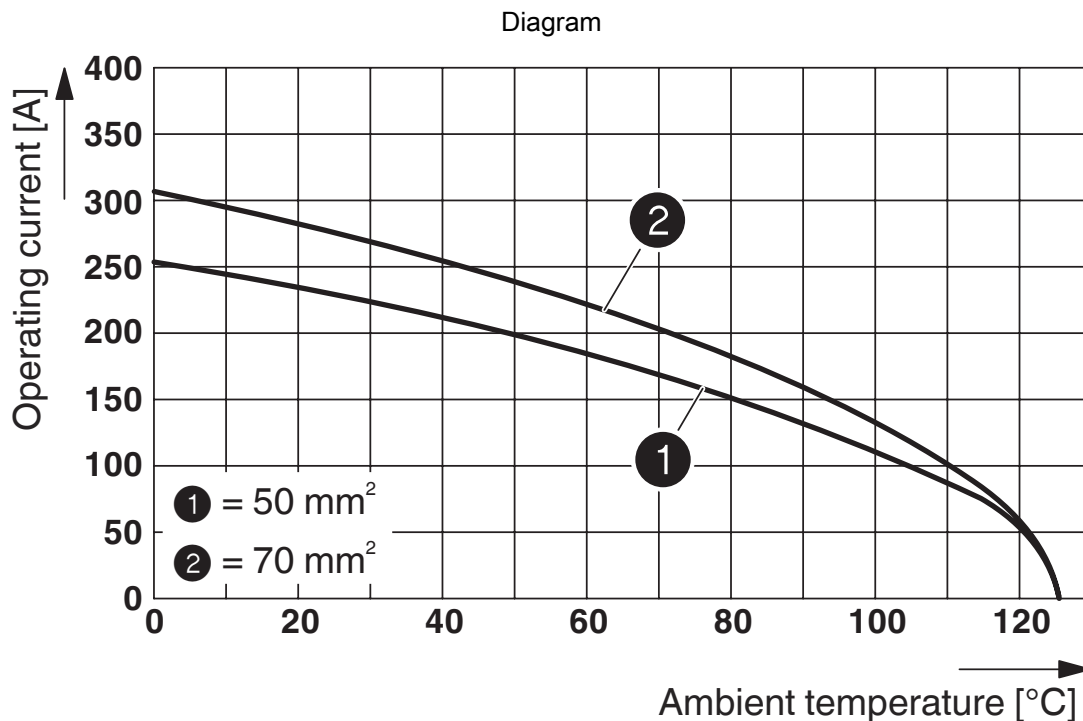

Three modules in B24 housing

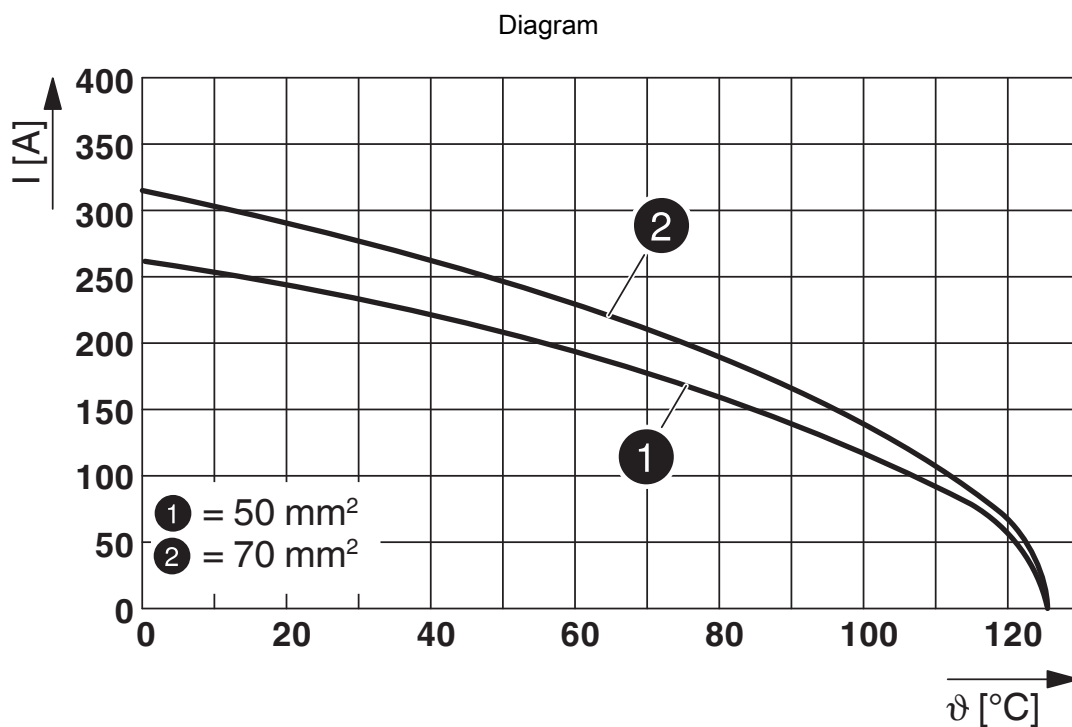

Two modules in B24 housing

# HC-M-01-AT-M-40-PE - Contact insert module





1417382

<https://www.phoenixcontact.com/us/products/1417382>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1417382>

 <b>UL Recognized</b> Approval ID: E118976				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
keine				
	600 V	-	- 00	-

 <b>UL Recognized</b> Approval ID: E468743				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
keine				
	600 V	-	-	-

# HC-M-01-AT-M-40-PE - Contact insert module



1417382

<https://www.phoenixcontact.com/us/products/1417382>

## Classifications

### ECLASS

ECLASS-13.0	27440217
ECLASS-15.0	27440217

### ETIM

ETIM 10.0	EC000438
-----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# HC-M-01-AT-M-40-PE - Contact insert module



1417382

<https://www.phoenixcontact.com/us/products/1417382>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

### EF3.1 Climate Change

CO2e kg	2.276 kg CO2e
---------	---------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)