

VS-FSDBPS-OE-93G-LI/2,0 - Device connector rear mounting



1419136

<https://www.phoenixcontact.com/us/products/1419136>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, EtherCAT® CAT5 (100 Mbps) CAT5 (100 Mbps), 4-position, Socket, straight, M12-SPEEDCON, D-coding, on free cable end, Cable connection, cable length: 5 m, this item is expected to be lead-free from Q1 2027 in accordance with RoHS II without exception 6c (Pb < 0.1%), a lead-free alternative is possible on request in advance

Your advantages

- Preassembled with cables in various standard lengths for immediate use
- Customer-specific assemblies and cable lengths can be supplied
- Sealed on the cable side for optimum tightness of seal
- Cable designs for all common networks and fieldbuses
- For high transmission safety: shield connection to the housing with optional EMC nut
- Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1%) available

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1419136 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | AB25 |
| Product key | ABQDGI |
| GTIN | 4046356540605 |
| Weight per piece (including packing) | 165.8 g |
| Weight per piece (excluding packing) | 148.629 g |
| Customs tariff number | 85444290 |
| Country of origin | DE |

VS-FSDBPS-OE-93G-LI/2,0 - Device connector rear mounting



1419136

<https://www.phoenixcontact.com/us/products/1419136>

Technical data

Notes

Safety note

| | |
|--|--|
| Safety note | <p>WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> |
| | <ul style="list-style-type: none">• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible. |
| | <ul style="list-style-type: none">• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product. |
| | <ul style="list-style-type: none">• The products are suitable for applications in plant, controller, and electrical device engineering. |
| | <ul style="list-style-type: none">• When operating the connectors in outdoor applications, they must be separately protected against environmental influences. |
| | <ul style="list-style-type: none">• Assembled products may not be manipulated or improperly opened. |
| | <ul style="list-style-type: none">• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). |
| | <ul style="list-style-type: none">• When using the product in direct connection with third-party manufacturers, the user is responsible. |
| | <ul style="list-style-type: none">• For operating voltages > 50 V AC, conductive connector housings must be grounded |
| | <ul style="list-style-type: none">• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards. |
| | <ul style="list-style-type: none">• Observe the corresponding technical data. You will find information:<ul style="list-style-type: none">o On the producto On the packing labelo In the supplied documentationo Online at phoenixcontact.com/products under the product |
| | <ul style="list-style-type: none">• Only use tools recommended by Phoenix Contact |
| | <ul style="list-style-type: none">• Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products |
| | <ul style="list-style-type: none">• Ensure that the protective or functional ground has been properly connected. |
| <ul style="list-style-type: none">• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector | |
| <ul style="list-style-type: none">• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting | |

VS-FSDBPS-OE-93G-LI/2,0 - Device connector rear mounting



1419136

<https://www.phoenixcontact.com/us/products/1419136>

warnings (e.g. DIN EN ISO 13732-1:2008-12).

Product properties

| | |
|----------------------|-------------------------|
| Product type | Data cable preassembled |
| Application | Data |
| Sensor type | EtherCAT® |
| Number of positions | 4 |
| No. of cable outlets | 1 |
| Coding | D |
| Thread type | M12 |

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 3 |

Interfaces

| | |
|----------------------|---|
| Bus system | EtherCAT® |
| Signal type/category | EtherCAT® CAT5 (IEC 11801:2002), 100 Mbps |

Electrical properties

| | |
|---|--|
| Rated surge voltage | 2.5 kV |
| Contact resistance | ≤ 3 mΩ |
| Insulation resistance | ≥ 100 MΩ |
| Nominal voltage U_N | 250 V |
| Nominal current I_N | 4 A (Plug/socket in accordance with IEC 61076-2-101, cable technical data is to be observed) |
| Transmission medium | Copper |
| Transmission speed | 100 Mbps |
| Transmission characteristics (category) | CAT5 (IEC 11801:2002) |

Mechanical properties

Mechanical data

| | |
|-----------------------------|-------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|-------|

Material specifications

| | |
|--|--------|
| Material Housing | GD-Zn |
| Material Insulating body | PA 6.6 |
| Material Contact | CuZn |
| Material Contact surface | Au |
| Material Seal | FKM |
| Flammability rating according to UL 94 | V0 |

Connection data

Connection technology

| | |
|-------------------|------------------|
| Connection method | Cable connection |
|-------------------|------------------|

VS-FSDBPS-OE-93G-LI/2,0 - Device connector rear mounting

1419136

<https://www.phoenixcontact.com/us/products/1419136>

Conductor connection

| | |
|-------------------------|-----------------------------------|
| Contact connection type | Socket |
| Connection method | Cable connection |
| Tightening torque | 2 Nm ... 3 Nm (Installation-side) |

Connector

Connection 1

| | |
|-------------------|----------|
| Head design | Socket |
| Head cable outlet | straight |
| Head thread type | M12 |
| Head locking type | SPEEDCON |
| Coding | D |


Connection 2

| | |
|-------------|----------------|
| Head design | free cable end |
|-------------|----------------|

Cable/line

| | |
|--------------|-----|
| Cable length | 5 m |
|--------------|-----|

PROFINET PVC stranded CAT5 [93B]

| | |
|--------------------------------|--|
| Dimensional drawing |  |
| UL AWM Style | 21695 (80 °C / 600 V) |
| Number of positions | 4 |
| Shielded | yes |
| Cable type | PROFINET PVC stranded CAT5 [93B] |
| Conductor structure | 1x4xAWG22/7, SF/TQ |
| AWG signal line | 22 |
| Conductor cross-section | 4x 0.34 mm ² |
| Wire diameter incl. insulation | 1.5 mm ±0.1 mm |
| External cable diameter | 6.50 mm ±0.2 mm |
| Outer sheath, material | PVC |
| External sheath, color | green RAL 6018 |
| Conductor material | Tin-plated Cu litz wires |
| Material wire insulation | PE |
| Single wire, color | white, yellow, blue, orange |
| Overall twist | Star quad |
| Optical shield covering | 85 % |

VS-FSDBPS-OE-93G-LI/2,0 - Device connector rear mounting



1419136

<https://www.phoenixcontact.com/us/products/1419136>

| | |
|---|--|
| Insulation resistance | $\geq 5 \text{ G}\Omega\cdot\text{km}$ |
| Loop resistance | $\leq 120.00 \text{ }\Omega/\text{km}$ |
| Wave impedance | $100 \text{ }\Omega \pm 5 \text{ }\Omega$ (at 100 MHz) |
| Nominal voltage, cable | $\leq 600 \text{ V}$ |
| Test voltage Core/Core | 2000 V ((50 Hz/1 min)) |
| Test voltage Core/Shield | 2000.00 V ((50 Hz/1 min)) |
| Minimum bending radius, fixed installation | 4 x D |
| Minimum bending radius, flexible installation | 8 x D |
| Flame resistance | UL 1581, Section 1060 and UL 2556, Section 9.3 (FT1) |
| | UL 1685 (CSA FT 4) |
| | UL 1581, Section 1100 and UL 2556, Section 9.1 (HFT/FT2) |
| Resistance to oil | OIL RES I according to UL 2256 |
| Other resistance | UV resistant (according to UL 1581, Section 1200) |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -10 °C ... 70 °C (Cable, flexible installation) |

Standards and regulations

| | |
|--------------------------|------------------------------|
| Standard designation | M12 circular connector |
| Standards/specifications | according to IEC 61076-2-101 |

VS-FSDBPS-OE-93G-LI/2,0 - Device connector rear mounting

1419136

<https://www.phoenixcontact.com/us/products/1419136>

Drawings

Schematic diagram



Pin assignment M12 socket, 4-pos., D-coded, female side

Diagram




I = current strength, T = ambient temperature

VS-FSDBPS-OE-93G-LI/2,0 - Device connector rear mounting

1419136

<https://www.phoenixcontact.com/us/products/1419136>

Circuit diagram

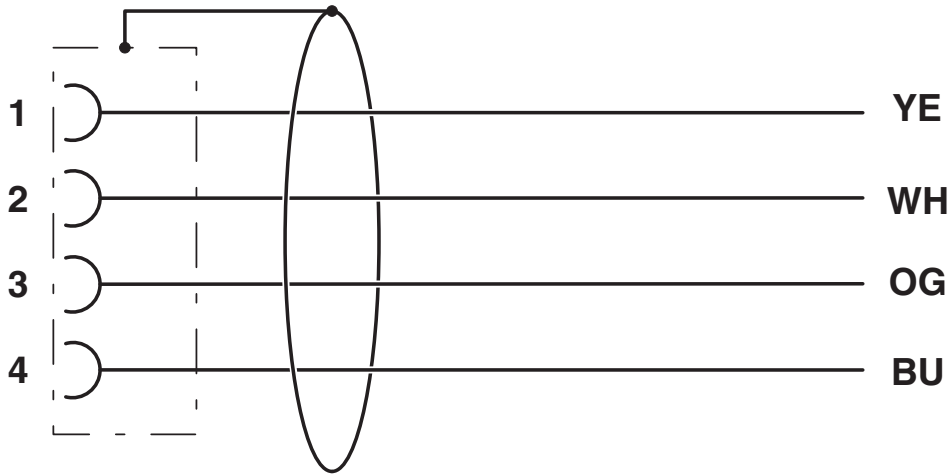

Contact assignment of the M12 socket

VS-FSDBPS-OE-93G-LI/2,0 - Device connector rear mounting



1419136

<https://www.phoenixcontact.com/us/products/1419136>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1419136>



EAC

Approval ID: 19060508

VS-FSDBPS-OE-93G-LI/2,0 - Device connector rear mounting



1419136

<https://www.phoenixcontact.com/us/products/1419136>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27440103 |
| ECLASS-15.0 | 27440103 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC003570 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

VS-FSDBPS-OE-93G-LI/2,0 - Device connector rear mounting



1419136

<https://www.phoenixcontact.com/us/products/1419136>

Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | e108bd26-b2d4-4bd0-9c28-3015823c93d2 |

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com