

VS-FSBPXS-OE-94S/0,5 WCP - Device connector rear mounting



1426045

<https://www.phoenixcontact.com/us/products/1426045>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, Ethernet CAT6_A (10 Gbps) CAT6_A, 8-position, Socket, straight, M12-SPEEDCON, X-coding, on free cable end, Bus line, cable length: 0.5 m, For railway applications, this item is expected to be lead-free from Q2 2026 in accordance with RoHS II without exception 6c (Pb < 0.1%), a lead-free alternative is possible on request in advance

Your advantages

- Preassembled with cables in various standard lengths for immediate use
- Customer-specific assemblies and cable lengths can be supplied
- Sealed on the cable side for optimum tightness of seal
- Cable designs for all common networks and fieldbuses
- For high transmission safety: shield connection to the housing with optional EMC nut

Commercial data

Item number	1426045
Packing unit	1 pc
Minimum order quantity	50 pc
Product key	ABQDGI
GTIN	4055626436791
Weight per piece (including packing)	68.4 g
Weight per piece (excluding packing)	53.316 g
Country of origin	DE

VS-FSBPXS-OE-94S/0,5 WCP - Device connector rear mounting



1426045

<https://www.phoenixcontact.com/us/products/1426045>

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Note on the contact	Contact connection method: Crimp connection

Safety note

Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
	• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.
	• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
	• The products are suitable for applications in plant, controller, and electrical device engineering.
	• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
	• Assembled products may not be manipulated or improperly opened.
	• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
	• When using the product in direct connection with third-party manufacturers, the user is responsible.
	• For operating voltages > 50 V AC, conductive connector housings must be grounded
	• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
	• Observe the corresponding technical data. You will find information: <ul style="list-style-type: none">o On the producto On the packing labelo In the supplied documentationo Online at phoenixcontact.com/products under the product
	• Only use tools recommended by Phoenix Contact
	• Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory

VS-FSBPXS-OE-94S/0,5 WCP - Device connector rear mounting



1426045

<https://www.phoenixcontact.com/us/products/1426045>

	section of the product at phoenixcontact.com/products
	<ul style="list-style-type: none">• Ensure that the protective or functional ground has been properly connected.• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

Product properties

Product type	Data cable preassembled
Application	Railway applications
Number of positions	8
No. of cable outlets	1
Coding	X
Thread type	M12

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Interfaces

Bus system	Ethernet
Signal type/category	Ethernet CAT6 _A , 10 Gbps

Electrical properties

Rated surge voltage	0.8 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	50 V AC 60 V DC
Nominal current I _N	0.5 A (Plug/socket in accordance with IEC 61076-2-101, cable technical data is to be observed)
Transmission medium	Copper
Transmission speed	10 Gbps
Transmission characteristics (category)	CAT6 _A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 100
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
--	----

VS-FSBPXS-OE-94S/0,5 WCP - Device connector rear mounting

1426045

<https://www.phoenixcontact.com/us/products/1426045>

Connection data

Connection technology

Connection method	Bus line
-------------------	----------

Conductor connection

Contact connection type	Socket
Connection method	Bus line
Tightening torque	2 Nm ... 3 Nm (Installation-side)

Connector

Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	M12
Head locking type	SPEEDCON
Coding	X


Connection 2

Head design	free cable end
-------------	----------------

Cable/line

Cable length	0.5 m
--------------	-------

Ethernet BETAtrans® railway application CAT7 [94S]

Dimensional drawing	
Cable weight	59 kg/km
Copper weight	28 kg/km
Number of positions	8
Shielded	yes
Cable type	Ethernet BETAtrans® railway application CAT7 [94S]
Conductor structure	4x2xAWG26/7; S/FTP
Signal runtime	4.4 ns/m
Signal speed	0.78 c
Conductor structure signal line	7x 0.16 mm
AWG signal line	26

VS-FSBPXS-OE-94S/0,5 WCP - Device connector rear mounting



1426045

<https://www.phoenixcontact.com/us/products/1426045>

Conductor cross-section	4x 2x 0.14 mm ²
Wire diameter incl. insulation	1.05 mm ±0.1 mm
External cable diameter	6.60 mm ±0.2 mm
Outer sheath, material	PE-X
External sheath, color	black
Conductor material	Tin-plated Cu litz wires
Material wire insulation	Cell PE
Single wire, color	white-blue, white-orange, white-green, white-brown
Twisted pairs	2 cores to the pair
Type of pair shielding	Aluminum-lined polyester foil
Overall twist	4 pairs, twisted
Max. conductor resistance	≤ 145 Ω/km
Insulation resistance	≥ 5 GΩ*km
Coupling resistance	5.00 mΩ/m (at 10 MHz)
Wave impedance	100 Ω ±5 Ω (at 100 MHz)
Working capacitance	44 nF (per kilometer)
Nominal voltage, cable	125 V AC (U _o)
Test voltage Core/Core	1000 V AC (50 Hz, 1 min.)
Test voltage Core/Shield	1000.00 V AC (50 Hz, 1 min.)
Minimum bending radius, fixed installation	6 x D
Smallest bending radius, fixed installation	40 mm
Tensile strength	≤ 60 N (temporary) ≤ 15 N (Permanent)
Near end crosstalk attenuation (NEXT)	100 dB (with 1 MHz) 99 dB (at 10 MHz) 95 dB (at 100 MHz) 92 dB (at 200 MHz) 90 dB (at 250 MHz) 83 dB (at 500 MHz) 81 dB (at 600 MHz) 80 dB (at 700 MHz) 77 dB (at 800 MHz) 75 dB (at 900 MHz) 74 dB (at 1000 MHz) 72 dB (at 1100 MHz) 70 dB (at 1200 MHz)
Power-summated near end crosstalk attenuation (PSNEXT)	97 dB (with 1 MHz) 96 dB (at 10 MHz) 92 dB (at 100 MHz) 89 dB (at 200 MHz) 87 dB (at 250 MHz) 80 dB (at 500 MHz)

VS-FSBPXS-OE-94S/0,5 WCP - Device connector rear mounting



1426045

<https://www.phoenixcontact.com/us/products/1426045>

	78 dB (at 600 MHz)
	77 dB (at 700 MHz)
	74 dB (at 800 MHz)
	72 dB (at 900 MHz)
	71 dB (at 1000 MHz)
	69 dB (at 1100 MHz)
	67 dB (at 1200 MHz)
Return attenuation (RL)	24 dB (with 1 MHz)
	33.9 dB (at 10 MHz)
	38.3 dB (at 100 MHz)
	35.3 dB (at 200 MHz)
	32.9 dB (at 250 MHz)
	29.7 dB (at 500 MHz)
	30.6 dB (at 600 MHz)
	31 dB (at 700 MHz)
	26.7 dB (at 800 MHz)
	28.6 dB (at 900 MHz)
	27.5 dB (at 1000 MHz)
	26.9 dB (at 1100 MHz)
	26.3 dB (at 1200 MHz)
Crosstalk attenuation (ACR)	100 dB (with 1 MHz)
	99 dB (at 10 MHz)
	93 dB (at 100 MHz)
	88 dB (at 200 MHz)
	86 dB (at 250 MHz)
	78 dB (at 500 MHz)
	74 dB (at 600 MHz)
	72 dB (at 700 MHz)
	69 dB (at 800 MHz)
	67 dB (at 900 MHz)
	65 dB (at 1000 MHz)
	63 dB (at 1100 MHz)
	61 dB (at 1200 MHz)
Power-summated crosstalk attenuation (PS-ACR)	97 dB (with 1 MHz)
	96 dB (at 10 MHz)
	90 dB (at 100 MHz)
	85 dB (at 200 MHz)
	83 dB (at 250 MHz)
	75 dB (at 500 MHz)
	71 dB (at 600 MHz)
	69 dB (at 700 MHz)
	66 dB (at 800 MHz)

VS-FSBPXS-OE-94S/0,5 WCP - Device connector rear mounting



1426045

<https://www.phoenixcontact.com/us/products/1426045>

	64 dB (at 900 MHz)
	62 dB (at 1000 MHz)
	60 dB (at 1100 MHz)
	58 dB (at 1200 MHz)
Shield attenuation	0.25 dB (with 1 MHz)
	0.76 dB (at 10 MHz)
	2.49 dB (at 100 MHz)
	3.69 dB (at 200 MHz)
	4.18 dB (at 100 MHz)
	5.6 dB (at 500 MHz)
	6.74 dB (at 600 MHz)
	7.32 dB (at 700 MHz)
	7.89 dB (at 800 MHz)
	8.5 dB (at 900 MHz)
	9.11 dB (at 1000 MHz)
	9.5 dB (at 1100 MHz)
	9.9 dB (at 1200 MHz)
	60.00 dB (up to 1000 MHz)
Halogen-free	in accordance with EN 50267-2-1
	in accordance with EN 60684-2
Flame resistance	in accordance with EN 60332-1-2
	EN 60332-3-25
	in accordance with ISO 14572 5.21 (UN ECE-R 118.01)
Concentration of fumes	EN 61034-2
Resistance to oil	in accordance with EN 50306-4, 72 hours at 100°C, IRM 902
Fire protection in rail vehicles	BS 6853 (Internal cable Ia, Ib, II/external cable Ia, Ib, II)
	DIN 5510-2 (Fire protection level 1, 2, 3, 4)
	EN 45545-2 (Risk level HL1 - HL3)
	EN 50306-4
	NF F16-101 (Classification C/F1)
	NF F16-101 (Internal cable A1, A2, B/external cable A1, A2, B)
	NFPA 130
	PN-K-02511 (Class A)
	UIC 564-2 (Class A)
Other resistance	Resistant to fuel (in accordance with EN 50306-4, 168 hours at 70°C, IRM 903)
	Resistant to ozone (in accordance with EN 50306-4, 72 hours at 40°C, method B, volumetric concentration of 200×10^{-6})
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation)

Environmental and real-life conditions

Ambient conditions

IP67

VS-FSBPXS-OE-94S/0,5 WCP - Device connector rear mounting



1426045

<https://www.phoenixcontact.com/us/products/1426045>

Degree of protection	IP65
	IP65/IP67
Ambient temperature (operation) (male connector/female connector)	-25 °C ... 85 °C (Plug / socket)
	-40 °C ... 85 °C (without mechanical actuation)
UL Type Rating	Type 4 (indoor use only)

Standards and regulations

Standard designation	M12 circular connector
Standards/specifications	according to IEC 61076-2-109
Standard designation	Shock, vibration
Standards/specifications	according to EN 50155
Standard designation	Shock, vibration
Standards/specifications	according to EN 61373:2011

VS-FSBPXS-OE-94S/0,5 WCP - Device connector rear mounting




1426045

<https://www.phoenixcontact.com/us/products/1426045>


Drawings

Schematic diagram

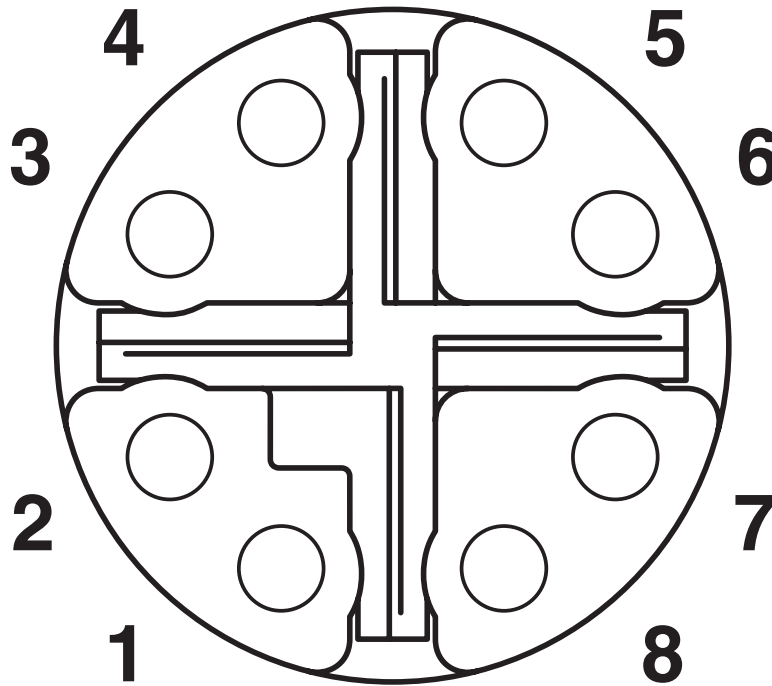

M12 socket pin assignment, 8-pos, view of socket side

Diagram

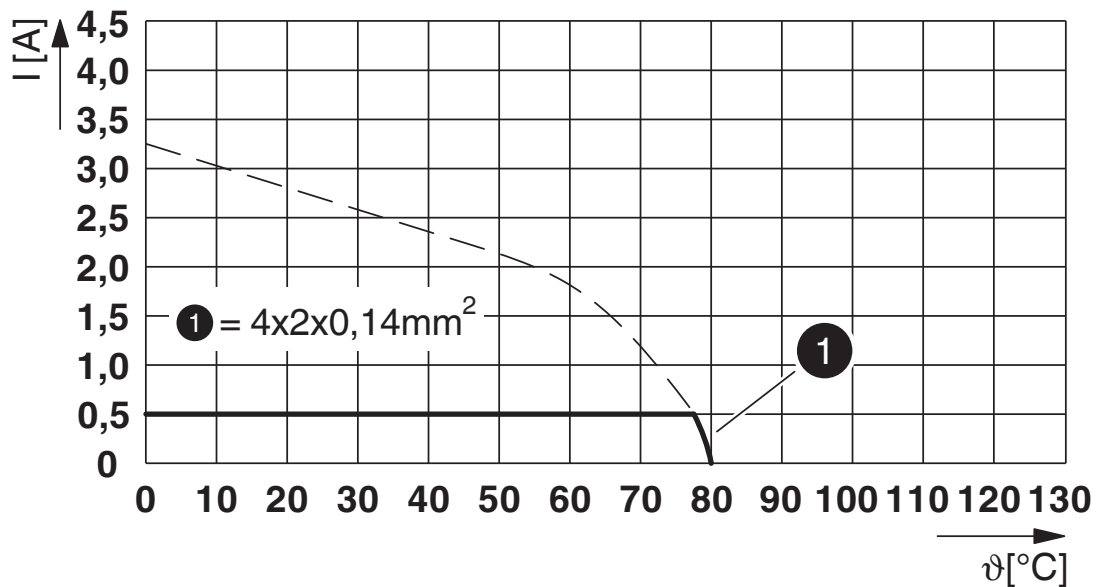


I = current strength, T = ambient temperature

VS-FSBPXS-OE-94S/0,5 WCP - Device connector rear mounting

1426045

<https://www.phoenixcontact.com/us/products/1426045>

Circuit diagram

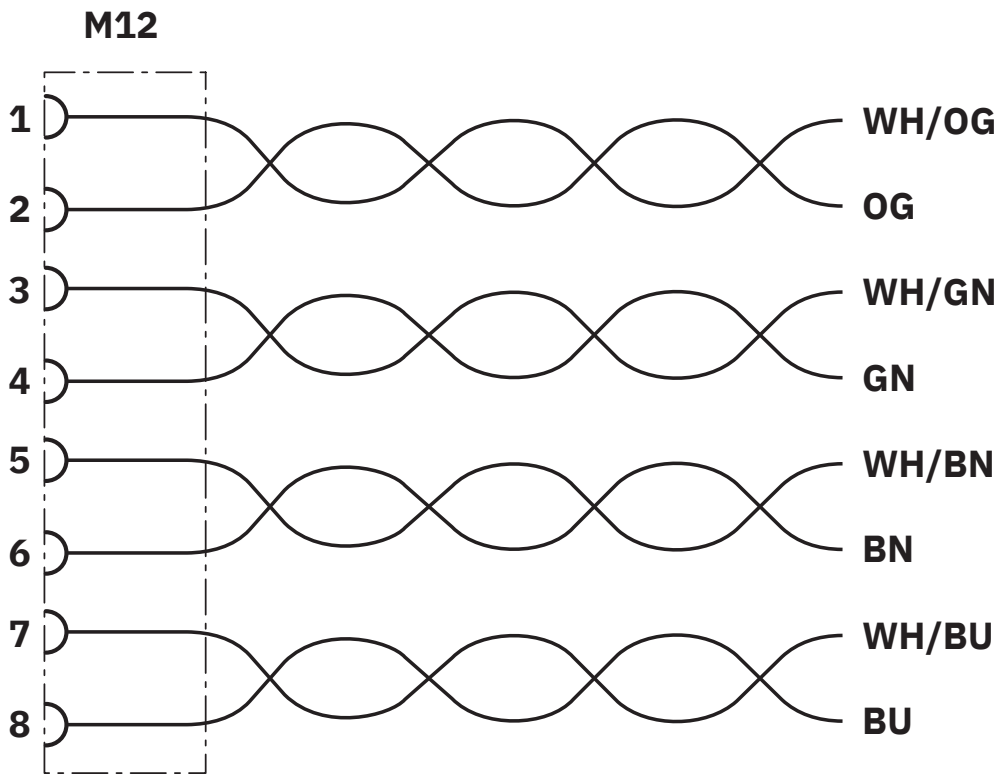

Contact assignment of the M12 socket

VS-FSBPXS-OE-94S/0,5 WCP - Device connector rear mounting



1426045

<https://www.phoenixcontact.com/us/products/1426045>

Classifications

ECLASS

ECLASS-13.0	27060311
ECLASS-15.0	27060311

ETIM

ETIM 10.0	EC001855
-----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

VS-FSBPXS-OE-94S/0,5 WCP - Device connector rear mounting



1426045

<https://www.phoenixcontact.com/us/products/1426045>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	87e66644-80cf-4349-8b68-a90fbf833967

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com