

SACC-MCI-M12MS-5CON/0,5 - Contact carrier



1440818

<https://www.phoenixcontact.com/us/products/1440818>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



The figure shows the 5-position version of the product

Contact carrier, Universal, 5-position, Pin, straight, M12, A-coding, on free cable end, Individual wires, cable length: 0.5 m, 0.34 mm², TPE litz wire, this item is expected to be lead-free from Q2 2026 in accordance with RoHS II without exception 6c (Pb < 0.1%), a lead-free alternative is possible on request in advance

Your advantages

- Convenient field assembly: device connectors for fast on-site mounting
- Contact carriers that are designed for assembly or available with preassembled litz wires
- Customer-specific assemblies and litz wire lengths available
- Standard pin assignments for signal and power transmission with a uniform design-in design

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1440818 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | AB24 |
| Product key | ABQCED |
| GTIN | 4046356533621 |
| Weight per piece (including packing) | 24.1 g |
| Weight per piece (excluding packing) | 12.16 g |
| Customs tariff number | 85444290 |
| Country of origin | DE |

Technical data

Notes

| | |
|--------------------|--|
| Notes on operation | The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration. |
|--------------------|--|

Safety note

| | |
|--|--|
| Safety note | WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property. |
| | <ul style="list-style-type: none"> • WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible. |
| | <ul style="list-style-type: none"> • WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product. |
| | <ul style="list-style-type: none"> • The products are suitable for applications in plant, controller, and electrical device engineering. |
| | <ul style="list-style-type: none"> • When operating the connectors in outdoor applications, they must be separately protected against environmental influences. |
| | <ul style="list-style-type: none"> • Assembled products may not be manipulated or improperly opened. |
| | <ul style="list-style-type: none"> • Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). |
| | <ul style="list-style-type: none"> • When using the product in direct connection with third-party manufacturers, the user is responsible. |
| | <ul style="list-style-type: none"> • For operating voltages > 50 V AC, conductive connector housings must be grounded |
| | <ul style="list-style-type: none"> • Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards. |
| | <ul style="list-style-type: none"> • Observe the corresponding technical data. You will find information: <ul style="list-style-type: none"> o On the product o On the packing label o In the supplied documentation o Online at phoenixcontact.com/products under the product |
| | <ul style="list-style-type: none"> • Only use tools recommended by Phoenix Contact |
| | <ul style="list-style-type: none"> • Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products |
| <ul style="list-style-type: none"> • Ensure that the protective or functional ground has been properly connected. | |

SACC-MCI-M12MS-5CON/0,5 - Contact carrier



1440818

<https://www.phoenixcontact.com/us/products/1440818>

| | |
|--|--|
| | <ul style="list-style-type: none">• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12). |
|--|--|

Product properties

| | |
|-------------------------|----------------|
| Product type | Contact insert |
| Application | Signal |
| Sensor type | Universal |
| Number of positions | 5 |
| No. of cable outlets | 1 |
| No. of control contacts | 5 |
| Shielded | no |
| Coding | A |
| Thread type | M12 |

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 3 |

Electrical properties

| | |
|---------------------------|----------------------------|
| Rated surge voltage | 1.5 kV |
| Contact resistance | $\leq 3 \text{ m}\Omega$ |
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage U_N | 60 V AC 60 V DC |
| Nominal current I_N | 4 A |
| Transmission medium | Copper |
| Max. conductor resistance | 57.6 m Ω /m |

Connection data

| | |
|-------------------|------------------|
| Connection method | Individual wires |
|-------------------|------------------|

Interfaces

| | |
|----------------------|-----------|
| Signal type/category | Universal |
|----------------------|-----------|

Signaling

| | |
|------------------------|----|
| Status display | no |
| Status display present | no |

Material specifications

| | |
|--------------------------|--------|
| Material Contact carrier | PA 6.6 |
| Material Contact | CuZn |
| Material Contact surface | Au |

SACC-MCI-M12MS-5CON/0,5 - Contact carrier



1440818

<https://www.phoenixcontact.com/us/products/1440818>

| | |
|--|--------------------------|
| Flammability rating according to UL 94 | V0 |
| Conductor material | Tin-plated Cu litz wires |

Connector

Connection 1

| | |
|-------------------|----------|
| Head design | Pin |
| Head cable outlet | straight |
| Head thread type | M12 |
| Coding | A |

Connection 2

| | |
|-------------|----------------|
| Head design | free cable end |
|-------------|----------------|

Cable/line

| | |
|---------------------------------|---|
| Cable length | 0.5 m |
| Cable type | TPE litz wire |
| Signal type/category | Universal |
| Wire diameter incl. insulation | 1.2 mm ±0.07 mm |
| Single wire, color | black, brown, blue, white, gray |
| Cable cross section | 0.34 mm ² |
| Conductor material | Tin-plated Cu litz wires |
| Conductor structure signal line | 7x 0.25 mm |
| AWG signal line | 22 |
| Material wire insulation | TPE |
| Thickness, insulation | 0.21 mm (Core insulation) |
| Nominal voltage, cable | 300 V |
| Test voltage, cable | 3000 V AC |
| Cable resistance | ≤ 57.6 mΩ/m |
| Cable insulation resistance | ≥ 20 MΩ*km |
| Ambient temperature (operation) | -40 °C ... 85 °C (cable, fixed installation) -25 °C ... 85 °C (Cable, flexible installation) |

Environmental and real-life conditions

Ambient conditions

| | |
|---|---|
| Degree of protection | IP67 |
| Ambient temperature (operation) (male connector/female connector) | -25 °C ... 85 °C |
| Ambient temperature (operation) (fixed installation) | -40 °C ... 85 °C (without mechanical actuation) |
| Ambient temperature (operation) (Cable, flexible installation) | -25 °C ... 85 °C (Cable, flexible installation) |
| Ambient temperature (operation) (Cable, fixed installation) | -40 °C ... 85 °C (cable, fixed installation) |
| UL Type Rating | Type 4 (indoor use only) |

Standards and regulations

| | |
|----------------------|------------------------|
| Standard designation | M12 circular connector |
|----------------------|------------------------|

SACC-MCI-M12MS-5CON/0,5 - Contact carrier



1440818

<https://www.phoenixcontact.com/us/products/1440818>

Standards/specifications

according to IEC 61076-2-101


Mounting

Mounting type

Front/square flange mounting (25 mm side length)


Drawings

Schematic diagram

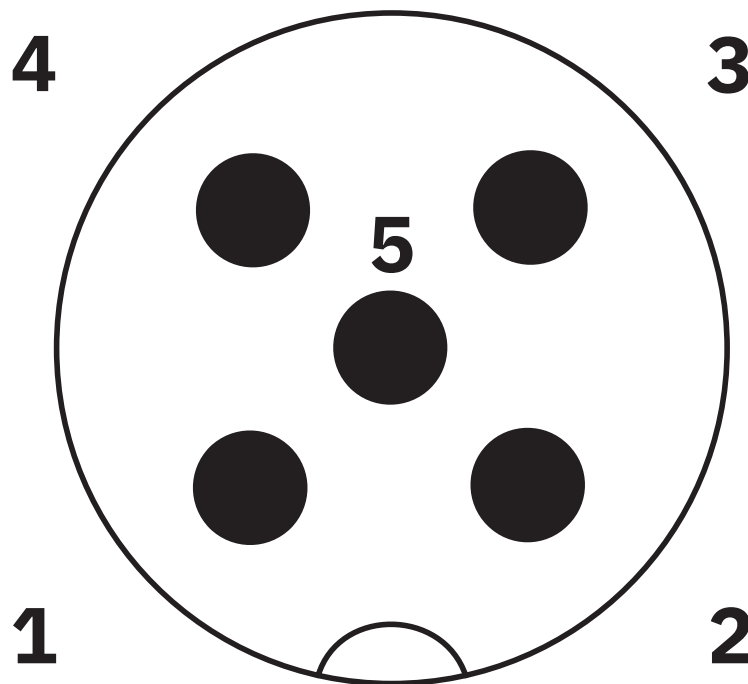

Pin assignment M12 male connector, 5-pos., A-coded, male side

Diagram

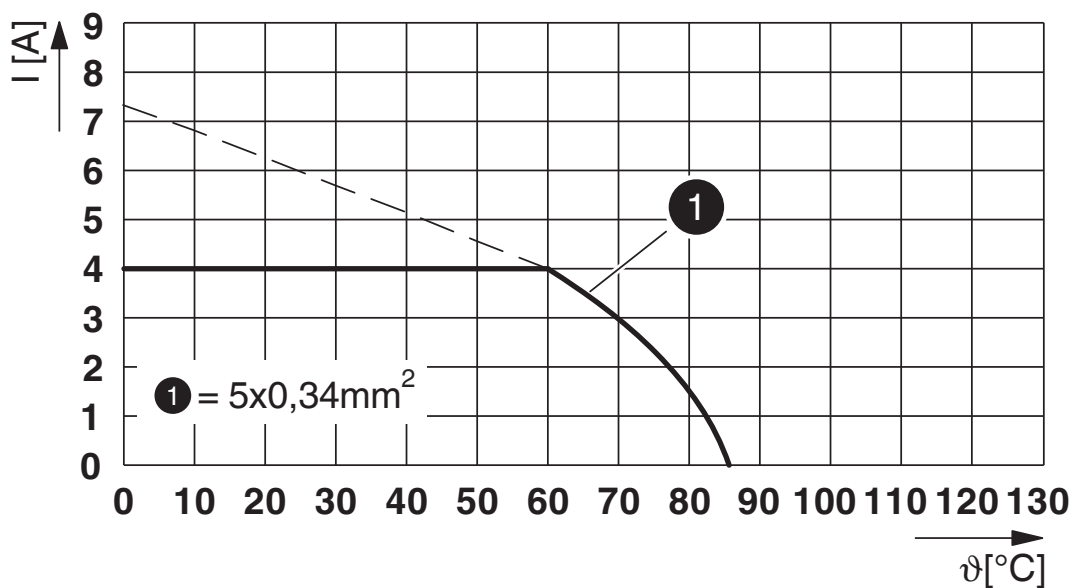

I = current strength, T = ambient temperature

SACC-MCI-M12MS-5CON/0,5 - Contact carrier



1440818

<https://www.phoenixcontact.com/us/products/1440818>

Circuit diagram



Contact assignment of the M12 plug

SACC-MCI-M12MS-5CON/0,5 - Contact carrier



1440818

<https://www.phoenixcontact.com/us/products/1440818>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27440223 |
| ECLASS-15.0 | 27440223 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC003557 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

1440818

<https://www.phoenixcontact.com/us/products/1440818>

Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | 6f59dcd8-14be-4223-b34d-e5f15add6871 |

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com