

HC-Q02-I-AT-M - Contact insert



1496723

<https://www.phoenixcontact.com/us/products/1496723>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 2+PE, size: D7, power contacts: 2, number of connections per position: 1, Pin, Axial screw connection, 400 V, 40 A, 1.5 mm² ... 10 mm², application: Power

Your advantages

- Shock and vibration-resistant in accordance with DIN EN 61373

Commercial data

Item number	1496723
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF61
Product key	AF7ABJ
GTIN	4063151946180
Weight per piece (including packing)	23.3 g
Weight per piece (excluding packing)	22.22 g
Customs tariff number	85366990
Country of origin	PL

Technical data

Mounting

<p>Assembly note</p>	<p>To ensure correct use, installation in housing with IP54 protection or better is required</p> <p>Note regarding axial connection technology: Only for stranded wires. The specified conductor cross-sections refer to the geometric cross section of the cable used. Cables with a geometric cross section which deviates significantly from the nominal cable cross section must be checked before use. The axial connection technology connection space is designed for fine strand cables according to VDE 0295 Class 5. Deviating cable structures (e.g., Class 6 cables) must be checked before use.</p> <p>Assembly instructions Before assembly, ensure that the tapered screw is fully loosened (chamber is open). Cables must not be twisted. The wires must be pushed into the contact chamber as far as they will go (until the insulation touches the contact). Hold the wires in position and tighten using an Allen key. The used wire end must be cut off before reconnection. The terminal screw must only be retightened once to prevent the litz wires from breaking. To prevent damage to the contact, the wire/cable must be mechanically held at an appropriate distance from the connection point (e.g., when used in a plate cut out). For notes on correct execution, see DIN VDE 0100-520:2003-06. Unused connections must be tightened with maximum torque.</p>
<p>Hexagonal socket</p>	<p>SW2,0</p>

Product properties

<p>Product type</p>	<p>Contact insert with a fixed no. of positions</p>
<p>Series</p>	<p>HC-Q</p>
<p>Application</p>	<p>Power</p>
<p>Type</p>	<p>D7</p>
<p>Number of positions</p>	<p>2</p>
<p>Connection profile</p>	<p>2+PE</p>
<p>Number of connections per position</p>	<p>1</p>
<p>No. of power contacts</p>	<p>2</p>
<p>Contact material type</p>	<p>turned</p>

<p>Insulation characteristics</p>	
<p>Overvoltage category</p>	<p>III</p>
<p>Degree of pollution</p>	<p>3</p>

Dimensions

<p>Mechanical characteristics</p>	
<p>Contact diameter</p>	<p>4 mm</p>

HC-Q02-I-AT-M - Contact insert



1496723

<https://www.phoenixcontact.com/us/products/1496723>

Connection data

Connection technology

Connection technology	Axial screw connection
Number of connections per position	1
Connection in acc. with standard	IEC / EN

Conductor connection

Conductor cross-section	1.5 mm ² ... 10 mm ² (The cross section specification refers to the geometric cross section of the cable used)
Tightening torque	0.5 Nm ... 0.8 Nm (Mounting screws for mounting in the HEAVYCON housing)
	0.5 Nm (1.5 mm ²)
	0.8 Nm (2.5 mm ² ... 4 mm ²)
	1.5 Nm (6 mm ² ... 10 mm ²)
Stripping length of the individual wire	6 mm
Stripping length	5 mm ... 7 mm

Electrical properties

Rated voltage (III/3)	400 V
Rated surge voltage	6 kV
Rated current	40 A
SCCR	5 kA

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Seal material	NBR
Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC
Standards/regulations	PC

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

Standards and regulations

Testing

Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)
-----------------------	---


HC-Q02-I-AT-M - Contact insert

1496723

<https://www.phoenixcontact.com/us/products/1496723>


Drawings

Dimensional drawing

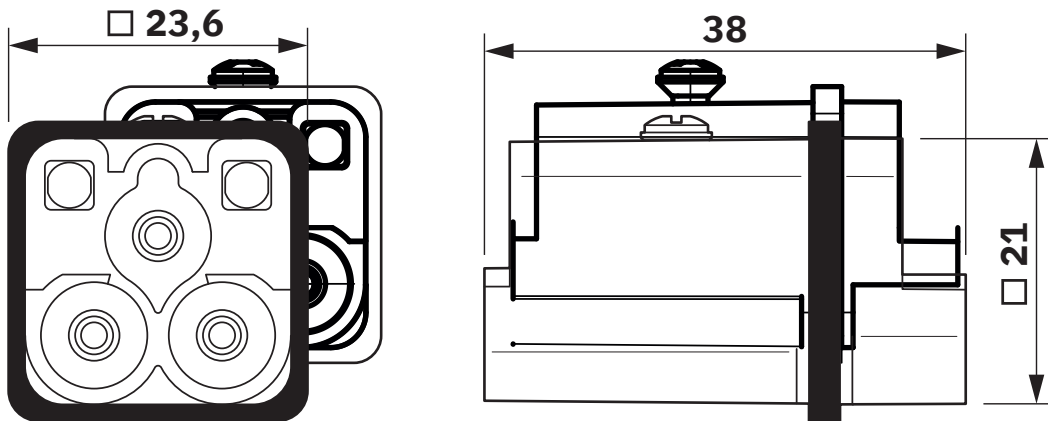

Male insert

Schematic diagram

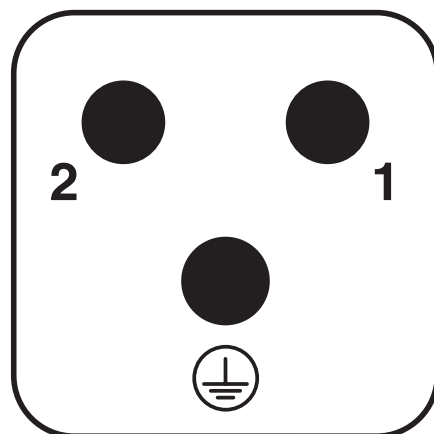


Connector pin assignment

HC-Q02-I-AT-M - Contact insert

1496723


<https://www.phoenixcontact.com/us/products/1496723>

Schematic diagram

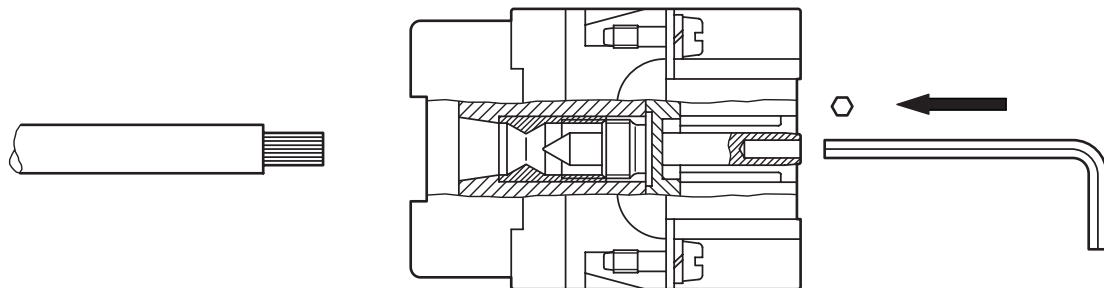

Axial screw connection

Diagram

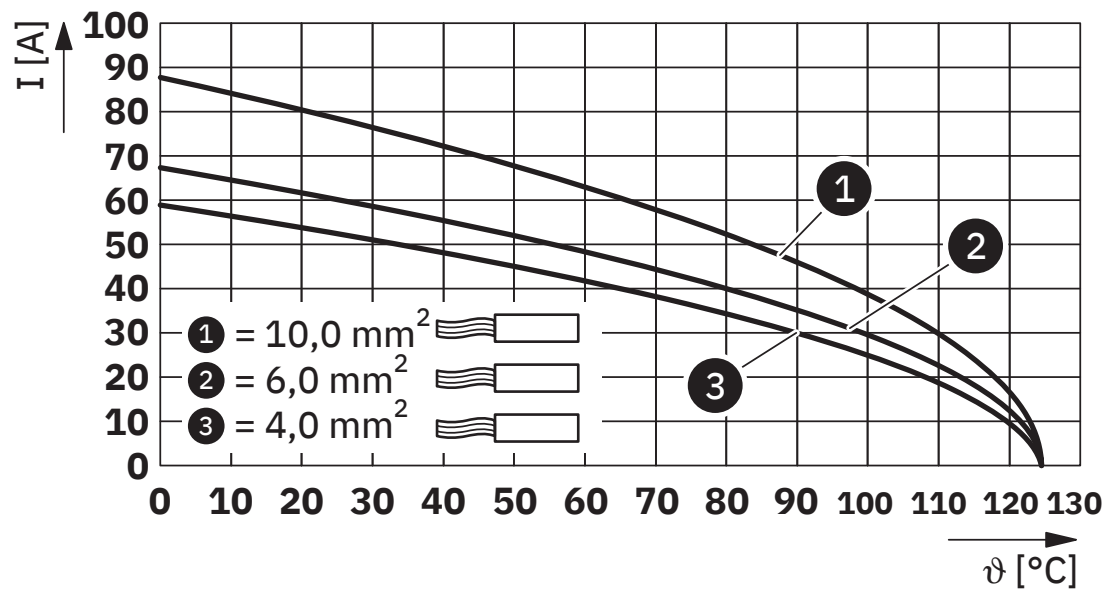

Derating diagram

HC-Q02-I-AT-M - Contact insert





1496723

<https://www.phoenixcontact.com/us/products/1496723>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1496723>

 UL Recognized Approval ID: E468743				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
Power	600 V	45 A	- 8	-
PE connection	-	-	- 10	-

 CSA Approval ID: 158887				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
Power	600 V	45 A	- 8	-
PE connection	-	-	- 10	-

HC-Q02-I-AT-M - Contact insert



1496723

<https://www.phoenixcontact.com/us/products/1496723>

Classifications

ECLASS

ECLASS-13.0	27440205
ECLASS-15.0	27440205

ETIM

ETIM 10.0	EC000438
-----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

HC-Q02-I-AT-M - Contact insert



1496723

<https://www.phoenixcontact.com/us/products/1496723>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com