

QUINT-PS/3AC/48DC/20 - Power supply



2320827

<https://www.phoenixcontact.com/us/products/2320827>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Primary-switched power supply unit QUINT POWER, Screw connection, DIN rail mounting, SFB Technology (Selective Fuse Breaking), input: 3-phase, output: 48 V DC / 20 A, adjustable from 30 V DC ... 56 V DC. Please use the following item for new projects: 2904627 QUINT4-PS/3AC/48DC/20

Product description

QUINT POWER power supplies with maximum functionality

QUINT POWER circuit breakers magnetically and therefore quickly trip at six times the nominal current, for selective and therefore cost-effective system protection. The high level of system availability is additionally ensured, thanks to preventive function monitoring, as it reports critical operating states before errors occur.

Reliable starting of heavy loads takes place via the static power reserve POWER BOOST. Thanks to the adjustable voltage, all ranges between 5 V DC ... 56 V DC are covered.

Your advantages

- Adjustable output voltage of 30 to 56 V DC
- Reliable starting of difficult loads with the static POWER BOOST power reserve with up to 1.5 times the nominal current permanently
- Fast tripping of standard circuit breakers with dynamic power reserve SFB (selective fuse breaking) technology with up to 6 times the nominal current for 12 ms
- Preventive function monitoring indicates critical operating states before errors occur

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2320827 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | CM11 |
| Product key | CMPQ34 |
| GTIN | 4046356547734 |
| Weight per piece (including packing) | 2,912.1 g |
| Weight per piece (excluding packing) | 2,500 g |
| Customs tariff number | 85044095 |
| Country of origin | TH |

Technical data

Input data

AC operation

| | |
|--|--|
| Nominal input voltage range | 3x 400 V AC ... 500 V AC |
| Input voltage range | 3x 400 V AC ... 500 V AC -20 % ... +15 % |
| Voltage type of supply voltage | AC |
| Inrush current | < 20 A (typical) |
| Inrush current integral (I^2t) | < 1 A ² s |
| Inrush current limitation | 20 A |
| AC frequency range | 45 Hz ... 65 Hz |
| Frequency range DC | 0 Hz |
| Mains buffering time | > 25 ms (400 V AC) > 35 ms (500 V AC) |
| Current consumption | 3x 2.1 A (400 V AC) 3x 1.7 A (500 V AC) 1.7 A (600 V DC) |
| Nominal power consumption | 1386 VA |
| Protective circuit | Transient surge protection; Varistor |
| Typical response time | < 1 s |
| Permissible backup fuse | B6 B10 B16 AC: |
| Permissible DC backup fuse | DC: Connect a suitable fuse upstream |
| Recommended breaker for input protection | 6 A ... 20 A (Characteristic B, C, D, K or comparable) |
| Discharge current to PE | < 3.5 mA |

DC operation

| | |
|--|---|
| Nominal input voltage range | 500 V DC ... 600 V DC |
| Input voltage range | 500 V DC ... 600 V DC -10 % ... +33 % (mid-point earthed) |
| Voltage type of supply voltage | DC |
| Current consumption | 2.2 A (500 V DC) 1.9 A (600 V DC) |
| Recommended breaker for input protection | 1x 6 A \geq 1000 V DC (10 x 38 mm, 30 kA L/R = 2 ms) |

Output data

| | |
|---|---|
| Efficiency | typ. 93 % (400 V AC) |
| Output characteristic | U/I |
| Nominal output voltage | 48 V DC \pm 1 % |
| Setting range of the output voltage (U_{Set}) | 30 V DC ... 56 V DC (> 48 V DC, constant capacity restricted) |
| Nominal output current (I_N) | 20 A |
| POWER BOOST (I_{Boost}) | 22.5 A (-25 °C ... 40 °C permanent, U_{OUT} = 48 V DC) |
| Static Boost ($I_{Stat.Boost}$) | 22.5 A |
| Selective Fuse Breaking (I_{SFB}) | 100 A (12 ms) |
| Magnetic circuit breaker tripping | B2 / B4 / B6 / B10 / C2 / C4 / C6 |

QUINT-PS/3AC/48DC/20 - Power supply



2320827

<https://www.phoenixcontact.com/us/products/2320827>

| | |
|--|--|
| Derating | 60 °C ... 70 °C (2.5 %/K) |
| Feedback voltage resistance | max. 60 V DC |
| Protection against overvoltage at the output (OVP) | < 60 V DC |
| Active current limitation | Approx. $I_{BOOST} = 22.5 \text{ A}$ (for short-circuit) |
| Control deviation | < 1 % (change in load, static 10 % ... 90 %) |
| | < 4 % (change in load, dynamic 10 % ... 90 %) |
| | < 0.1 % (change in input voltage $\pm 10 \%$) |
| Residual ripple | < 50 mV _{PP} (with nominal values) |
| Output power | 960 W |
| | 1080 W |
| Maximum no-load power dissipation | 24 W |
| Power loss nominal load max. | 70 W |
| Rise time | < 0.5 ms (U_{OUT} (10 % ... 90 %)) |
| Connection in parallel | yes, for redundancy and increased capacity |
| Connection in series | yes |

Signal: DC OK active

| | |
|-------------------------|--|
| Output description | $U_{OUT} > 0.9 \times U_N$: High signal |
| Switching voltage range | 18 V DC ... 24 V DC |
| Maximum inrush current | $\leq 20 \text{ mA}$ (short-circuit-proof) |
| Continuous load current | $\leq 20 \text{ mA}$ |

Signal: DC OK floating

| | |
|---------------------------|--|
| Output description | Relay contact, $U_{OUT} > 0.9 \times U_N$: Contact closed |
| Maximum switching voltage | 30 V AC/DC |
| | 24 V DC |
| Maximum inrush current | 0.5 A |
| | 1 A |
| Continuous load current | $\leq 1 \text{ A}$ |

Signal: POWER BOOST, active

| | |
|-------------------------|--|
| Output description | $I_{OUT} < I_N$: High signal |
| Switching voltage range | 18 V DC ... 24 V DC |
| Output voltage | + 48 V DC |
| Maximum inrush current | $\leq 20 \text{ mA}$ (short-circuit-proof) |
| Continuous load current | $\leq 20 \text{ mA}$ |

Connection data

Input

| | |
|---------------------------------------|---------------------|
| Connection method | Screw connection |
| Conductor cross-section, rigid min. | 0.2 mm ² |
| Conductor cross-section, rigid max. | 6 mm ² |
| Conductor cross-section flexible min. | 0.2 mm ² |
| Conductor cross-section flexible max. | 4 mm ² |
| Conductor cross-section AWG min. | 18 |

QUINT-PS/3AC/48DC/20 - Power supply



2320827

<https://www.phoenixcontact.com/us/products/2320827>

| | |
|----------------------------------|--------|
| Conductor cross-section AWG max. | 10 |
| Stripping length | 7 mm |
| Screw thread | M3 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

Output

| | |
|---------------------------------------|---------------------|
| Connection method | Screw connection |
| Conductor cross-section, rigid min. | 0.5 mm ² |
| Conductor cross-section, rigid max. | 16 mm ² |
| Conductor cross-section flexible min. | 0.5 mm ² |
| Conductor cross-section flexible max. | 16 mm ² |
| Conductor cross-section AWG min. | 8 |
| Conductor cross-section AWG max. | 6 |
| Stripping length | 10 mm |
| Screw thread | M3 |
| Tightening torque, min | 1.2 Nm |
| Tightening torque max | 1.5 Nm |

Signal

| | |
|---------------------------------------|---------------------|
| Connection method | Screw connection |
| Conductor cross-section, rigid min. | 0.2 mm ² |
| Conductor cross-section, rigid max. | 6 mm ² |
| Conductor cross-section flexible min. | 0.2 mm ² |
| Conductor cross-section flexible max. | 4 mm ² |
| Conductor cross-section AWG min. | 18 |
| Conductor cross-section AWG max. | 10 |
| Screw thread | M3 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

Signaling

| | |
|--------------------|-------------------------|
| Types of signaling | LED |
| | Active switching output |
| | Relay contact |

Signal output: DC OK active

| | |
|------------------------|---|
| Status display | $U_{OUT} > 0.9 \times U_N$: "DC OK" LED green |
| Note on status display | $U_{OUT} < 0.9 \times U_N$: Flashing "DC OK" LED |
| | $I_{OUT} < I_N$: LED ON |

Signal output: DC OK floating

| | |
|------------------------|---|
| Status display | $U_{OUT} > 0.9 \times U_N$: "DC OK" LED green |
| Note on status display | $U_{OUT} < 0.9 \times U_N$: Flashing "DC OK" LED |

Signal output: POWER BOOST, active

QUINT-PS/3AC/48DC/20 - Power supply



2320827

<https://www.phoenixcontact.com/us/products/2320827>

| | |
|----------------|--------------------------------------|
| Status display | $I_{OUT} > I_N$: LED "BOOST" yellow |
|----------------|--------------------------------------|

Electrical properties

| | |
|---------------------------------|-------------------------|
| Number of phases | 3 |
| Insulation voltage input/output | 4 kV AC (type test) |
| | 2 kV AC (routine test) |
| Insulation voltage output / PE | 500 V DC (routine test) |
| Insulation voltage input / PE | 3.5 kV AC (type test) |
| | 2 kV AC (routine test) |

Product properties

| | |
|----------------------------|--------------------|
| Product type | Power supply |
| Product family | QUINT POWER |
| MTBF (IEC 61709, SN 29500) | > 890000 h (25 °C) |
| | > 509000 h (40 °C) |

Insulation characteristics

| | |
|--------------------------------------|----------------------|
| Protection class | I |
| Overvoltage category (EN 61010-1) | II (≤ 5000 m) |
| Overvoltage category (EN 62477-1) | III (≤ 2000 m) |
| Overvoltage category (EN 61558-2-16) | II (≤ 5000 m) |
| Degree of pollution | 2 |

Dimensions

| | |
|--------|--------|
| Width | 96 mm |
| Height | 130 mm |
| Depth | 179 mm |

Installation dimensions

| | |
|----------------------------------|---------------|
| Installation distance right/left | 5 mm / 5 mm |
| Installation distance top/bottom | 50 mm / 50 mm |

Alternative assembly

| | |
|--------|--------|
| Width | 176 mm |
| Height | 130 mm |
| Depth | 99 mm |

Mounting

| | |
|-------------------------|---|
| Mounting type | DIN rail mounting |
| Assembly note | alignable: $P_N \geq 50\%$, 5 mm horizontally, 15 mm next to active components, 50 mm vertically alignable: $P_N < 50\%$, 0 mm horizontally, 40 mm vertically top, 20 mm vertically bottom |
| Mounting position | horizontal DIN rail NS 35, EN 60715 |
| With protective coating | no |

Material specifications

| | |
|------------------|--------------------------|
| Housing material | Metal |
| Housing material | Steel sheet, zinc-plated |
| Type of housing | Steel sheet, zinc-plated |

Environmental and real-life conditions

Ambient conditions

| | |
|--|--|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -25 °C ... 70 °C (> 60 °C Derating: 2,5 %/K) |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Ambient temperature (start-up type tested) | -40 °C |
| Maximum altitude | 5000 m |
| Climatic class | 3K3 (in acc. with EN 60721) |
| Max. permissible relative humidity (operation) | ≤ 95 % (at 25 °C, non-condensing) |
| Shock | 18 ms, 30g, in each space direction (according to IEC 60068-2-27) |
| Vibration (operation) | < 15 Hz, amplitude ±2.5 mm (according to IEC 60068-2-6) 15 Hz ... 150 Hz, 2.3g, 90 min. |
| Temp code | T4 (-25 ... +70 °C; > 60 °C, Derating: 2,5 %/K) |

Standards and regulations

| | |
|--|------------------------|
| Rail applications | EN 50121-4 |
| | EN 50121-3-2 |
| Standard – Limitation of mains harmonic currents | EN 61000-3-2 |
| Standard - Electrical safety | IEC 61010-2-201 (SELV) |
| Standard - Equipment safety | BG (design tested) |
| Standard - Approval for medical use | IEC 60601-1, 2 x MOOP |
| Standard – Protection against shock currents, basic requirements for protective separation in electrical equipment | EN 50178 |
| Standard – Safety extra-low voltage | IEC 61010-1 (SELV) |
| | IEC 61010-2-201 (PELV) |
| Standard - Safe isolation | IEC 61010-2-201 |
| Standard - safety for equipment for measurement, control, and laboratory use | IEC 61010-1 |
| Standard - Safety of transformers | IEC 61558-2-17 |

Approvals

| | |
|--------------|---|
| CSA | CAN/CSA-C22.2 No. 60950-1-07 |
| | CSA-C22.2 No. 107.1-01 |
| UL approvals | UL Listed UL 508 |
| | UL/C-UL Recognized UL 60950-1 (3-wire + PE, star net) |
| | UL 121201 & CSA C22.2 No. 213-17 Class I, Division 2, Groups A, B, C, D T4 (Hazardous Location) |

EMC data

| | |
|-------------------------------|---|
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU |
|-------------------------------|---|

QUINT-PS/3AC/48DC/20 - Power supply



2320827

<https://www.phoenixcontact.com/us/products/2320827>

| | |
|-------------------------------------|---|
| Low Voltage Directive | Conformance with Low Voltage Directive 2014/35/EC |
| EMC requirements for noise emission | EN 61000-6-3 |
| | EN 61000-6-4 |
| EMC requirements for noise immunity | EN 61000-6-1 |
| | EN 61000-6-2 |

Electrostatic discharge

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
|-----------------------|--------------|

Electrostatic discharge

| | |
|-------------------|----------------------|
| Contact discharge | 8 kV (Test Level 4) |
| Discharge in air | 15 kV (Test Level 4) |
| Comments | Criterion A |

Electromagnetic HF field

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-3 |
|-----------------------|--------------|

Electromagnetic HF field

| | |
|---------------------|-----------------------|
| Frequency range | 80 MHz ... 1 GHz |
| Test field strength | 20 V/m (Test Level 3) |
| Frequency range | 1 GHz ... 2 GHz |
| Test field strength | 10 V/m (Test Level 3) |
| Frequency range | 2 GHz ... 3 GHz |
| Test field strength | 10 V/m (Test Level 3) |
| Comments | Criterion A |

Fast transients (burst)

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-4 |
|-----------------------|--------------|

Fast transients (burst)

| | |
|----------|------------------------------------|
| Input | 4 kV (Test Level 4 - asymmetrical) |
| Output | 2 kV (Test Level 3 - asymmetrical) |
| Signal | 2 kV (Test Level 4 - asymmetrical) |
| Comments | Criterion A |

Surge voltage load (surge)

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-5 |
|-----------------------|--------------|

Surge voltage load (surge)

| | |
|----------|------------------------------------|
| Input | 2 kV (Test Level 3 - symmetrical) |
| | 6 kV (Test Level 4 - asymmetrical) |
| Output | 1 kV (Test Level 2 - symmetrical) |
| | 2 kV (Test Level 3 - asymmetrical) |
| Signal | 1 kV (Test Level 2 - asymmetrical) |
| Comments | Criterion A |

Conducted interference

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-6 |
|-----------------------|--------------|

QUINT-PS/3AC/48DC/20 - Power supply



2320827

<https://www.phoenixcontact.com/us/products/2320827>

Conducted interference

| | |
|---------------------|---------------------|
| Input/output/signal | asymmetrical |
| Frequency range | 0.15 MHz ... 80 MHz |
| Comments | Criterion A |
| Voltage | 10 V (Test Level 3) |

Criteria

| | |
|-------------|--|
| Criterion A | Normal operating behavior within the specified limits. |
| Criterion B | Temporary impairment to operational behavior that is corrected by the device itself. |


QUINT-PS/3AC/48DC/20 - Power supply



2320827

<https://www.phoenixcontact.com/us/products/2320827>

Drawings

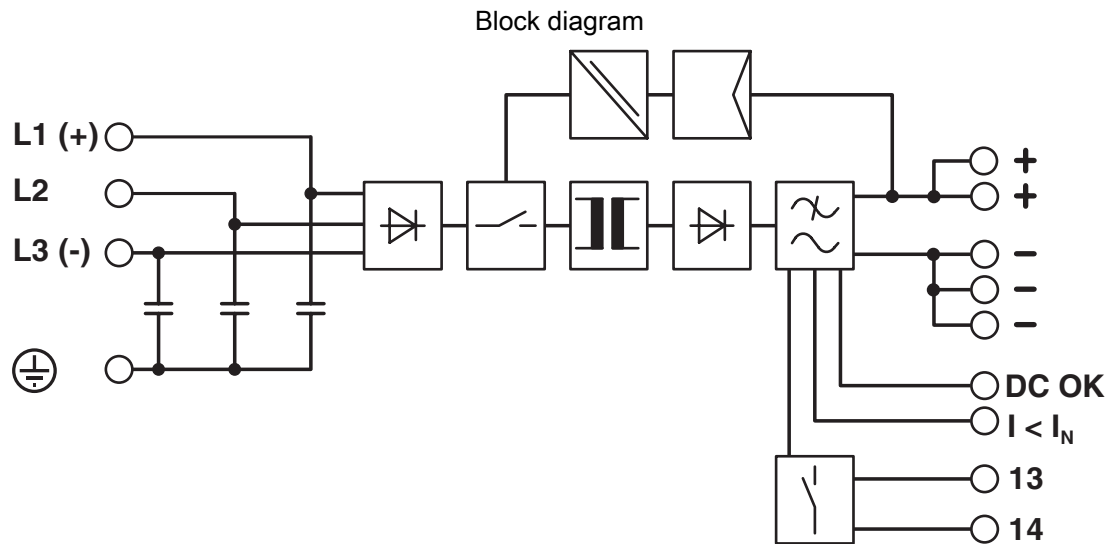

QUINT-PS/3AC/48DC/20 - Power supply



2320827

<https://www.phoenixcontact.com/us/products/2320827>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2320827>



cUL Recognized
Approval ID: E211944



UL Recognized
Approval ID: E211944



IECEE CB Scheme
Approval ID: SI-11221



EAC
Approval ID: RU S-DE.BL08.W.00764



IECEE CB Scheme
Approval ID: SI-11173



EAC
Approval ID: RU S-DE.BL08.W.00764



Type approved
Approval ID: 005-006



Type approved
Approval ID: SI-SIQ BG 005/113



IECEE CB Scheme
Approval ID: SI-11217



cCSAus
Approval ID: 80188288



cCSAus
Approval ID: 80187921

QUINT-PS/3AC/48DC/20 - Power supply



2320827

<https://www.phoenixcontact.com/us/products/2320827>



cULus Listed

Approval ID: E123528-20240627



cULus Listed

Approval ID: E199827-20240918

QUINT-PS/3AC/48DC/20 - Power supply



2320827

<https://www.phoenixcontact.com/us/products/2320827>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27040701 |
| ECLASS-15.0 | 27040701 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC002540 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121000 |
|-------------|----------|

2320827

<https://www.phoenixcontact.com/us/products/2320827>

Environmental product compliance

EU RoHS

| | |
|---|--------------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 7(a), 7(c)-I |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-25 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | b8a40412-89cf-4437-bab6-8bb3cb1925f6 |

EF3.1 Climate Change

| | |
|---------|-----------------|
| CO2e kg | 103.796 kg CO2e |
|---------|-----------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com