

# NLC-040-024D-04I-02QRD-05A - Base unit



2400079

<https://www.phoenixcontact.com/us/products/2400079>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



24 V DC Nanoline base unit. Equipped with 4 digital input and 2 relay output channels. Two inputs may be configured as analog inputs. Accepts one additional NLC-IOX... expansion unit. Onboard RJ11 connector provides programming and serial connectivity. Programming is via LOGIC+.

## Commercial data

Item number	2400079
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	*****
Product key	DRACAA
GTIN	4046356954471
Weight per piece (including packing)	172.6 g
Weight per piece (excluding packing)	166.9 g
Customs tariff number	85371098
Country of origin	IN

2400079

<https://www.phoenixcontact.com/us/products/2400079>

## Technical data

### Product properties

Product type	Base unit
Product family	Nanoline

### Electrical properties

#### Supply

Supply voltage	24 V DC (Power available to the I/O and Communications modules)
Supply voltage range	19.2 V DC ... 30 V DC
Power supply connection	Screw connection
Max. current consumption	81 mA
Typical current consumption	74 mA

### Input data

#### Analog:

Description of the input	Analog input
Number of inputs	2 (configurable)
Connection technology	Screw connection
Current input signal	0 mA ... 20 mA 4 mA ... 20 mA
Input resistance current input	500 $\Omega$
Voltage input signal	0 V DC ... 10 V DC
Input resistance of voltage input	200 k $\Omega$
A/D converter resolution	10 bit
Input filter	digital
Limit frequency (3 dB)	0.5 Hz (3 dB)
Measuring principle	Successive approximation
Protective circuit	Polarity reversal

#### Digital:

Input name	Digital inputs
Description of the input	PNP
Number of inputs	4
Connection method	Screw connection
Input voltage range "0" signal	0 V DC ... 5 V DC
Input voltage range "1" signal	11 V DC ... 30 V DC
Nominal input current at $U_{IN}$	1.2 mA (Channel 1 and 2) 0.13 mA (Channel 3 and 4)
Typical response time	10 $\mu$ s (Channel 1 and 2) 2 ms (Channel 3 and 4)

#### Counter:

# NLC-040-024D-04I-02QRD-05A - Base unit



2400079

<https://www.phoenixcontact.com/us/products/2400079>

Description of the input	High-speed counter
Number of inputs	2 (configurable)
Input frequency	10 kHz

## Output data

Digital:

Output name	Relay output
Output description	Relay output
Connection method	Screw connection
Number of outputs	2
Maximum output current per channel	5 A
Max. current carrying capacity per output	5 A
Maximum output current per module / terminal block	10 A
Maximum output current per module	10 A

## Connection data

Connection method	Screw connection
-------------------	------------------

## Interfaces

Operator Panel

Connection method	RJ45 / COMBICON
-------------------	-----------------


RS-232

Connection method	Slot 1
-------------------	--------

USB

Connection method	Slot 1
-------------------	--------

## Dimensions

Dimensional drawing	
Width	40 mm
Height	103.5 mm
Depth	43 mm

## Material specifications

Color	white
-------	-------

## Environmental and real-life conditions

Ambient conditions

# NLC-040-024D-04I-02QRD-05A - Base unit



2400079

<https://www.phoenixcontact.com/us/products/2400079>

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	90 %
Permissible humidity (storage/transport)	90 %

## Mounting

Mounting type	DIN rail mounting
---------------	-------------------

# NLC-040-024D-04I-02QRD-05A - Base unit




2400079

<https://www.phoenixcontact.com/us/products/2400079>

## Drawings

Dimensional drawing

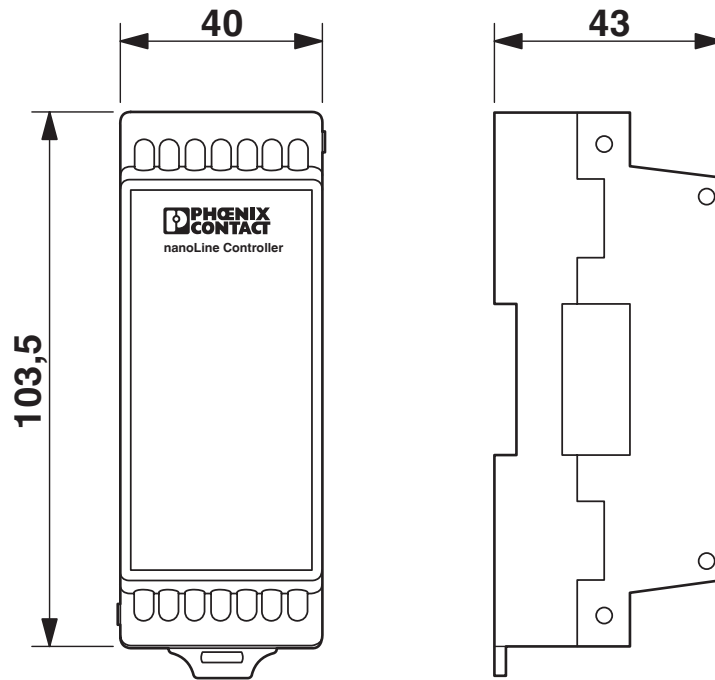

# NLC-040-024D-04I-02QRD-05A - Base unit



2400079

<https://www.phoenixcontact.com/us/products/2400079>

## Environmental product compliance

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)