

# PSI-WL-RS232-RS485/BT - Bluetooth converter



2708517

<https://www.phoenixcontact.com/us/products/2708517>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Bluetooth converter for the wireless transmission of RS-232, RS-422 and RS-485 interfaces. Mounting on EN DIN rail. MCX connection for external antenna. Supply 24 V AC/DC.

## Commercial data

Item number	2708517
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	NULL
Product key	DNC661
GTIN	4017918974169
Weight per piece (including packing)	206.3 g
Weight per piece (excluding packing)	212.3 g
Customs tariff number	85176200
Country of origin	SE

## Technical data

### Product properties

Product type	Interface converter
--------------	---------------------

### Electrical properties

Electrical isolation	VCC // Bluetooth, RS-232, RS-422, RS-485, USB
Test voltage data interfaces	1.5 kV AC

### Supply

Supply voltage range	10 V DC ... 30 V DC (via pluggable COMBICON screw terminal block)
	19 V AC ... 29 V AC (via pluggable COMBICON screw terminal block)
Nominal supply voltage	24 V AC $\pm 20$ % (via pluggable COMBICON screw terminal block)
	24 V DC $\pm 20$ % (as an alternative or redundant, via backplane bus contact and system current supply)
Typical current consumption	$\leq 100$ mA (24 V DC)

### Interfaces

Signal	RS-485
--------	--------

Data: V.24 (RS-232) interface in acc. with ITU-T V.28, EIA/TIA-232, DIN 66259-1

Serial transmission speed	0.3; 1.2; 2.4; 4.8; 7.2; 9.6; 19.2; 31.25; 38.4; 57.6; 75; 93.75; 115.2 kbps
Connection method	D-SUB 9 plug
Transmission length	max. 15 m
File format/coding	Serial asynchronous UART/NRZ, 7/8 data, 1/2 stop, 1 parity, 10/11-bit character length
Data flow control/protocols	Software handshake, Xon/Xoff, or hardware handshake RTS/CTS, 3964 compatible

Data: RS-422 interface in acc. with ITU-T V.11, EIA/TIA-422, DIN 66348-1

Serial transmission speed	0.3; 1.2; 2.4; 4.8; 7.2; 9.6; 19.2; 31.25; 38.4; 57.6; 75; 93.75; 115.2; 136; 187.5 kbps
Transmission length	max. 1200 m
Termination resistor	390 $\Omega$ (configurable)
	180 $\Omega$
	390 $\Omega$

Data: RS-485 interface, in acc. with EIA/TIA-485, DIN 66259-4/RS-485 2-wire

Serial transmission speed	0.3; 1.2; 2.4; 4.8; 7.2; 9.6; 19.2; 31.25; 38.4; 57.6; 75; 93.75; 115.2; 136; 187.5 kbps
Connection method	Pluggable screw connection
Transmission length	max. 1200 m
Termination resistor	390 $\Omega$ (configurable)
	180 $\Omega$
	390 $\Omega$

# PSI-WL-RS232-RS485/BT - Bluetooth converter



2708517

<https://www.phoenixcontact.com/us/products/2708517>

## Wireless

Interface description	Bluetooth 2.0
Frequency range	2.402 GHz ... 2.48 GHz (ISM bandwidth)
Transmission method	1.6 kHz (FHSS)
Transmit capacity, minimum	-28 dBm (can be set via software)
Transmit capacity, maximum	20 dBm (can be set via software)
Minimum receiver sensitivity	-83 dBm
Antenna	External
Connection method	MCX socket
Range	20 dBm (100 mW) = 80 m ... 150 m
Bluetooth Multidrop master/slave	1/7

## Dimensions

Width	22.5 mm
Height	99 mm
Depth	116 mm

## Material specifications

Color (Housing)	green (RAL 6021)
Material (Housing)	PA 6.6-FR

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 60 °C

## EMC data

Electromagnetic compatibility	Conformance with R&TTE directive 1999/5/EC
Noise immunity	EN 61000-6-2:2005

### Noise emission

Standards/regulations	EN 55011
-----------------------	----------

## Mounting

Mounting type	DIN rail mounting
---------------	-------------------


# PSI-WL-RS232-RS485/BT - Bluetooth converter

2708517

<https://www.phoenixcontact.com/us/products/2708517>

## Drawings

### Functional drawing

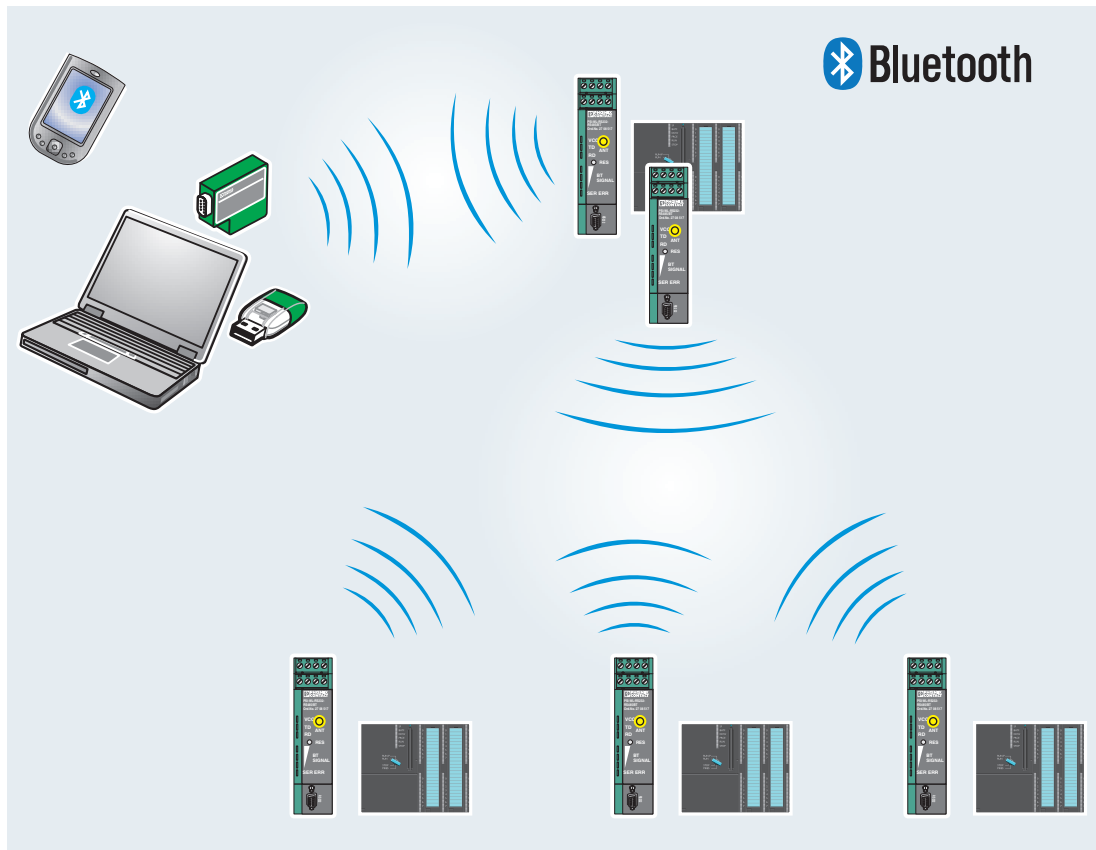

# PSI-WL-RS232-RS485/BT - Bluetooth converter



2708517

<https://www.phoenixcontact.com/us/products/2708517>

## Environmental product compliance

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)