

MACX MCR-UI-UI - Input signal conditioner



2811284

<https://www.phoenixcontact.com/us/products/2811284>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Configurable 3-way isolating amplifier with safe electrical isolation, 24 V, power bridging. DIP switches on the front, over 1600 signal conversions can be set. Order configuration, screw connection, SIL.

Your advantages

- Power supply possible via DIN rail connector
- Over 1600 signal conversions can be set via DIP switches on the front
- Installation in zone 2 permitted
- Up to SIL 2 in accordance with EN 61508
- Configurable input and output signals, including bipolar current and voltage signals
- 3-way electrical isolation
- 10 kHz limit frequency for time-critical applications
- Analog signal conditioner for isolating, filtering, amplifying, and converting standard analog signals
- Plug-in screw or spring-cage connection technology (Push-in technology)
- Active or passive output
- Status indicator for supply voltage

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 2811284 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | C490 |
| Product key | DK1111 |
| Weight per piece (including packing) | 183 g |
| Weight per piece (excluding packing) | 160.1 g |
| Customs tariff number | 85437090 |
| Country of origin | DE |

MACX MCR-UI-UI - Input signal conditioner



2811284

<https://www.phoenixcontact.com/us/products/2811284>

Technical data

Product properties

| | |
|-----------------|--------------------------|
| Product type | Input signal conditioner |
| Product family | MACX Analog |
| No. of channels | 1 |
| Configuration | DIP switches |

System properties

Functionality

| | |
|---------------|--------------|
| Configuration | DIP switches |
|---------------|--------------|

Electrical properties

| | |
|---|---|
| Alignment span | $\pm 4 \%$ |
| Alignment zero | $\pm 4 \%$ |
| Electrical isolation between input and output | yes |
| Limit frequency (3 dB) | 10 kHz (Can be switched to 30 Hz) |
| Protective circuit | Transient protection |
| Step response (10-90%) | 35 μ s (10 kHz) 11 ms (30 Hz) |
| Maximum temperature coefficient | 0.0075 %/K |
| Maximum transmission error | $\leq 0.1 \%$ (Compared to the final value) |

Electrical isolation

| | |
|----------------------|-------------------------|
| Test voltage | 2.5 kV AC (50 Hz, 60 s) |
| Overvoltage category | II |
| Pollution degree | 2 |

Electrical isolation Input/output/power supply IEC/EN 61010-1

| | |
|--------------------------|----------------------|
| Standards/regulations | IEC/EN 61010-1 |
| Rated insulation voltage | 300 V _{rms} |
| Insulation | Safe isolation |

Electrical isolation Input/output/power supply IEC/EN 60079-7

| | |
|--------------------------|----------------|
| Standards/regulations | IEC/EN 60079-7 |
| Rated insulation voltage | 250 V AC/DC |

Supply

| | |
|------------------------------|-------------------------------------|
| Nominal supply voltage range | 12 V DC ... 24 V DC -20 % ... +25 % |
| Supply voltage range | 9.6 V DC ... 30 V DC |
| Power dissipation | 500 mW (24 V DC / 20 mA) |
| Power consumption | ≤ 700 mW |

Input data

MACX MCR-UI-UI - Input signal conditioner



2811284

<https://www.phoenixcontact.com/us/products/2811284>

Signal: Voltage/current

| | |
|----------------------|--|
| Number of inputs | 1 |
| Voltage input signal | 0 mV ... 50 mV |
| | 0 mV ... 60 mV |
| | 0 mV ... 75 mV |
| | 0 mV ... 100 mV |
| | 0 mV ... 120 mV |
| | 0 mV ... 150 mV |
| | 0 mV ... 200 mV |
| | 0 mV ... 300 mV |
| | 0 mV ... 500 mV |
| | 0 V ... 1 V |
| | 0 V ... 1.5 V |
| | 0 V ... 2 V |
| | 0 V ... 3 V |
| | 0 V ... 5 V |
| | 0 V ... 10 V (Configurable via DIP switches) |
| | 0 V ... 15 V |
| | 0 V ... 20 V |
| | 0 V ... 30 V |
| | 0 V ... 50 V |
| | 0 V ... 100 V |
| | -50 mV ... 50 mV |
| | -60 mV ... 60 mV |
| | -75 mV ... 75 mV |
| | -100 mV ... 100 mV |
| | -120 mV ... 120 mV |
| | -150 mV ... 150 mV |
| | -200 mV ... 200 mV |
| | -300 mV ... 300 mV |
| | -500 mV ... 500 mV |
| | -1 V ... 1 V |
| | -1.5 V ... 1.5 V |
| | -2 V ... 2 V |
| | -3 V ... 3 V |
| | -5 V ... 5 V |
| | -10 V ... 10 V |
| | -15 V ... 15 V |
| | -20 V ... 20 V |
| | -30 V ... 30 V |
| | -50 V ... 50 V |
| | -100 V ... 100 V |
| 1 V ... 5 V | |

MACX MCR-UI-UI - Input signal conditioner



2811284

<https://www.phoenixcontact.com/us/products/2811284>

| | |
|-----------------------------------|---|
| | 2 V ... 10 V |
| Min. voltage input signal | ± 50 mV |
| Max. voltage input signal | ± 100 V |
| Current input signal | 0 mA ... 1 mA (Configurable via DIP switches) |
| | 0 mA ... 1.5 mA |
| | 0 mA ... 2 mA |
| | 0 mA ... 3 mA |
| | 0 mA ... 5 mA |
| | 0 mA ... 10 mA |
| | 0 mA ... 15 mA |
| | 0 mA ... 20 mA |
| | 0 mA ... 30 mA |
| | 0 mA ... 50 mA |
| | 0 mA ... 100 mA |
| | -1 mA ... 1 mA |
| | -1.5 mA ... 1.5 mA |
| | -2 mA ... 2 mA |
| | -3 mA ... 3 mA |
| | -5 mA ... 5 mA |
| | -10 mA ... 10 mA |
| | -15 mA ... 15 mA |
| | -20 mA ... 20 mA |
| | -30 mA ... 30 mA |
| | -50 mA ... 50 mA |
| | -100 mA ... 100 mA |
| | 1 mA ... 5 mA |
| | 2 mA ... 10 mA |
| | 4 mA ... 20 mA |
| Minimum current input signal | ± 1 mA |
| Max. current input signal | ± 100 mA |
| Input resistance of voltage input | ~ 1 MΩ (±1 V DC ... ±100 V DC) |
| Input resistance current input | ~ 10 Ω (±10 mA DC ... ±100 mA DC) |

Output data

Signal: Voltage/current

| | |
|---------------------------|--|
| Number of outputs | 1 |
| Configurable/programmable | Yes, can be switched |
| Voltage output signal | 0 V ... 10 V (Configurable via DIP switches) |
| | 0 V ... 5 V |
| | 2 V ... 10 V |
| | 1 V ... 5 V |
| | -10 V ... 10 V |
| | -5 V ... 5 V |

MACX MCR-UI-UI - Input signal conditioner



2811284

<https://www.phoenixcontact.com/us/products/2811284>

| | |
|---------------------------------|---|
| | 0 V ... 2.5 V |
| | 0.5 V ... 2.5 V |
| | -2.5 V ... 2.5 V |
| Output signal voltage inverse | 0 V ... 2.5 V |
| | 0 V ... 5 V |
| | 0 V ... 10 V |
| Current output signal | 0 mA ... 5 mA |
| | 0 mA ... 10 mA |
| | 0 mA ... 20 mA (Configurable via DIP switches) |
| | 1 mA ... 5 mA |
| | 2 mA ... 10 mA |
| | 4 mA ... 20 mA |
| | -5 mA ... 5 mA |
| | -10 mA ... 10 mA |
| | -20 mA ... 20 mA |
| Output signal current inverse | 0 mA ... 5 mA |
| | 0 mA ... 10 mA |
| | 0 mA ... 20 mA |
| Load/output load voltage output | $\geq 1 \text{ k}\Omega$ (10 V) |
| Load/output load current output | $\leq 600 \Omega$ (20 mA; active) |
| | passive: $\leq (U_B - 2 \text{ V}) / I_{\text{outmax}}$ |
| Ripple | $< 10 \text{ mV}_{\text{rms}}$ |

Connection data

| | |
|----------------------------------|---|
| Connection method | Screw connection |
| Stripping length | 7 mm |
| Screw thread | M3 |
| Conductor cross-section rigid | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross-section flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross-section AWG | 24 ... 14 |
| Tightening torque | 0.5 Nm ... 0.6 Nm |

Test socket

| | |
|---------------|------|
| Max. diameter | 2 mm |
|---------------|------|

Ex data

| | |
|-----------------------|--------|
| Ex installation (EPL) | Gc |
| | Div. 2 |


Dimensions

MACX MCR-UI-UI - Input signal conditioner



2811284

<https://www.phoenixcontact.com/us/products/2811284>
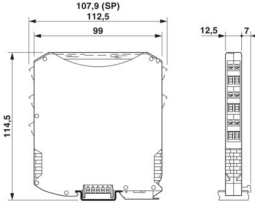
| | |
|---------------------|--|
| Dimensional drawing |  |
| Width | 12.5 mm |
| Height | 112.5 mm |
| Depth | 113.7 mm |
| Depth NS 35/7,5 | 114.5 mm (Snapped onto DIN rail NS 35/7,5 in accordance with EN 60715) |

Material specifications

| | |
|------------------|-----------------|
| Color | gray (RAL 7042) |
| Housing material | PA 6.6-FR |

Characteristics

Safety data: IEC 61508 - High demand

| | |
|------------------------------|---|
| Safety Integrity Level (SIL) | 2 |
|------------------------------|---|

Safety data: IEC 61508 - High demand

| | |
|------------------------------|---|
| Safety Integrity Level (SIL) | 2 |
|------------------------------|---|

Safety data: IEC 61508 - Low demand

| | |
|------------------------------|---|
| Safety Integrity Level (SIL) | 2 |
|------------------------------|---|

Safety data: IEC 61508 - Low demand

| | |
|------------------------------|---|
| Safety Integrity Level (SIL) | 2 |
|------------------------------|---|

Environmental and real-life conditions

Ambient conditions

| | |
|---|---------------------------|
| Degree of protection | IP20 (not assessed by UL) |
| Ambient temperature (operation) | -20 °C ... 70 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |

Altitude range (≤ 2000 m)

| | |
|---------------------------------|---|
| Altitude | ≤ 2000 m (The technical data refers to altitudes ≤ 2000 m above mean sea level. For altitudes >2000 m above mean sea level, refer to the data sheet.) |
| Ambient temperature (operation) | -20 °C ... 70 °C |

Altitude range (≤ 3000 m)

| | |
|---------------------------------|-------------------------|
| Height range | > 2000 m ... 3000 m |
| Ambient temperature (operation) | -20 °C ... 60 °C |
| Rated insulation voltage | 190 V |

MACX MCR-UI-UI - Input signal conditioner



2811284

<https://www.phoenixcontact.com/us/products/2811284>

Altitude range (≤ 4000 m)

| | |
|---------------------------------|---------------------|
| Height range | > 3000 m ... 4000 m |
| Ambient temperature (operation) | -20 °C ... 55 °C |
| Rated insulation voltage | 63 V |

Altitude range (≤ 5000 m)

| | |
|---------------------------------|---------------------|
| Height range | > 4000 m ... 5000 m |
| Ambient temperature (operation) | -20 °C ... 45 °C |
| Rated insulation voltage | 63 V |

Approvals

CE

| | |
|-------------|--------------|
| Certificate | CE-compliant |
|-------------|--------------|

ATEX

| | |
|----------------|--------------------------|
| Identification | Ⓜ II 3 G Ex ec IIC T4 Gc |
| Certificate | BVS 10 ATEX E 059 X |

UKCA Ex (UKEX)

| | |
|----------------|--------------------------|
| Identification | Ⓜ II 3 G Ex ec IIC T4 Gc |
| Certificate | PxCIF21UKEX2811284X |

IECEX

| | |
|----------------|--------------------|
| Identification | Ex ec IIC T4 Gc |
| Certificate | IECEX BVS 10.0044X |

CCC / China-Ex

| | |
|----------------|------------------|
| Identification | Ex ec IIC T4 Gc |
| Certificate | 2021122304114077 |

UL, USA/Canada

| | |
|----------------|---------------------------------------|
| Identification | UL 61010 Listed |
| | Class I, Div. 2, Groups A, B, C, D T6 |
| | Class I, Zone 2, Group IIC |

Shipbuilding approval

| | |
|-------------|-------------------|
| Certificate | DNV GL TAA000020C |
|-------------|-------------------|

Safety Integrity Level (SIL, IEC 61508)

| | |
|----------------|---|
| Identification | 2 |
|----------------|---|

INMETRO

| | |
|----------------|-----------------|
| Identification | Ex ec IIC T4 Gc |
| Certificate | DNV 21.0063 X |

Shipbuilding data

| | |
|-------------|---|
| Temperature | B |
| Humidity | B |

MACX MCR-UI-UI - Input signal conditioner



2811284

<https://www.phoenixcontact.com/us/products/2811284>

| | |
|-----------|---|
| Vibration | A |
| EMC | A |
| Enclosure | Required protection according to the Rules shall be provided upon installation on board |

EMC data

| | |
|-------------------------------|--|
| Electromagnetic compatibility | Conformance with EMC directive |
| Noise immunity | EN 61000-6-2 |
| Note | When being exposed to interference, there may be minimal deviations. |

Noise emission

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-6-4 |
|-----------------------|--------------|

Electromagnetic HF field

| | |
|--|--------------------------|
| Designation | Electromagnetic RF field |
| Standards/regulations | EN 61000-4-3 |
| Typical deviation from the measuring range final value | 1 % |

Fast transients (burst)

| | |
|--|-------------------------|
| Designation | Fast transients (burst) |
| Standards/regulations | EN 61000-4-4 |
| Typical deviation from the measuring range final value | 1 % |

Conducted interference

| | |
|--|-------------------------|
| Designation | Conducted interferences |
| Standards/regulations | EN 61000-4-6 |
| Typical deviation from the measuring range final value | 1 % |

Standards and regulations

GB Standard

| | |
|-----------------------|-------------|
| Standards/regulations | GB/T 3836.1 |
| | GB/T 3836.3 |

Mounting

| | |
|-------------------|-------------------|
| Mounting type | DIN rail mounting |
| Mounting position | any |

MACX MCR-UI-UI - Input signal conditioner

2811284

<https://www.phoenixcontact.com/us/products/2811284>



Drawings

Dimensional drawing




MACX MCR-UI-UI - Input signal conditioner



2811284

<https://www.phoenixcontact.com/us/products/2811284>

Block diagram

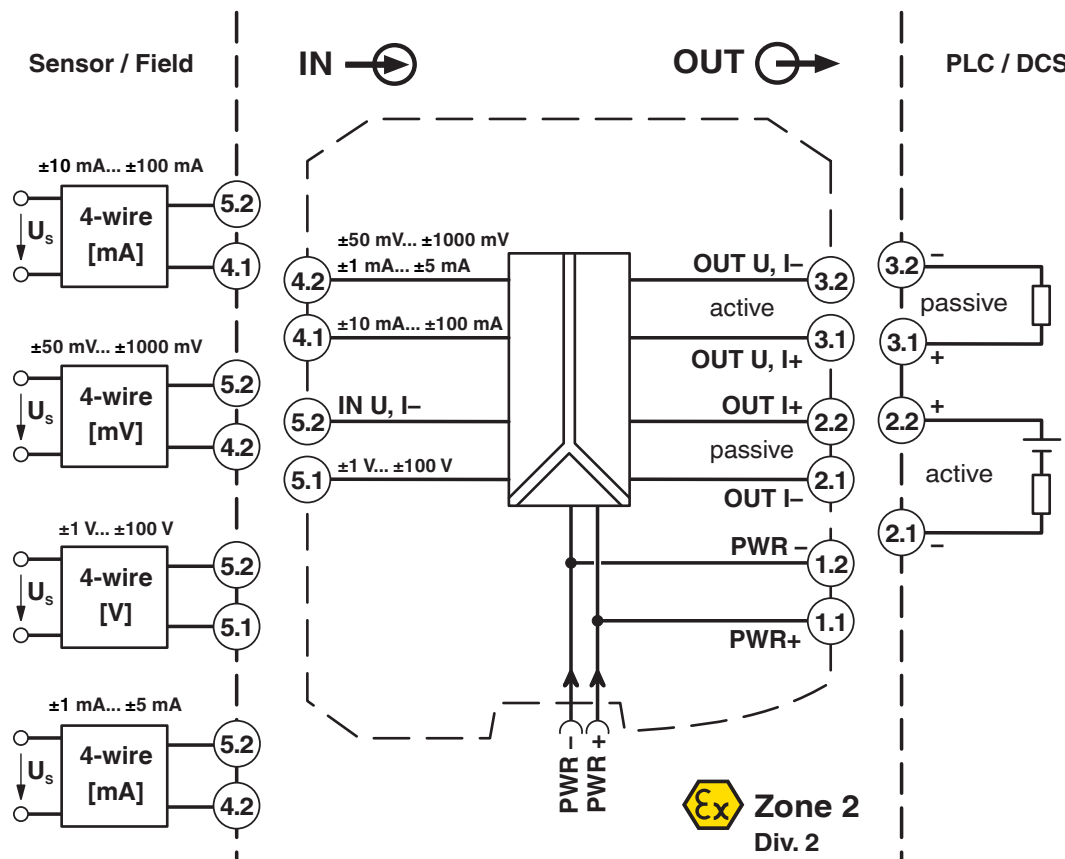

MACX MCR-UI-UI - Input signal conditioner



2811284

<https://www.phoenixcontact.com/us/products/2811284>

Classifications

ECLASS

ECLASS-13.0

27210120

ETIM

ETIM 9.0

EC002653

UNSPSC

UNSPSC 21.0

39121000

MACX MCR-UI-UI - Input signal conditioner



2811284

<https://www.phoenixcontact.com/us/products/2811284>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c), 7(a), 7(c)-I |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|----------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
|-------------------------------------|----------------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com