

# MINI-PS-100-240AC/10-15DC/8 - Power supply



2866297

<https://www.phoenixcontact.com/us/products/2866297>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Please use the following item in new systems: 2904607  
Primary-switched MINI POWER power supply for DIN rail mounting, input: 1-phase, output: 10 V DC ... 15 V DC/8 A

## Product description

MINI POWER power supplies for MCR technology

In measurement and control technology (MCR), modular electronics housing has become the industry standard. MINI POWER is the power supply unit to go with it. The devices are flexible, thanks to special voltages and special versions.

## Your advantages

- Easy-maintenance connection technology thanks to keyed COMBICON connectors
- Remote monitoring of output voltage via switching output

## Commercial data

Item number	2866297
Packing unit	1 pc
Sales key	CM11
Product key	CMPM12
GTIN	4017918975036
Weight per piece (including packing)	574.7 g
Weight per piece (excluding packing)	561 g
Customs tariff number	85044095
Country of origin	CN

## Technical data

### Input data

#### AC operation

Nominal input voltage range	100 V AC ... 240 V AC
Input voltage range	85 V AC ... 264 V AC
	90 V DC ... 350 V DC
Input voltage range AC	85 V AC ... 264 V AC
Input voltage range DC	90 V DC ... 350 V DC
Voltage type of supply voltage	AC/DC
Inrush current	< 15 A (typical)
Inrush current integral ( $I^2t$ )	2.1 A <sup>2</sup> s
AC frequency range	45 Hz ... 65 Hz
Mains buffering time	> 20 ms (120 V AC)
	> 20 ms (230 V AC)
Current consumption	1.3 A (120 V AC)
	0.8 A (230 V AC)
	1.3 A (90 V DC)
	0.4 A (350 V DC)
Nominal power consumption	109.1 W
Typical response time	< 0.4 s
Input fuse	3.15 A (slow-blow, internal)
Permissible backup fuse	B6 B10 B16
Recommended breaker for input protection	6 A ... 16 A

### Output data

Efficiency	> 88 % (for 230 V AC and nominal values)
Output characteristic	U/I
Nominal output voltage	12 V DC $\pm$ 1 %
	10 V DC $\pm$ 1 %
	15 V DC $\pm$ 1 %
Setting range of the output voltage ( $U_{Set}$ )	10 V DC ... 15 V DC (> 12 V DC, constant capacity restricted)
Nominal output current ( $I_N$ )	8 A (-25 °C ... 60 °C)
POWER BOOST ( $I_{Boost}$ )	6.6 A (-25 °C ... 40 °C permanent)
Derating	60 °C ... 70 °C (2.5 %/K)
Residual ripple	< 40 mV <sub>PP</sub> (20 MHz)
Output power	100 W
Peak switching voltages nominal load	< 100 mV <sub>PP</sub> (20 MHz)
Maximum no-load power dissipation	< 2.5 W
Power loss nominal load max.	< 12 W
Connection in parallel	yes, for assembling redundant systems and increasing efficiency
Connection in series	yes

# MINI-PS-100-240AC/10-15DC/8 - Power supply



2866297

<https://www.phoenixcontact.com/us/products/2866297>

Signal: DC OK active

Output description	$U_{OUT} > 9\text{ V}$ : High signal
Maximum switching voltage	$\leq 12\text{ V}$
Output voltage	+ 12 V (Signal)
Continuous load current	$\leq 20\text{ mA}$

## Connection data

### Input

Connection method	Pluggable screw connection
Conductor cross-section, rigid min.	0.2 mm <sup>2</sup>
Conductor cross-section, rigid max.	2.5 mm <sup>2</sup>
Conductor cross-section flexible min.	0.2 mm <sup>2</sup>
Conductor cross-section flexible max.	2.5 mm <sup>2</sup>
Conductor cross-section AWG min.	24
Conductor cross-section AWG max.	12
Stripping length	7 mm
Screw thread	M3

### Output

Connection method	Pluggable screw connection
Conductor cross-section, rigid min.	0.2 mm <sup>2</sup>
Conductor cross-section, rigid max.	2.5 mm <sup>2</sup>
Conductor cross-section flexible min.	0.2 mm <sup>2</sup>
Conductor cross-section flexible max.	2.5 mm <sup>2</sup>
Conductor cross-section AWG min.	24
Conductor cross-section AWG max.	12
Stripping length	7 mm
Screw thread	M3

### Signal

Conductor cross-section, rigid min.	0.2 mm <sup>2</sup>
Conductor cross-section, rigid max.	2.5 mm <sup>2</sup>
Conductor cross-section flexible min.	0.2 mm <sup>2</sup>
Conductor cross-section flexible max.	2.5 mm <sup>2</sup>
Conductor cross-section AWG min.	24
Conductor cross-section AWG max.	12
Screw thread	M3

## Signaling

Types of signaling	LED
	Active switching output
Operating voltage display	Green LED

Signal output: DC OK active

# MINI-PS-100-240AC/10-15DC/8 - Power supply



2866297

<https://www.phoenixcontact.com/us/products/2866297>

Status display	"DC OK" LED green
----------------	-------------------

## Electrical properties

Insulation voltage input/output	3 kV (type test)
	3 kV (routine test)

## Product properties

Product type	Power supply
Product family	MINI POWER
MTBF (IEC 61709, SN 29500)	> 984000 h (40 °C)

## Insulation characteristics

Protection class	II (in closed control cabinet)
Overvoltage category	III

## Dimensions

Width	67.5 mm
Height	99 mm
Depth	107 mm

## Installation dimensions

Installation distance right/left	0 mm / 0 mm
Installation distance top/bottom	50 mm / 50 mm

## Mounting

Mounting type	DIN rail mounting
Assembly note	alignable: horizontally 0 mm, vertically 50 mm
Mounting position	horizontal DIN rail NS 35, EN 60715
With protective coating	no

## Material specifications

Housing material	Plastic
Type of housing	Polyamide PA, color: green

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C (> 60 °C Derating: 2,5 %/K)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Max. permissible relative humidity (operation)	≤ 95 % (at 25 °C, non-condensing)
Temp code	T3C ≤ 70 °C

## Standards and regulations

Rail applications	EN 50121-4
Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations	EN 50178/VDE 0160 (PELV)

# MINI-PS-100-240AC/10-15DC/8 - Power supply



2866297

<https://www.phoenixcontact.com/us/products/2866297>

Standard – Limitation of mains harmonic currents	EN 61000-3-2
Standard - Electrical safety	EN 60950-1/VDE 0805 (SELV)
Standard – Safety extra-low voltage	EN 60950-1 (SELV)
	EN 60204 (PELV)
Standard - Safe isolation	DIN VDE 0100-410

## Approvals

UL approvals	UL/C-UL listed UL 508
	UL/C-UL Recognized UL 60950-1
	UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D (Hazardous Location)

## Conformity/Approvals

SIL in accordance with IEC 61508	0
----------------------------------	---

## EMC data


Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Low Voltage Directive	Conformance with Low Voltage Directive 2014/35/EC
EMC requirements for noise emission	EN 61000-6-3
	EN 61000-6-4
EMC requirements for noise immunity	EN 61000-6-1
	EN 61000-6-2

## Noise emission

Standards/regulations	EN 55011 (EN 55022)
-----------------------	---------------------

Drawings

Diagram

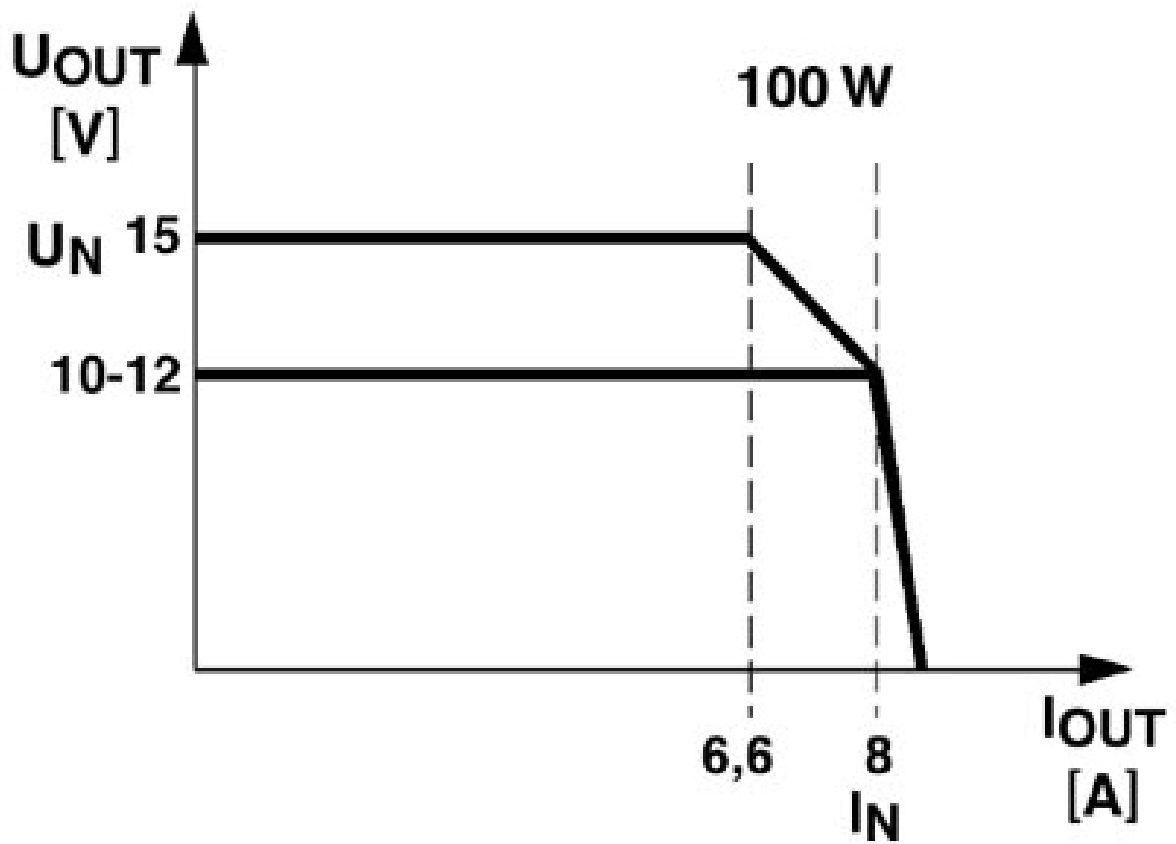

Output characteristic curve


# MINI-PS-100-240AC/10-15DC/8 - Power supply



2866297

<https://www.phoenixcontact.com/us/products/2866297>

Block diagram

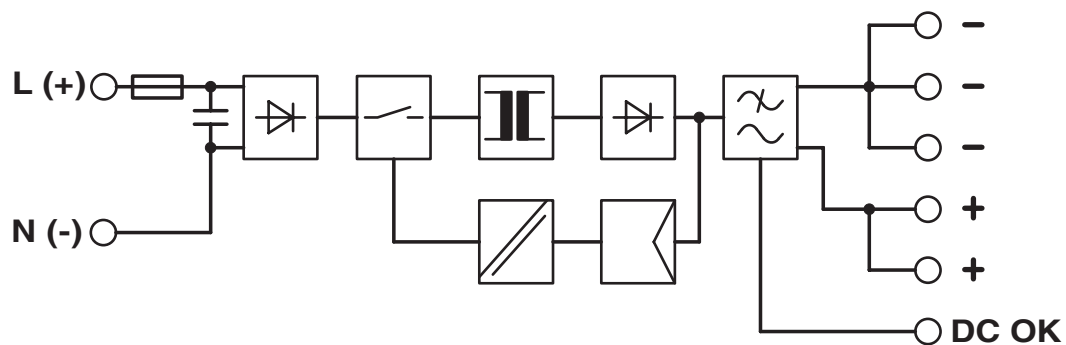

# MINI-PS-100-240AC/10-15DC/8 - Power supply



2866297

<https://www.phoenixcontact.com/us/products/2866297>

## Classifications

### UNSPSC

UNSPSC 21.0	39121000
-------------	----------

2866297

<https://www.phoenixcontact.com/us/products/2866297>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-25
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	5ed778d8-7afe-488c-bb03-ed259f2a54e0

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)