

IB IL AI 4/EF-2MBD - Inline terminal



2878544

<https://www.phoenixcontact.com/us/products/2878544>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



The figure shows the PAC version of the product

Inline analog input terminal with differential input channels, transmission speed 2 Mbaud, 4 inputs, 0-20 mA, 4-20 mA, ± 20 mA, 0-10 V, ± 10 V, 0-5 V, ± 5 V, 2, 3 or 4-conductor connection method

Product description

The terminal is designed for use within an Inline station. It is used to acquire analog voltage and current signals.

Your advantages

- 4 differential signal inputs
- Connection of sensors in 2-, 3-, and 4-conductor technology
- Current ranges: 0 mA ... 20 mA, 4 mA ... 20 mA, ± 20 mA
- Voltage ranges: 0 V ... 10 V, ± 10 V, 0 V ... 5 V, ± 5 V
- Short-circuit
- Diagnostic and status indicators
- Bus-synchronous provision of input values with very low jitter ($< 10 \mu\text{s}$)
- Measured value acquisition with 16-bit resolution

Commercial data

Item number	2878544
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	NULL
Product key	DRI141
GTIN	4017918996390
Weight per piece (including packing)	159.9 g
Weight per piece (excluding packing)	132.91 g
Customs tariff number	85389091
Country of origin	DE

2878544

<https://www.phoenixcontact.com/us/products/2878544>

Technical data

Product properties

Type	modular
	Inline

System properties

Programming data

Length code (hex)	05
ID code (dec.)	223
Length code (dec)	05
Input address area	10 Byte
Output address area	10 Byte
Parameter channel (PCP)	2 Byte
Register length (bus)	96 bit

Fieldbus data telegram

Required parameter data	28 Byte
Required configuration data	4 Byte

Electrical properties

Potentials: Communications power (U_L)

Supply voltage	7.5 V DC (via voltage jumper)
Current draw	max. 110 mA
	typ. 110 mA

Potentials: Supply of analog modules (U_{ANA})

Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 20 mA
	typ. 13 mA

Potentials: Main circuit supply (U_M)

Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 200 mA

Electrical isolation/isolation of the voltage ranges

Test voltage: 5 V supply, incoming remote bus/7.5 V supply (bus logics)	500 V AC, 50 Hz, 1 min
Test voltage: 5 V supply, outgoing remote bus/7.5 V supply (bus logics)	500 V AC, 50 Hz, 1 min
Test voltage: 7.5 V supply (bus logic), 24 V supply U_{ANA} / I/O	500 V AC, 50 Hz, 1 min
Test voltage: 7.5 V supply (bus logic), 24 V supply U_{ANA} / functional ground	500 V AC, 50 Hz, 1 min

IB IL AI 4/EF-2MBD - Inline terminal



2878544

<https://www.phoenixcontact.com/us/products/2878544>

Test voltage: I/O/functional ground	500 V AC, 50 Hz, 1 min
-------------------------------------	------------------------

Input data

Analog: General

Input name	Analog inputs
Description of the input	Differential input, including sensor supply (24 V DC)
Number of inputs	max. 4
A/D conversion time	max. 10 µs
Connection method	Inline shield connector
Connection technology	2-, 3-, 4-conductor (shielded)
Current input signal	0 mA ... 20 mA 4 mA ... 20 mA -20 mA ... 20 mA
Voltage input signal	0 V ... 5 V -5 V ... 5 V 0 V ... 10 V -10 V ... 10 V
Data formats	IB IL, IB ST, standardized representation, S7 compatible
Limit frequency (3 dB)	500 Hz
Measured value resolution	16 bits (15 bits + sign bit)
Protective circuit	Transient protection; Yes, via arresters

Analog: Voltage inputs

Number of inputs	4 (differential inputs, voltage)
Voltage input signal	0 V ... 5 V -5 V ... 5 V 0 V ... 10 V -10 V ... 10 V
Input resistance of voltage input	300 kΩ
A/D converter resolution	15 bit
Measured value resolution	16 bits (15 bits + sign bit)

Analog: Current inputs

Number of inputs	4 (Differential inputs, current)
Current input signal	0 mA ... 20 mA 4 mA ... 20 mA -20 mA ... 20 mA
Input resistance current input	approx. 110 Ω
Protective circuit	Overload protection

Connection data

Inline connector

Connection method	Spring-cage connection
Conductor cross-section, rigid	0.08 mm ² ... 1.5 mm ²

IB IL AI 4/EF-2MBD - Inline terminal

2878544

<https://www.phoenixcontact.com/us/products/2878544>

Conductor cross-section, flexible	0.08 mm ² ... 1.5 mm ²
Conductor cross-section AWG	28 ... 16

Interfaces

Inline local bus

Connection method	Inline data jumper
Transmission speed	2 Mbps
Transmission physics	Copper

Dimensions

Dimensional drawing	
Width	48.8 mm
Height	119.8 mm
Depth	71.5 mm

Material specifications

Color	green
-------	-------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Degree of protection	IP20
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)

Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

Mounting

Mounting type	DIN rail mounting
---------------	-------------------

IB IL AI 4/EF-2MBD - Inline terminal




2878544


<https://www.phoenixcontact.com/us/products/2878544>

Drawings

Dimensional drawing

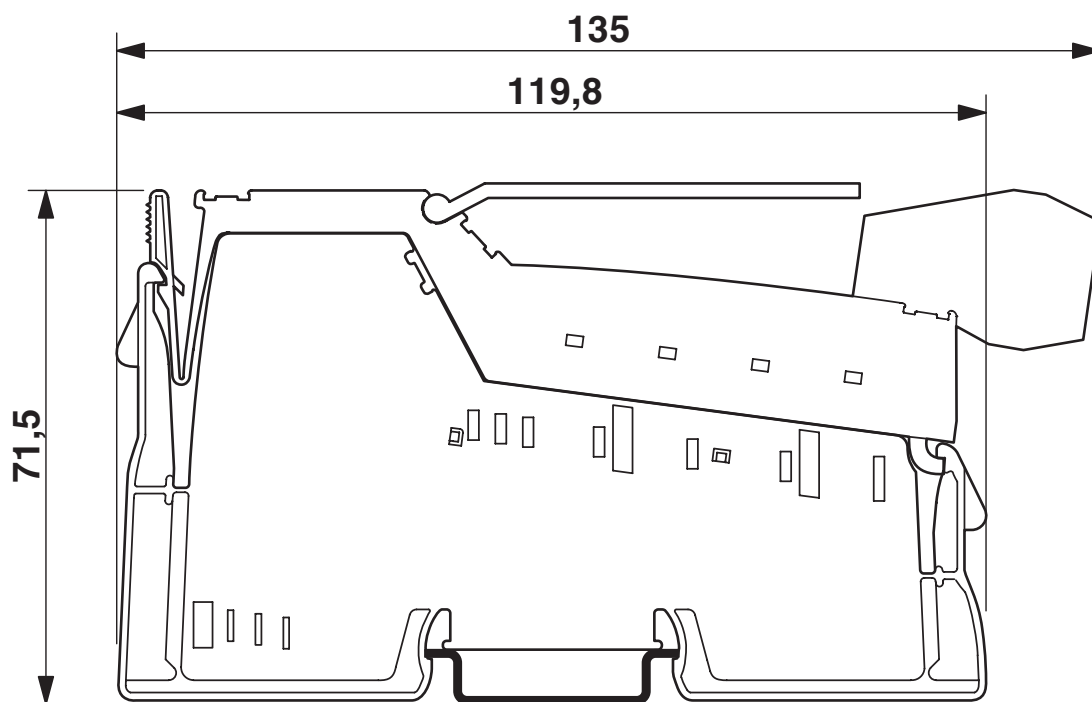

Connection diagram

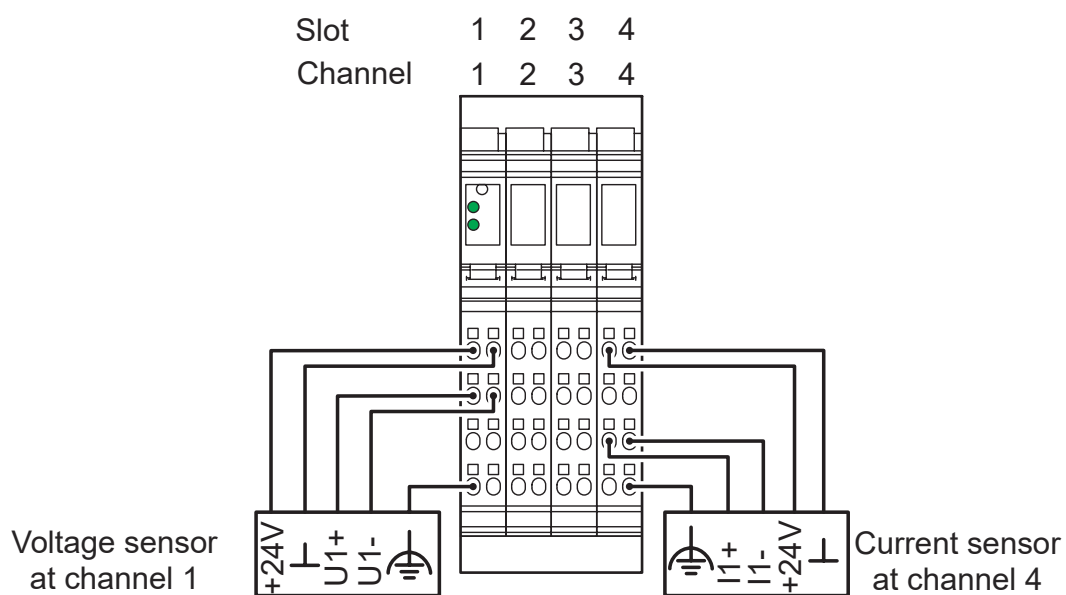

IB IL AI 4/EF-2MBD - Inline terminal



2878544

<https://www.phoenixcontact.com/us/products/2878544>

Environmental product compliance

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com