

MINI MCR-2-UNI-UI-UIRO-PT - Input signal conditioner



2902028

<https://www.phoenixcontact.com/us/products/2902028>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Universally configurable 4-way signal conditioner, with switching output and plug-in connection technology for the electrical isolation of analog signals. Configurable via DIP switch or software. Push-in connection technology, standard configuration.

Product description

Configurable, freely adjustable 4-way signal conditioner with switching output and plug-in connection technology for the electrical isolation, conversion, amplification, and filtering of standard signals. Current signals between 0 mA ... 24 mA and voltage signals between 0 V ... 12 V can be processed on the input side. Signals between 0 mA ... 21 mA and 0 V ... 10.5 V are possible on the output side. The minimum measuring span is 1 mA and 0.5 V. Full accuracy is maintained with a measuring span greater than 10 mA and 5 V. You can configure the device using one of the free software solutions. Default settings can also be made directly on the device by simply using the DIP switches (see configuration table). The measuring transducer supports fault monitoring and NFC communication.

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2902028 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | C404 |
| Product key | DK1121 |
| GTIN | 4046356649698 |
| Weight per piece (including packing) | 122 g |
| Weight per piece (excluding packing) | 62.9 g |
| Customs tariff number | 85437090 |
| Country of origin | DE |

MINI MCR-2-UNI-UI-UIRO-PT - Input signal conditioner



2902028

<https://www.phoenixcontact.com/us/products/2902028>

Technical data

Notes

Utilization restriction

| | |
|----------|---|
| EMC note | EMC: class A product, see manufacturer's declaration in the download area |
|----------|---|

Product properties

| | |
|-----------------|--------------------------|
| Product type | Input signal conditioner |
| Product family | MINI Analog Pro |
| No. of channels | 1 |
| Configuration | DIP switches |
| | Software |
| | App |

System properties

Functionality

| | |
|---------------|--------------|
| Configuration | DIP switches |
| | Software |
| | App |

Electrical properties

| | |
|---|--|
| Electrical isolation | 4-way isolation |
| Electrical isolation between input and output | yes |
| Step response (0–99%) | 140 ms (15 Hz sample rate) |
| | 45 ms (60 Hz sample rate) |
| | 25 ms (240 Hz sample rate, can only be set via software) |
| Maximum temperature coefficient | 0.01 %/K |
| Temperature coefficient, typical | 0.01 %/K |
| Maximum transmission error | 0.1 % (of final value) |

Electrical isolation

| | |
|----------------------|----|
| Overvoltage category | II |
| Pollution degree | 2 |

Electrical isolation Input/output/power supply IEC/EN 61010-1

| | |
|--------------------------|-----------------------|
| Standards/regulations | IEC/EN 61010-1 |
| Rated insulation voltage | 300 V _{rms} |
| Test voltage | 3 kV AC (50 Hz, 60 s) |
| Insulation | Reinforced insulation |

Supply

| | |
|------------------------|---------|
| Nominal supply voltage | 24 V DC |
|------------------------|---------|

MINI MCR-2-UNI-UI-UIRO-PT - Input signal conditioner



2902028

<https://www.phoenixcontact.com/us/products/2902028>

| | |
|------------------------------|--|
| Supply voltage range | 9.6 V DC ... 30 V DC (The DIN rail connector (ME 6,2 TBUS-2 1,5/5-ST-3,81 GN, item no. 2869728) can be used to bridge the supply voltage. It can be snapped onto a 35 mm DIN rail in accordance with EN 60715) |
| Typical current consumption | 32 mA (24 V DC) |
| | 63 mA (12 V DC) |
| Power consumption (1 output) | ≤ 1 W (at I _{OUT} = 20 mA, 9.6 V DC, 600 Ω load) |

Input data

Signal: Voltage/current

| | |
|-----------------------------------|--|
| Number of inputs | 1 |
| Configurable/programmable | Yes |
| Voltage input signal | 0 V ... 10 V (via DIP switch) |
| | 2 V ... 10 V (via DIP switch) |
| | 0 V ... 5 V (via DIP switch) |
| | 1 V ... 5 V (via DIP switch) |
| | 10 V ... 0 V (via DIP switch) |
| | 10 V ... 2 V (via DIP switch) |
| | 5 V ... 0 V (via DIP switch) |
| | 5 V ... 1 V (via DIP switch) |
| | 0 V ... 12 V (can be set via software) |
| Max. voltage input signal | 12 V |
| Current input signal | 0 mA ... 20 mA (via DIP switch) |
| | 4 mA ... 20 mA (via DIP switch) |
| | 0 mA ... 10 mA (via DIP switch) |
| | 2 mA ... 10 mA (via DIP switch) |
| | 20 mA ... 0 mA (via DIP switch) |
| | 20 mA ... 4 mA (via DIP switch) |
| | 10 mA ... 0 mA (via DIP switch) |
| | 10 mA ... 2 mA (via DIP switch) |
| | 0 mA ... 24 mA (can be set via software) |
| Max. current input signal | 24 mA |
| Input resistance of voltage input | > 120 kΩ |
| Input resistance current input | approx. 50 Ω (+0.7 V for test diode) |

Output data

Switching: Transistor

| | |
|---------------------------|------------------|
| Number of outputs | 1 |
| Contact switching type | 1 N/O contact |
| Minimum switching voltage | 1 V |
| Maximum switching voltage | 30 V DC |
| Min. switching current | 100 μA |
| Max. switching current | 100 mA (at 30 V) |

MINI MCR-2-UNI-UI-UIRO-PT - Input signal conditioner



2902028

<https://www.phoenixcontact.com/us/products/2902028>

Signal: Voltage/current

| | |
|---------------------------------|--|
| Number of outputs | 1 |
| Configurable/programmable | Yes |
| Voltage output signal | 0 V ... 10 V (via DIP switch) 2 V ... 10 V (via DIP switch) 0 V ... 5 V (via DIP switch) 1 V ... 5 V (via DIP switch) 0 V ... 10.5 V (can be set via software) |
| Max. voltage output signal | approx. 12.3 V |
| Current output signal | 0 mA ... 20 mA (via DIP switch) 4 mA ... 20 mA (via DIP switch) 0 mA ... 10 mA (via DIP switch) 2 mA ... 10 mA (via DIP switch) 0 mA ... 21 mA (can be set via software) |
| Max. current output signal | 24.6 mA |
| Load/output load voltage output | $\geq 10 \text{ k}\Omega$ |
| Load/output load current output | $\leq 600 \Omega$ (at 20 mA) |
| Ripple | $< 20 \text{ mV}_{PP}$ (at 600 Ω) $< 20 \text{ mV}_{PP}$ (at 600 Ω) |

Connection data

| | |
|----------------------------------|--|
| Connection method | Push-in connection |
| Stripping length | 10 mm |
| Conductor cross-section rigid | 0.2 mm ² ... 2.5 mm ² (with ferrule) 0.14 mm ² ... 2.5 mm ² (without ferrule) |
| Conductor cross-section flexible | 0.14 mm ² ... 2.5 mm ² |
| Conductor cross-section AWG | 24 ... 12 (flexible) |

Ex data

| | |
|-----------------------|--------------|
| Ex installation (EPL) | Gc Div. 2 |
|-----------------------|--------------|

Interfaces

Data: IFS interface

| | |
|-------------------|------------------|
| Connection method | Micro USB type B |
|-------------------|------------------|

Signaling

| | |
|------------------|---|
| Status display | Green LED (supply voltage) Yellow LED (switching output) |
| Error indication | Red LED |

Dimensions

| | |
|--------|-----------|
| Width | 6.2 mm |
| Height | 109.81 mm |

MINI MCR-2-UNI-UI-UIRO-PT - Input signal conditioner



2902028

<https://www.phoenixcontact.com/us/products/2902028>

| | |
|-------|----------|
| Depth | 119.2 mm |
|-------|----------|

Material specifications

| | |
|--|-----------------|
| Color | gray (RAL 7042) |
| Housing material | PBT |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 2 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 2 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 2 |

Environmental and real-life conditions

Ambient conditions

| | |
|---|-------------------------------|
| Degree of protection | IP20 (not assessed by UL) |
| Ambient temperature (operation) | -40 °C ... 70 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Altitude | ≤ 2000 m |
| Permissible humidity (operation) | 5 % ... 95 % (non-condensing) |

Approvals

CE

| | |
|-------------|--------------|
| Certificate | CE-compliant |
|-------------|--------------|

ATEX

| | |
|----------------|--------------------------|
| Identification | ⊕ II 3 G Ex ec IIC T4 Gc |
| Certificate | BVS 19 ATEX E 083 X |

IECEX

| | |
|----------------|--------------------|
| Identification | Ex ec IIC T4 Gc |
| Certificate | IECEX BVS 19.0072X |

CCC / China-Ex

| | |
|----------------|-----------------|
| Identification | Ex ec IIC T4 Gc |
|----------------|-----------------|

UL, USA/Canada

| | |
|----------------|---------------------------------------|
| Identification | UL 508 Listed |
| | Class I, Div. 2, Groups A, B, C, D T6 |
| | Class I, Zone 2, Group IIC T6 |

Shipbuilding approval

| | |
|-------------|--------------------------|
| Certificate | DNV GL TAA000021E Rev. 1 |
|-------------|--------------------------|

EAC Ex

| | |
|----------------|---------------------------------|
| Identification | ⊕ Ex ec IIC T4 Gc |
| Certificate | BY/112 02.01 TP012 103.01 00079 |

Shipbuilding data

| | |
|-------------|---|
| Temperature | B |
| Humidity | B |

MINI MCR-2-UNI-UI-UIRO-PT - Input signal conditioner



2902028

<https://www.phoenixcontact.com/us/products/2902028>

| | |
|-----------|---|
| Vibration | A |
| EMC | A |
| Enclosure | Required protection according to the Rules shall be provided upon installation on board |

EMC data

| | |
|-------------------------------|--|
| Electromagnetic compatibility | Conformance with EMC directive |
| Noise immunity | EN 61000-6-2 |
| Note | When being exposed to interference, there may be minimal deviations. |

Noise emission

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-6-4 |
|-----------------------|--------------|

Electrostatic discharge

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
|-----------------------|--------------|

Electrostatic discharge

| | |
|----------|---|
| Comments | Safety measures must be taken to prevent electrostatic discharge. |
|----------|---|

Electromagnetic HF field

| | |
|--|--------------------------|
| Designation | Electromagnetic RF field |
| Standards/regulations | EN 61000-4-3 |
| Typical deviation from the measuring range final value | 0.2 % |

Fast transients (burst)

| | |
|--|-------------------------|
| Designation | Fast transients (burst) |
| Standards/regulations | EN 61000-4-4 |
| Typical deviation from the measuring range final value | 0.1 % |

Surge current load (surge)

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-5 |
|-----------------------|--------------|

Conducted interference

| | |
|--|-------------------------|
| Designation | Conducted interferences |
| Standards/regulations | EN 61000-4-6 |
| Typical deviation from the measuring range final value | 2.8 % |

Standards and regulations

| | |
|----------------------|-----------------|
| Electrical isolation | 4-way isolation |
|----------------------|-----------------|

GB Standard

| | |
|-----------------------|-------------|
| Standards/regulations | GB/T 3836.1 |
| | GB/T 3836.3 |

Mounting

| | |
|---------------|-------------------|
| Mounting type | DIN rail mounting |
|---------------|-------------------|

MINI MCR-2-UNI-UI-UIRO-PT - Input signal conditioner



2902028

<https://www.phoenixcontact.com/us/products/2902028>

| | |
|-------------------|---|
| Assembly note | The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail. |
| Mounting position | any |


MINI MCR-2-UNI-UI-UIRO-PT - Input signal conditioner

2902028

<https://www.phoenixcontact.com/us/products/2902028>

Drawings

Block diagram

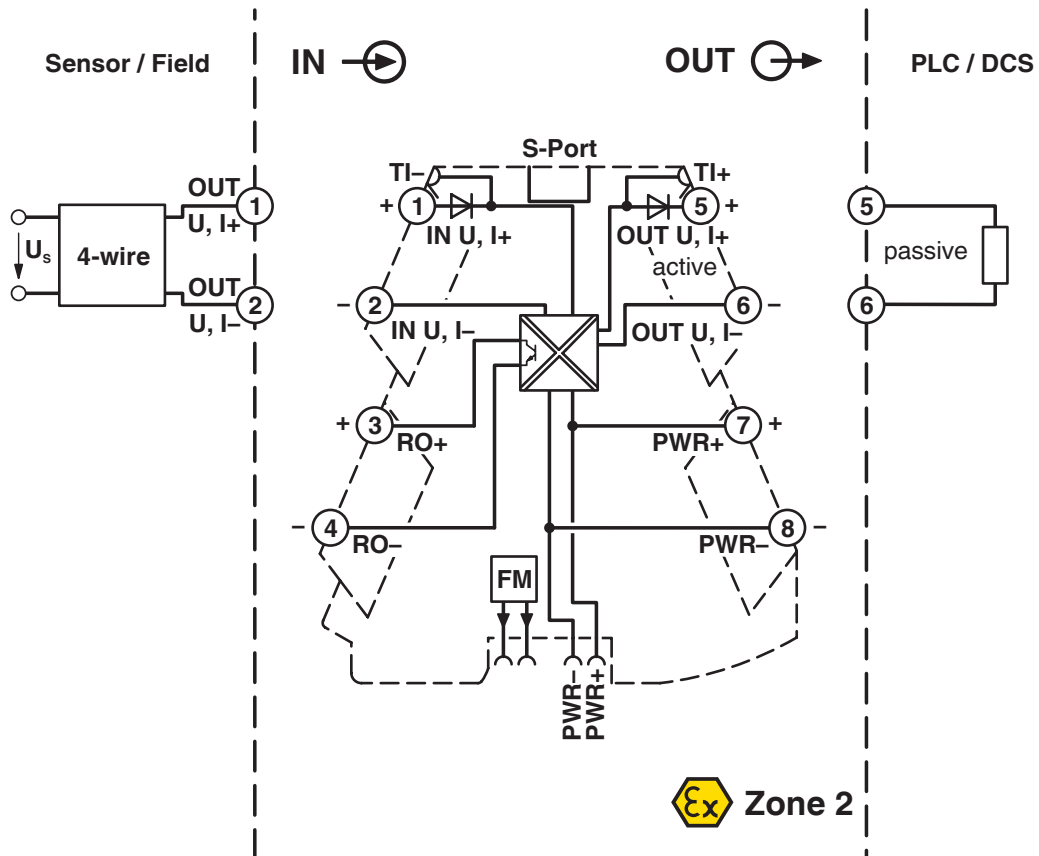

MINI MCR-2-UNI-UI-UIRO-PT - Input signal conditioner




2902028

<https://www.phoenixcontact.com/us/products/2902028>


Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2902028>

 **UL Listed**
Approval ID: FILE E 238705


 **cUL Listed**
Approval ID: FILE E 238705


DNV
Approval ID: TAA000021E


 **IECEx**
Approval ID: IECEx BVS 19.0072X

 **cUL Listed**
Approval ID: E196811

 **UL Listed**
Approval ID: E196811

 **ATEX**
Approval ID: BVS 19 ATEX E 083 X

 **EAC Ex**
Approval ID: TP012 103.01 00079

 **CCC**
Approval ID: 2022122310115964

MINI MCR-2-UNI-UI-UIRO-PT - Input signal conditioner



2902028

<https://www.phoenixcontact.com/us/products/2902028>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27210120 |
| ECLASS-15.0 | 27210120 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC002653 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121000 |
|-------------|----------|

MINI MCR-2-UNI-UI-UIRO-PT - Input signal conditioner



2902028

<https://www.phoenixcontact.com/us/products/2902028>

Environmental product compliance

EU RoHS

| | |
|---|--------------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 7(a), 7(c)-I |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| | 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol(CAS: 79-94-7) |
| SCIP | 3a001e9b-b77d-4a89-ac40-df32d014f789 |

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com