

FLKM 10-PA-ROC800 - Front adapter



2904889

<https://www.phoenixcontact.com/us/products/2904889>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

VARIOFACE front adapters for ROC800 controller



Your advantages

- Interface from field wiring to ROC800 controller
- Design reduces installed wiring times vs discrete field wiring
- Integrated ZB channel allows flexible marking of device
- Preassembled system cables are connected directly to I/O modules using the front adapters
- Intended for use with ten-position ROC800 I/O modules such as: ACIO, AI-12, AI-16, AO, APM, DIDO, PI and RTD
- Front adapter with FLK10 connector

Commercial data

Item number	2904889
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C423
Product key	DK2BMK
GTIN	4046356987035
Weight per piece (including packing)	37.8 g
Weight per piece (excluding packing)	36 g
Customs tariff number	85366990
Country of origin	US

FLKM 10-PA-ROC800 - Front adapter



2904889

<https://www.phoenixcontact.com/us/products/2904889>

Technical data

Product properties

Product type	Front adapter
--------------	---------------

Electrical properties

Operating voltage (AC/DC)	≤ 60 V AC/DC
Current (Per path)	≤ 1 A

Supported controller: EMERSON ROC800

Suitable I/O card	ROC800 ACIO
	ROC800 AI-12
	ROC800 AI-16
	ROC800 AO
	ROC800 APM
	ROC800 DIDO
	ROC800 PI
	ROC800 RTD

Connection data

Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	10
Pitch	2.54 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Notes

Notes on operation	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.
--------------------	--

FLKM 10-PA-ROC800 - Front adapter




2904889

<https://www.phoenixcontact.com/us/products/2904889>

Drawings

Circuit diagram

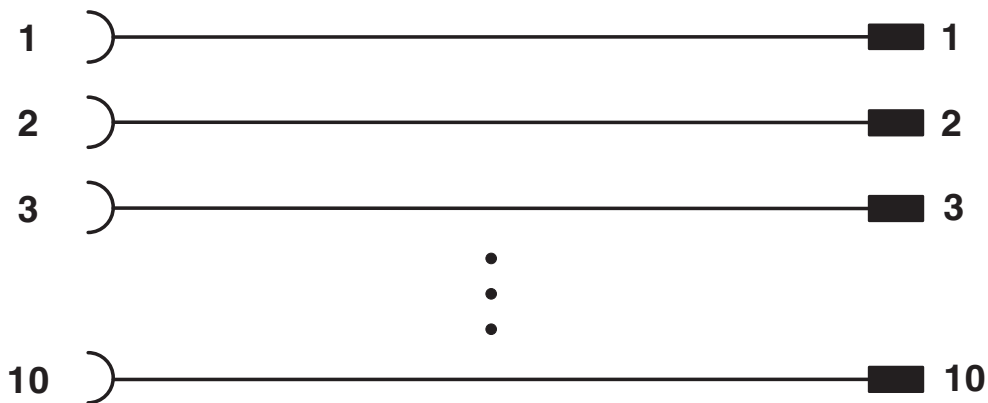

FLKM 10-PA-ROC800 - Front adapter



2904889

<https://www.phoenixcontact.com/us/products/2904889>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2904889>



cUL Recognized
Approval ID: E238705



UL Recognized
Approval ID: E238705

FLKM 10-PA-ROC800 - Front adapter



2904889

<https://www.phoenixcontact.com/us/products/2904889>

Classifications

ECLASS

ECLASS-13.0	27242292
ECLASS-15.0	27242292

ETIM

ETIM 10.0	EC002584
-----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

FLKM 10-PA-ROC800 - Front adapter



2904889

<https://www.phoenixcontact.com/us/products/2904889>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com