

# ELR H5-IES-PT/500AC-06-IFS - Hybrid motor starter



2905138

<https://www.phoenixcontact.com/us/products/2905138>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Networkable hybrid motor starter for reversing 3~ AC motors up to 500 V AC and 0.6 A output current, with adjustable overload shutdown, emergency stop function to SIL 3 / PL e and push-in connection, DIN rail connector provided.

## Your advantages

- 22.5 mm wide
- Safety level in accordance with IEC 61508-1: SIL 3, ISO 13849: PL e
- Reduction in wiring
- Space saving
- Long service life
- 3-phase loop bridges
- Adjustable current for bimetal function
- Low-wear switching

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 2905138       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | C470          |
| Product key                          | DK7432        |
| GTIN                                 | 4046356919531 |
| Weight per piece (including packing) | 310.7 g       |
| Weight per piece (excluding packing) | 282.7 g       |
| Customs tariff number                | 85371098      |
| Country of origin                    | DE            |

## Technical data

### Product properties

|                |                       |
|----------------|-----------------------|
| Product type   | Hybrid motor starters |
| Product family | CONTACTRON            |
| Operating mode | 100% operating factor |

### Electrical properties

|   |                         |
|---|-------------------------|
| Number of phases                                | 3                       |
| Motor starter type                              | Reversing starter       |
| Switching frequency                             | ≤ 2 Hz (Load-dependent) |
| Maximum power dissipation for nominal condition | 0.5 W                   |
| Switching frequency                             | ≤ 2 Hz (Load-dependent) |
| Maximum power dissipation                       | 2.5 W                   |
| Minimum power dissipation                       | 0.88 W                  |
| Coordination type                               | 1                       |

### Supply

|  |   |
|--|---|
| Rated control circuit supply voltage $U_S$ | 24 V DC   |
| Control supply voltage range               | 19.2 V DC ... 30 V DC   |
| Rated control supply current $I_S$         | 60 mA   |
| Protective circuit                         | Surge protection<br>Reverse polarity protection; Parallel polarity protection diode |

### Insulation characteristics

|  |  |
|--|--|
| Rated insulation voltage   | 550 V  |
| Rated surge voltage  | 6 kV   |
| Overvoltage category   | III  |
| Degree of pollution  | 2  |
| Insulation characteristics between the control input and control supply voltage, and auxiliary circuit to the main circuit | Safe isolation (IEC 60947-1)                                     |
| Isolation characteristics between the control input and control supply voltage to auxiliary circuit                        | Safe isolation (IEC 60947-1) in the auxiliary circuit ≤ 300 V AC |

### Emergency tripping

|                   |         |
|-------------------|---------|
| Operate threshold | > 10 A  |
| Response time     | < 0.5 s |

## Input data

### Control

|            |   |
|------------|---|
| Input name | Enable input  |
| Note       | The enable input is compatible with signals with blanking (semiconductor output signals with test pulse with max. 3 ms duration), unblanking pulses of max. 4 ms are tolerated without adversely affecting the safety function. |

# ELR H5-IES-PT/500AC-06-IFS - Hybrid motor starter



2905138

<https://www.phoenixcontact.com/us/products/2905138>

|                               |                               |
|-------------------------------|-------------------------------|
| Rated actuating voltage $U_C$ | 24 V DC                       |
| Triggering voltage range      | 19.2 V DC ... 30 V DC         |
| Rated actuating current $I_C$ | 7 mA                          |
| Switching threshold           | 9.6 V ("0" signal)            |
|                               | 19.2 V ("1" signal)           |
| Switching level               | < 5 V DC (For EMERGENCY STOP) |
| Typical turn-off time         | < 30 ms                       |
| Protective circuit            | Reverse polarity protection   |

## Output data

### AC output

|   |                                    |
|---|------------------------------------|
| Rated operating voltage $U_e$                     | 500 V AC                           |
| Operating voltage range                           | 42 V AC ... 550 V AC               |
| Rated operating current $I_e$                     | 0.6 A (AC-51)                      |
|   | 0.6 A (AC-53a)                     |
| Mains frequency                                   | 50/60 Hz                           |
| Load current range                                | 75 mA ... 600 mA (see to derating) |
| Trigger characteristic in acc. with IEC 60947-4-2 | Class 10                           |
| Cooling time                                      | 20 min (for auto reset)            |
| Leakage current                                   | 0 mA                               |
| Protective circuit                                | Surge protection; Varistor         |

## Connection data

### Control circuits

|                                  |   |
|----------------------------------|---|
| Connection method                | Push-in connection                          |
| Stripping length                 | 10 mm                                       |
| Conductor cross-section rigid    | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross-section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross-section AWG      | 24 ... 14                                   |

### Load circuit

|                                  |   |
|----------------------------------|---|
| Connection method                | Push-in connection                          |
| Stripping length                 | 10 mm                                       |
| Conductor cross-section rigid    | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross-section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross-section AWG      | 24 ... 14                                   |

## Signaling

|                           |              |
|---------------------------|--------------|
| Status display            | LED (yellow) |
| Operating voltage display | Green LED    |
| Error indication          | Red LED      |

## Dimensions

|       |         |
|-------|---------|
| Width | 22.5 mm |
|-------|---------|

# ELR H5-IES-PT/500AC-06-IFS - Hybrid motor starter



2905138

<https://www.phoenixcontact.com/us/products/2905138>

|        |          |
|--------|----------|
| Height | 107.5 mm |
| Depth  | 114 mm   |

## Material specifications

|  |              |
|--|--------------|
| Flammability rating according to UL 94 (Housing) | V0 (Housing) |
|--|--------------|

## Environmental and real-life conditions

### Ambient conditions

|   |                                    |
|---|------------------------------------|
| Degree of protection                    | IP20                               |
| Ambient temperature (operation)         | -5 °C ... 60 °C (observe derating) |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C                   |
| Altitude                                | ≤ 2000 m                           |

## Approvals

### UKCA

|             |                |
|-------------|----------------|
| Certificate | UKCA-compliant |
|-------------|----------------|

### ATEX

|                |   |
|----------------|---|
| Identification | Ⓜ II (2) G [Ex eb] [Ex db] [Ex pxb]<br>Ⓜ II (2) D [Ex tb] [Ex pb] |
| Certificate    | PTB 15 ATEX 3000  |

### UL approval

|             |                              |
|-------------|------------------------------|
| Certificate | NLDX.E228652<br>NRNT.E172140 |
|-------------|------------------------------|

### Safety Integrity Level (SIL, IEC 61508)

|                |               |
|----------------|---------------|
| Identification | ≤ 3           |
| Note           | Safe shutdown |

### Safety Integrity Level (SIL, IEC 61508)

|                |                  |
|----------------|------------------|
| Identification | 2                |
| Note           | Motor protection |

### Performance Level (ISO 13849)

|                |               |
|----------------|---------------|
| Identification | e             |
| Note           | Safe shutdown |

### Category (ISO 13849)

|                |               |
|----------------|---------------|
| Identification | ≤ 3           |
| Note           | Safe shutdown |

### UL data

|                    |  |
|--------------------|--|
| SCCR               | 100 kA (480 V AC (fuse: 30 A class CC/30 A class J (high fault)))<br>5 kA (480 V AC (fuse: 20 A RK5 (standard fault))) |
| FLA                | 0.6 A (480 V AC)   |
| Group installation | 20 A (class RK5, SCCR 5kA (480 V AC), #24 - 14 AWG max.  |

# ELR H5-IES-PT/500AC-06-IFS - Hybrid motor starter



2905138

<https://www.phoenixcontact.com/us/products/2905138>

|                    |   |
|--------------------|---|
|                    | solid and stranded)   |
|                    | 30 A (class CC or J, SCCR 100kA (480 V AC), #24 - 14 AWG max, solid and stranded) |
| Category code      | NLDX / NRNT   |
| Horsepower ratings | -   |

## Standards and regulations

### Standards/regulations


|                       |              |
|-----------------------|--------------|
| Standards/regulations | IEC 60947-1  |
|                       | EN 60947-4-2 |
|                       | IEC 61508    |
|                       | ISO 13849    |

## Mounting

|                   |  |
|-------------------|--|
| Mounting type     | DIN rail mounting                                  |
| Assembly note     | alignable, for spacing see derating                |
| Mounting position | vertical (horizontal DIN rail, motor output below) |


Drawings

Diagram

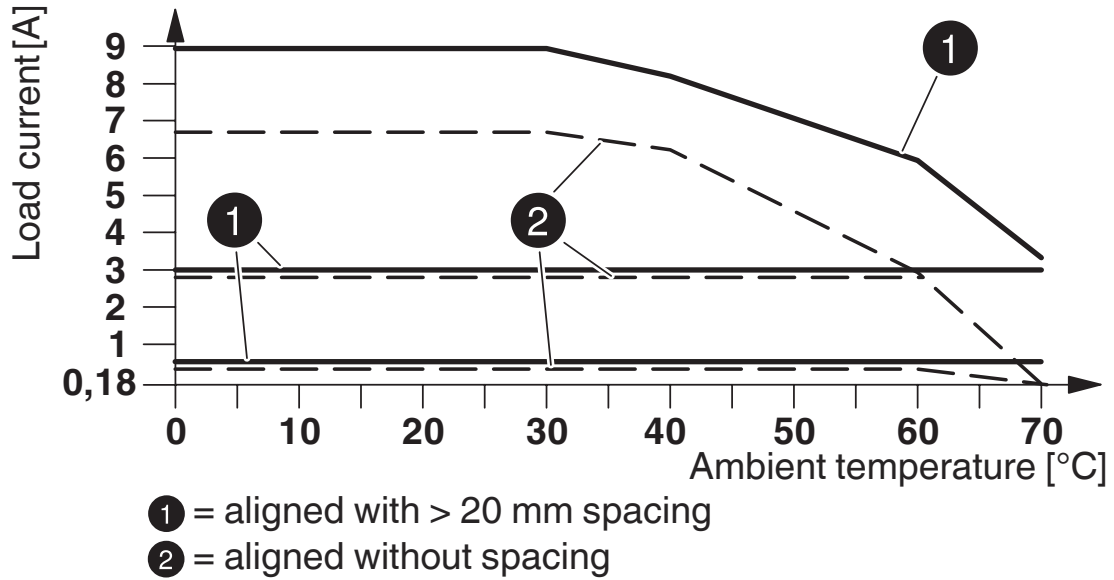

Derating diagram

Block diagram

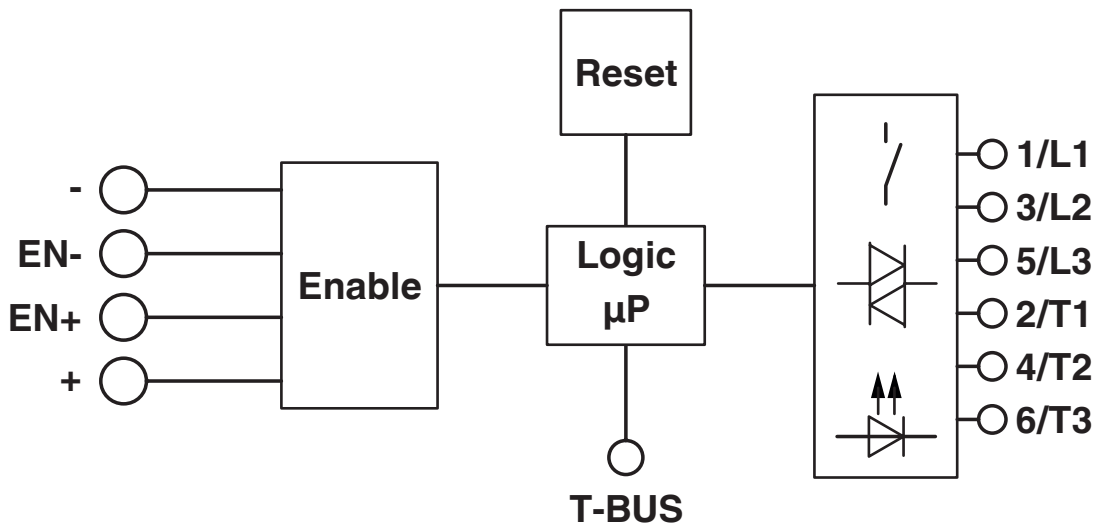

2905138

<https://www.phoenixcontact.com/us/products/2905138>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2905138>



### IECEE CB Scheme

Approval ID: CB-DE1-60807-A1



### EAC

Approval ID: RU\*C-DE.\*08.B.00520\*



### UL Listed

Approval ID: FILE E 172140



### CCC

Approval ID: 2016010304900298



### cUL Listed

Approval ID: FILE E 172140



### cUL Listed

Approval ID: E228652



### UL Listed

Approval ID: E228652



### VDE Zeichengenehmigung

Approval ID: 40054426



### CCC

Approval ID: 2024010304672814



### ATEX

Approval ID: PTB 15 ATEX 3000

2905138

<https://www.phoenixcontact.com/us/products/2905138>

## Classifications

### ECLASS

|                   |          |
|-------------------|----------|
| ECLASS-13.0       | 27370905 |
| ECLASS-15.0       | 27370905 |
| ECLASS-15.0 ASSET | 27250101 |

### ETIM

|           |          |
|-----------|----------|
| ETIM 10.0 | EC001037 |
|-----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 25173900 |
|-------------|----------|

2905138

<https://www.phoenixcontact.com/us/products/2905138>

## Environmental product compliance

### EU RoHS

|   |              |
|---|--------------|
| Fulfills EU RoHS substance requirements | Yes          |
| Exemption                               | 7(a), 7(c)-I |

### China RoHS

|  |   |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50   |
|  | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | b6657f6e-b8e4-4e13-bf1b-31d4367c14bd |

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)