


ST 2,5-3PV BU - Multi-level terminal block



1025465

<https://www.phoenixcontact.com/us/products/1025465>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Multi-level terminal block, with equipotential bonder, nom. voltage: 500 V, nominal current: 20 A, number of connections: 6, connection method: Spring-cage connection, Rated cross section: 2.5 mm², 1st, 2nd and 3rd level, cross section: 0.08 mm² - 4 mm², mounting type: NS 35/7,5, NS 35/15, color: blue

Your advantages

- Simple wiring of very small, flexible conductors
- Enables one-handed wiring
- No restriction on cross-sections when using conductors with ferrules
- Reliable vibration resistance thanks to spring-loaded contact elements
- High space savings thanks to the compact integration of two separate circuits in a single terminal block
- Full flexibility thanks to the standardized CLIPLINE complete bridging, marking, and testing accessories

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1025465 |
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| Sales key | BE02 |
| Product key | BE2115 |
| GTIN | 4055626517247 |
| Weight per piece (including packing) | 18.744 g |
| Weight per piece (excluding packing) | 18.63 g |
| Customs tariff number | 85369010 |
| Country of origin | PL |

ST 2,5-3PV BU - Multi-level terminal block



1025465

<https://www.phoenixcontact.com/us/products/1025465>

Technical data

Product properties

| | |
|-----------------------|----------------------------|
| Product type | Multi-level terminal block |
| Product family | ST |
| Number of connections | 6 |
| Number of rows | 3 |
| Potentials | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--------|
| Rated surge voltage | 6 kV |
| Maximum power dissipation for nominal condition | 0.77 W |

Connection data

| | |
|---------------------------------|---------------------|
| Number of connections per level | 2 |
| Nominal cross section | 2.5 mm ² |

1st, 2nd and 3rd level

| | |
|---|---|
| Connection method | Spring-cage connection |
| Stripping length | 8 mm ... 10 mm |
| Internal cylindrical gage | A3 |
| Connection in acc. with standard | IEC 60947-7-1 |
| Conductor cross-section rigid | 0.08 mm ² ... 4 mm ² |
| Cross section AWG | 28 ... 12 (converted acc. to IEC) |
| Conductor cross-section flexible | 0.08 mm ² ... 2.5 mm ² |
| Conductor cross-section, flexible [AWG] | 28 ... 14 (converted acc. to IEC) |
| Conductor cross-section flexible ultrasound-compressed | 0.34 mm ² ... 4 mm ² |
| Conductor cross-section, flexible [AWG] ultrasound-compressed | 22 ... 12 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm ² ... 2.5 mm ² |
| Flexible conductor cross-section (ferrule with plastic sleeve) | 0.14 mm ² ... 2.5 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² |
| Nominal cross section | 2.5 mm ² |
| Nominal current | 20 A |
| Maximum load current | 28 A (with 4 mm ² conductor cross-section) |
| Nominal voltage | 500 V |

Dimensions

| | |
|-----------------|---------|
| Width | 5.2 mm |
| End cover width | 2.2 mm |
| Height | 99.5 mm |

ST 2,5-3PV BU - Multi-level terminal block



1025465

<https://www.phoenixcontact.com/us/products/1025465>

| | |
|--------------------|---------|
| Depth on NS 35/7,5 | 58 mm |
| Depth on NS 35/15 | 65.5 mm |

Material specifications

| | |
|--|-----------------|
| Color | blue (RAL 5015) |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |

Mechanical properties

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

Environmental and real-life conditions

Ambient conditions

| | |
|--|--|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-1 |
|----------------------------------|---------------|

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |

ST 2,5-3PV BU - Multi-level terminal block




1025465

<https://www.phoenixcontact.com/us/products/1025465>

Drawings

Circuit diagram

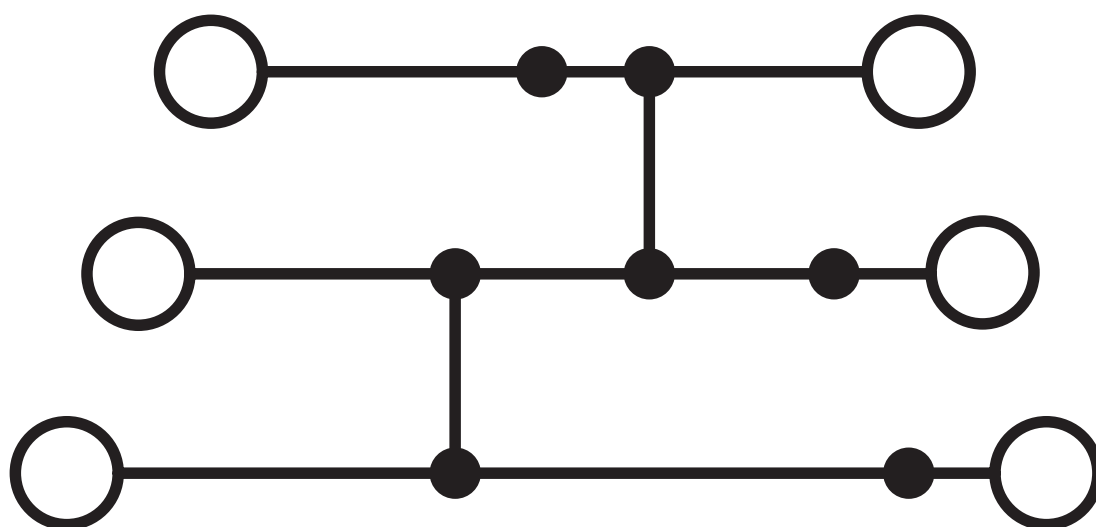

ST 2,5-3PV BU - Multi-level terminal block





1025465


<https://www.phoenixcontact.com/us/products/1025465>


Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1025465>

|  CSA Approval ID: 13631 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| B | 300 V | 20 A | 28 - 12 | - |
| C | 300 V | 20 A | 28 - 12 | - |

|  EAC Approval ID: RU C-DE.BL08.B.00644 | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

|  cULus Recognized Approval ID: E60425 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| B | 300 V | 20 A | 28 - 12 | - |
| C | 300 V | 20 A | 28 - 12 | - |
| D | 600 V | 5 A | 28 - 12 | - |

|  EAC Approval ID: KZ7500651131219505 | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

ST 2,5-3PV BU - Multi-level terminal block



1025465

<https://www.phoenixcontact.com/us/products/1025465>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27250102 |
| ECLASS-15.0 | 27250102 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC000897 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

ST 2,5-3PV BU - Multi-level terminal block



1025465

<https://www.phoenixcontact.com/us/products/1025465>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com