

# SACC-CI-M8MS-3P SMD TX - Contact carrier



1308251

<https://www.phoenixcontact.com/us/products/1308251>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact carrier, 3-position, Pin, straight, M8, A-coding, SMD reflow, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

## Your advantages

- Reduced mounting costs thanks to two-piece device connector
- Packaging available for automated pick and place assembly
- All common pin assignments and codings available
- Easy device integration thanks to mechanical port screw connections with threaded attachment, press-in contour or direct integration in the front plate
- Optional shield connection and seal for the device when not plugged in

## Commercial data

Item number	1308251
Packing unit	60 pc
Minimum order quantity	60 pc
Product key	ABQHCM
GTIN	4063151689247
Weight per piece (including packing)	22.22 g
Weight per piece (excluding packing)	2.35 g
Country of origin	DE

# SACC-CI-M8MS-3P SMD TX - Contact carrier



1308251

<https://www.phoenixcontact.com/us/products/1308251>

## Technical data

### Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
--------------------	--

### Product properties

Product type	Contact insert
Application	Signal
Number of positions	3
Seal present	no
Shielded	no
Coding	A
Thread type	M8

### Insulation characteristics

Overvoltage category	III
----------------------	-----

### Electrical properties

Contact resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$\leq 100 \text{ M}\Omega$
Nominal voltage $U_N$	48 V AC 60 V DC
Nominal current $I_N$	4 A

### Connection data

Connection method	SMD reflow
-------------------	------------

### Material specifications

Material Insulating body	PA
Material Contact	CuZn
Material Contact surface	Au
Flammability rating according to UL 94	V0

### Connector

#### Connection 1

Head design	Pin
Head cable outlet	straight
Head thread type	M8
Coding	A

# SACC-CI-M8MS-3P SMD TX - Contact carrier



1308251

<https://www.phoenixcontact.com/us/products/1308251>

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP67 (correctly plugged in and locked)
Ambient temperature (operation) (male connector/female connector)	-40 °C ... 105 °C (Plug / socket)
	-55 °C ... 105 °C (without mechanical actuation)

## Standards and regulations

Standard designation	M8 circular connector
Standards/specifications	according to IEC 61076-2-104

## Packaging specifications

Type of packaging	Tray
Delivery state	with assembly pad

# SACC-CI-M8MS-3P SMD TX - Contact carrier


1308251

<https://www.phoenixcontact.com/us/products/1308251>



## Drawings

Schematic diagram

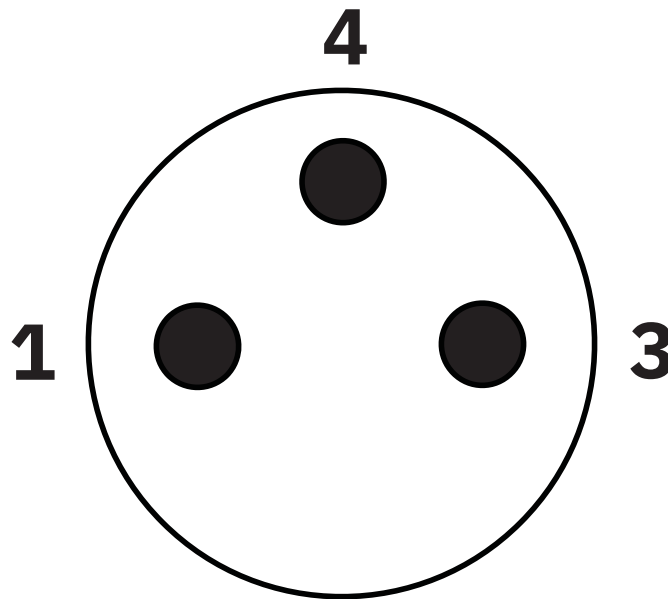

Pin assignment M8 plug, 3-pos., view male side

# SACC-CI-M8MS-3P SMD TX - Contact carrier



1308251

<https://www.phoenixcontact.com/us/products/1308251>

## Classifications

### ETIM

ETIM 9.0

EC003557

# SACC-CI-M8MS-3P SMD TX - Contact carrier



1308251

<https://www.phoenixcontact.com/us/products/1308251>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)