


# HC-HV06-I-CT-F - Contact insert



1405263

<https://www.phoenixcontact.com/us/products/1405263>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 6+2+PE, size: B16, power contacts: 6, control contacts: 2, number of connections per position: 1, Socket, Crimp connection, 690 V, 16 A, 0.5 mm<sup>2</sup> ... 4 mm<sup>2</sup>

## Your advantages

- Shock and vibration-resistant in accordance with DIN EN 61373

## Commercial data

Item number	1405263
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF61
Product key	AF7ABG
GTIN	4055626063515
Weight per piece (including packing)	72.92 g
Weight per piece (excluding packing)	48.9 g
Customs tariff number	85366990
Country of origin	CN

# HC-HV06-I-CT-F - Contact insert



1405263

<https://www.phoenixcontact.com/us/products/1405263>

## Technical data

### Mounting

Assembly note	To ensure correct use, installation in housing with IP54 protection or better is required
---------------	---


### Product properties

Product type	Contact insert with a fixed no. of positions
Series	HC-HV
Type	B16 B32
Number of positions	8
Connection profile	6+2+PE
Number of connections per position	1
No. of power contacts	6
No. of control contacts	2
Contact material type	turned

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Dimensions

Dimensional drawing	
Width	34 mm
Height	34.6 mm
Length	84 mm
Drill hole distance, horizontal	77.5 mm
Drill hole distance, vertical	27 mm

### Mechanical characteristics

Contact diameter	2.5 mm
------------------	--------

### Connection data

#### Connection technology

Connection technology	Crimp connection Crimp connection
Number of connections per position	1

#### Conductor connection

Conductor cross-section	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup> (power contacts)
-------------------------	--

# HC-HV06-I-CT-F - Contact insert



1405263

<https://www.phoenixcontact.com/us/products/1405263>

	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup> (control contacts)
Connection cross section AWG	20 ... 12 (power contacts)
	20 ... 12 (control contacts)
Tightening torque	0.8 Nm ... 1.2 Nm (PE connection)
	0.5 Nm ... 0.8 Nm (Mounting screws for mounting in the HEAVYCON housing)
Stripping length of the individual wire	7.5 mm (Power)
	7.5 mm (Signal)

## Electrical properties

Rated voltage (III/2) contacts	830 V
Rated voltage (III/3)	690 V
	690 V
Rated surge voltage (III/2)	8 kV
Rated surge voltage (III/3)	6 kV
Rated surge voltage	8 kV (power contacts)
	6 kV (control contacts)
Rated current	16 A (power contacts)
	16 A (control contacts)

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

## Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PC
Standards/regulations	PC

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

## Standards and regulations

### Testing

Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)
-----------------------	---


# HC-HV06-I-CT-F - Contact insert

1405263

<https://www.phoenixcontact.com/us/products/1405263>

## Drawings

Dimensional drawing

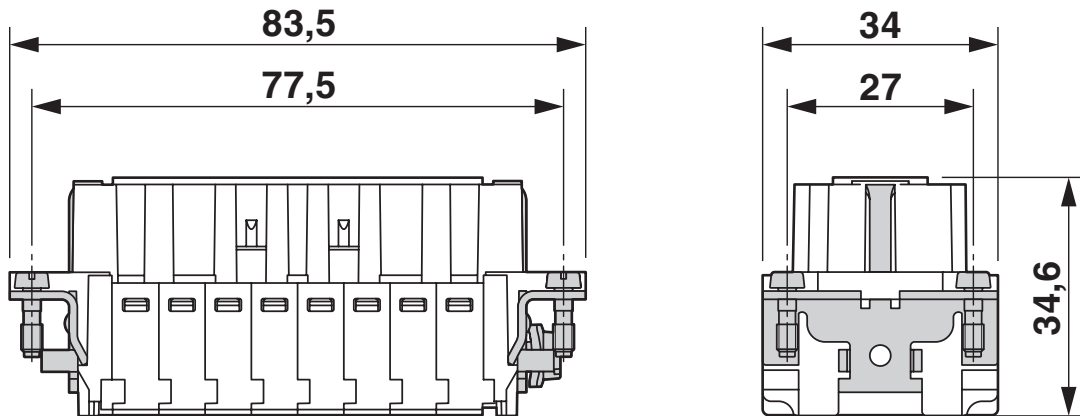

Dimensional drawing

Dimensional drawing



Mounting cutout when used without housing


# HC-HV06-I-CT-F - Contact insert

1405263

<https://www.phoenixcontact.com/us/products/1405263>



Schematic diagram

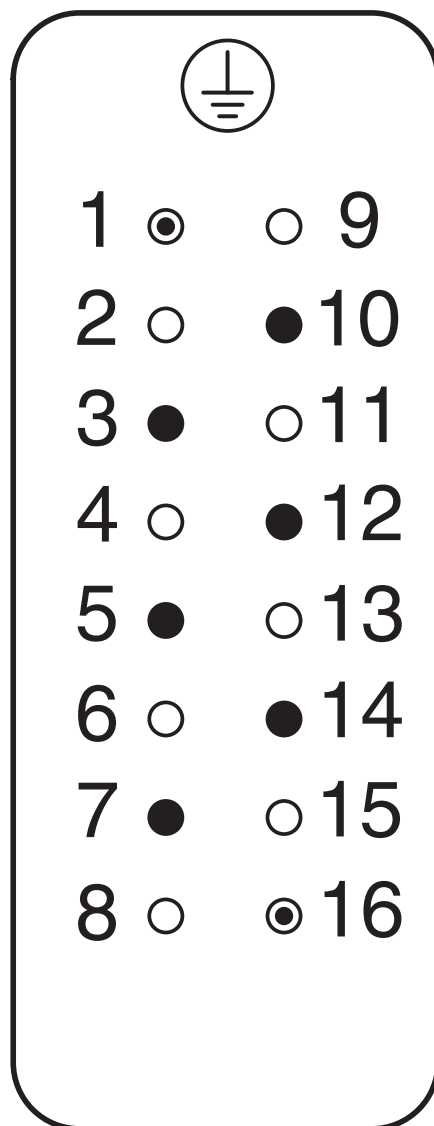


Connector pin assignment

# HC-HV06-I-CT-F - Contact insert



1405263

<https://www.phoenixcontact.com/us/products/1405263>

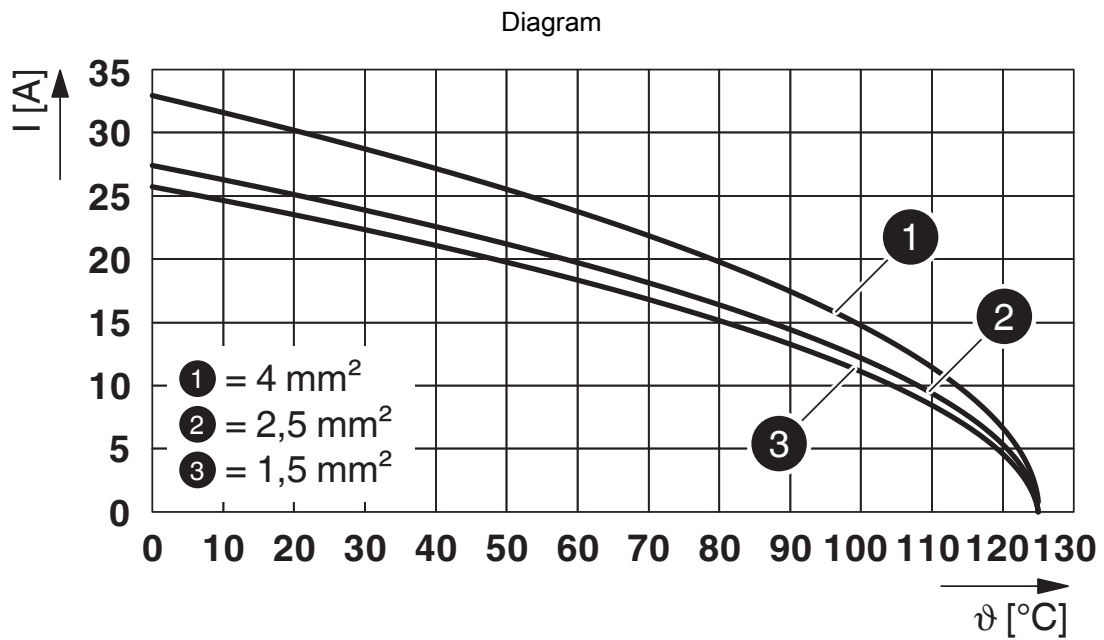

Derating diagram

# HC-HV06-I-CT-F - Contact insert



1405263

<https://www.phoenixcontact.com/us/products/1405263>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1405263>

### DNV

Approval ID: TAE000037S



### CSA

Approval ID: 013631\_6233\_01

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
keine				
	600 V	20 A	20 - 12	-



### cULus Recognized

Approval ID: E468743

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
keine				
	600 V	16 A	- 12	-

# HC-HV06-I-CT-F - Contact insert



1405263

<https://www.phoenixcontact.com/us/products/1405263>

## Classifications

### ECLASS

ECLASS-13.0	27440205
ECLASS-15.0	27440205

### ETIM

ETIM 10.0	EC000438
-----------	----------

### UNSPSC

UNSPSC 21.0	39121500
-------------	----------

# HC-HV06-I-CT-F - Contact insert



1405263

<https://www.phoenixcontact.com/us/products/1405263>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)