

SOL-SC-1ST-0-DC-2MPPT-1001 - String combiner box (SCB)



2404299

<https://www.phoenixcontact.com/us/products/2404299>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



String combiner box (SCB); MPP voltage: 1000 V DC; number of strings: 1; number of supported MPP trackers: 2; surge protection: T1 / T2; equipment: without special equipment; type of cable entry: SUNCLIX; scope of supply: DC connector for connecting the SCB

Product description

The Solarline string combiner boxes (SCBs) are used in both small rooftop systems and large ground-mounted systems. The main tasks of the SCBs are the surge protection of the photovoltaic system, collecting strings (if necessary), and looping through the protective equipotential bonding conductor for the local equipotential bonding.

Further functions are optional and depend on the equipment.

Examples of optional functions include protecting the strings with string fuses and disconnecting the strings via DC switch disconnectors or DC fire department switches.

You can determine the full scope of functions of the SCB from its item designation (see the application note for the type key of the SCB, which can be downloaded in the "Downloads" area).

Your advantages

- Fast installation and startup
- Standard-compliant switchgear and controlgear assembly, thanks to use of DIN EN 61439
- Large portfolio of string combiner boxes in stock
- Application-oriented consultation

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2404299 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Product key | DTHTAA |
| GTIN | 4055626396248 |
| Weight per piece (including packing) | 2,358 g |
| Weight per piece (excluding packing) | 2,000 g |
| Country of origin | DE |

SOL-SC-1ST-0-DC-2MPPT-1001 - String combiner box (SCB)



2404299

<https://www.phoenixcontact.com/us/products/2404299>

Technical data

Product properties

| | |
|-----------------|-------------------------------------|
| Product type | String combiner box (SCB) |
| Scope of supply | DC connector for connecting the SCB |
| Design | without special equipment |

Insulation characteristics

| | |
|------------------|----|
| Protection class | II |
|------------------|----|

Electrical properties

General

| | |
|-------------------------------|----------------|
| MPP voltage U_n | max. 1000 V DC |
| Open-circuit voltage U_{OC} | max. 1100 V DC |
| Current per string I_{max} | max. 40 A |

Indicator/remote signaling

| | |
|--------------------|--------------------------------|
| Connection name | Remote fault indicator contact |
| Switching function | Changeover contact, floating |

Surge protection

| | |
|--|---------------|
| EN type | T1 / T2 |
| IEC test classification | T1 / T2 |
| Protection level U_p | ≤ 3.5 kV |
| Total discharge current I_{Total} (10/350) μ s | 5 kA |
| Total discharge current I_{Total} (8/20) μ s | 40 kA |
| Short-circuit current rating I_{SCPV} | 40 A |

Input data

DC

| | |
|--|---|
| Number of inputs (Strings per MPP tracker) | 1 |
| Number of supported MPP trackers | 2 |

Output data

DC

| | |
|--|---|
| Number of outputs (MPP tracker) | 2 |
| Number of outputs (\pm per MPP tracker) | 1 |

Connection data

DC input

| | |
|---------------------------|---|
| Type of cable entry | SUNCLIX |
| Cable cross-section range | 2.5 mm ² ... 6 mm ² |

Lightning protection equipotential bonding & ground conductor

SOL-SC-1ST-0-DC-2MPPT-1001 - String combiner box (SCB)



2404299

<https://www.phoenixcontact.com/us/products/2404299>

| | |
|-------------------------|-----------------------|
| Type of cable entry | Cable gland |
| Connection method | Screw connection |
| Cable cross section | 2x 16 mm ² |
| External cable diameter | 2x 6 mm ... 12 mm |

DC output

| | |
|---------------------------|---|
| Type of cable entry | SUNCLIX |
| Cable cross-section range | 2.5 mm ² ... 6 mm ² |

Remote fault indicator contact

| | |
|----------------------------------|--|
| Connection method | Plug-in/screw connection via COMBICON |
| Conductor cross-section flexible | 0.14 mm ² ... 1.5 mm ² |

Dimensions

Housing

| | |
|--------|--------|
| Width | 180 mm |
| Height | 180 mm |
| Depth | 111 mm |

Material specifications

| | |
|--|-----------------------------|
| Material Housing | Polycarbonate |
| Material Cover/door | Polycarbonate (transparent) |
| Flammability rating according to UL 94 | V2 |

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|--|
| Degree of protection | IP65 |
| Impact strength | IK08 |
| Ambient temperature (operation) | -20 °C ... 55 °C |
| Solar radiation conditions | Outdoor installation - without direct sunlight |

Standards and regulations

| | |
|--------------------------|---|
| Standard designation | Low-voltage switchgear and controlgear assemblies - Part 2: Power switchgear and controlgear assemblies |
| Standards/specifications | EN 61439-2 |

SOL-SC-1ST-0-DC-2MPPT-1001 - String combiner box (SCB)




2404299

<https://www.phoenixcontact.com/us/products/2404299>

Drawings

Dimensional drawing

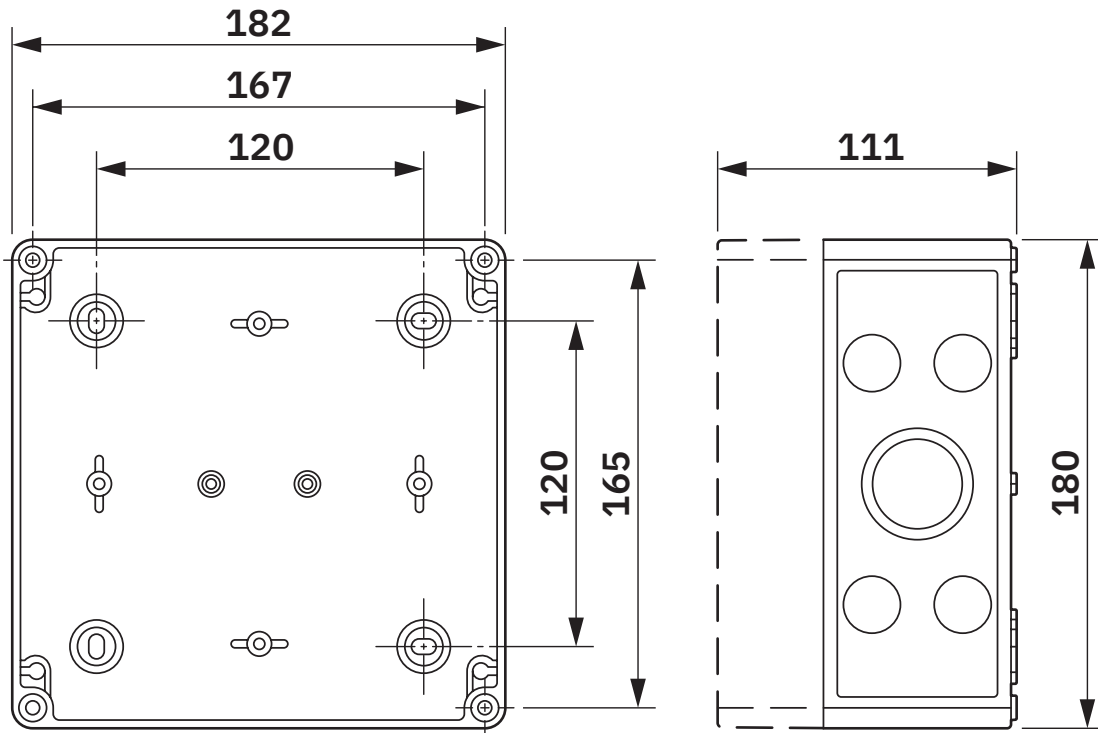

Housing dimensions


SOL-SC-1ST-0-DC-2MPPT-1001 - String combiner box (SCB)



2404299


<https://www.phoenixcontact.com/us/products/2404299>

Connection diagram

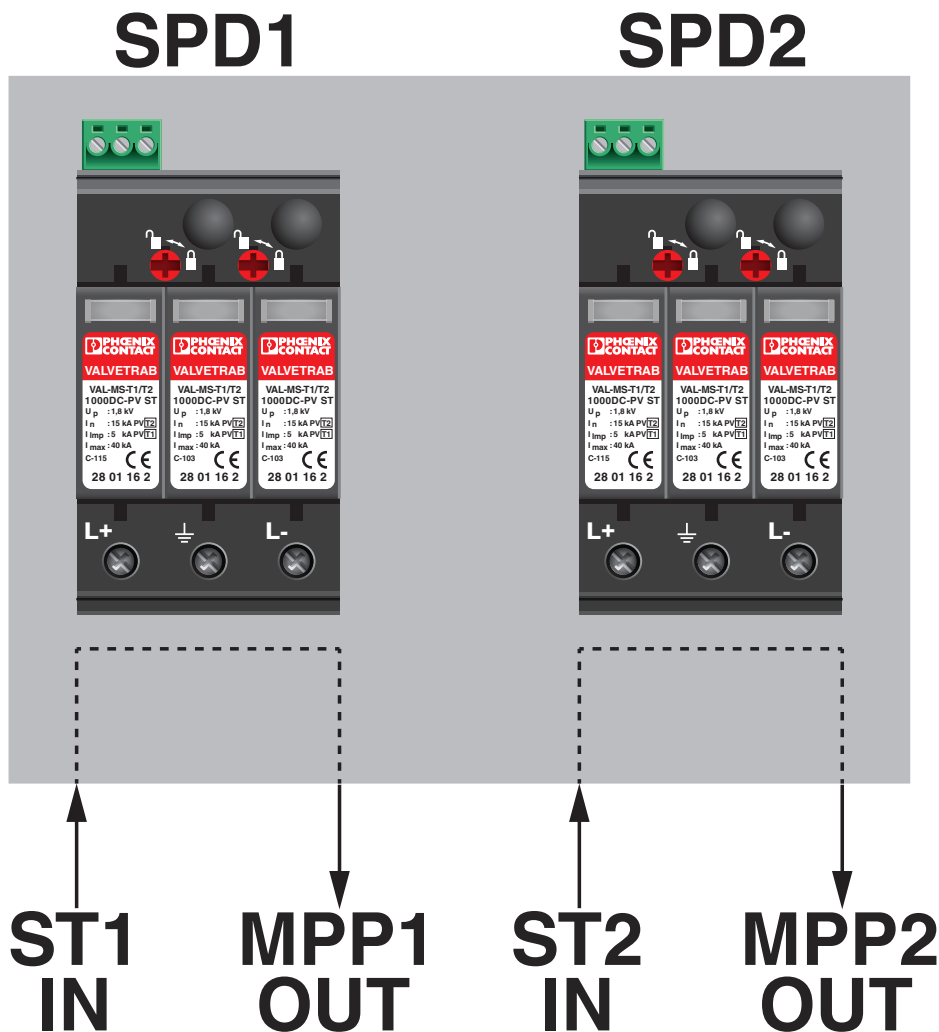

Schematic application drawing

Schematic diagram

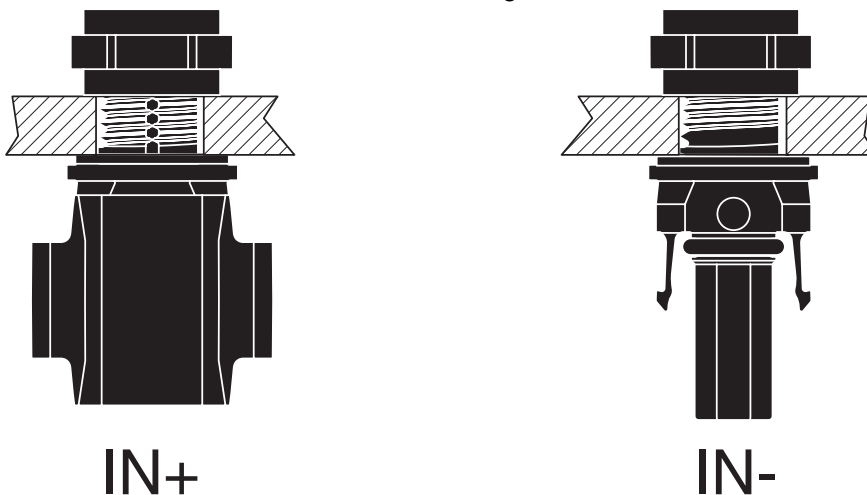

Connection of the PV strings


SOL-SC-1ST-0-DC-2MPPT-1001 - String combiner box (SCB)




2404299

<https://www.phoenixcontact.com/us/products/2404299>

Schematic diagram

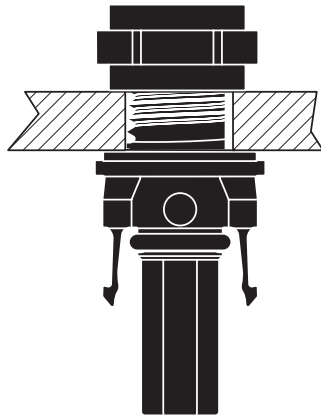

OUT+

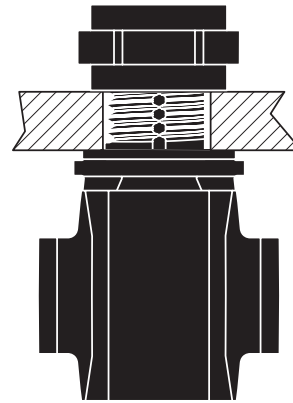

OUT-

Connection to the inverter

SOL-SC-1ST-0-DC-2MPPT-1001 - String combiner box (SCB)

2404299

<https://www.phoenixcontact.com/us/products/2404299>

Schematic diagram



Connection of the protective grounding conductor

SOL-SC-1ST-0-DC-2MPPT-1001 - String combiner box (SCB)

2404299

<https://www.phoenixcontact.com/us/products/2404299>

Schematic diagram




Connection of the protective equipotential bonding conductor

SOL-SC-1ST-0-DC-2MPPT-1001 - String combiner box (SCB)

2404299

<https://www.phoenixcontact.com/us/products/2404299>

Schematic diagram

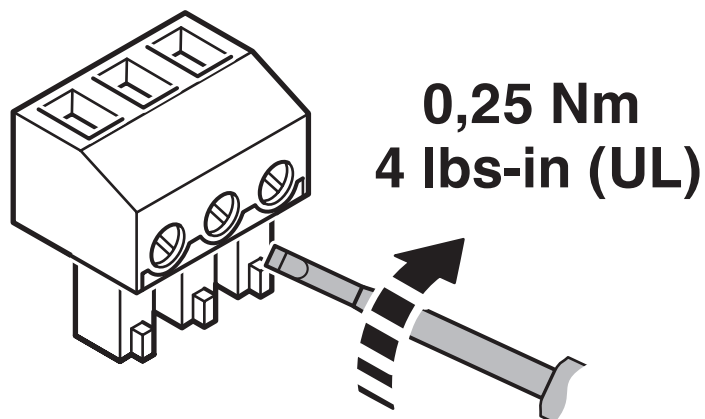

Connection of the remote indication contact on the surge protection

SOL-SC-1ST-0-DC-2MPPT-1001 - String combiner box (SCB)



2404299

<https://www.phoenixcontact.com/us/products/2404299>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27171490 |
| ECLASS-15.0 | 22570203 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC003857 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121100 |
|-------------|----------|

SOL-SC-1ST-0-DC-2MPPT-1001 - String combiner box (SCB)



2404299

<https://www.phoenixcontact.com/us/products/2404299>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com