

# LM-S-LS-H - Lightning monitoring system



2800616

<https://www.phoenixcontact.com/us/products/2800616>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Optical lightning sensor for the live monitoring system for the continuous detection and evaluation of lightning strikes. IP67 protection.



## Your advantages

- Optical lightning sensor for measuring current strength
- Robust design
- Resistant to vibrations, temperature, and humidity
- Good UV resistance

## Commercial data

Item number	2800616
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CL05
Product key	CLB311
GTIN	4046356615273
Weight per piece (including packing)	822.5 g
Weight per piece (excluding packing)	806.5 g
Customs tariff number	90303900
Country of origin	DE

# LM-S-LS-H - Lightning monitoring system

2800616

<https://www.phoenixcontact.com/us/products/2800616>

## Technical data

### Product properties

Product type	Sensor
Product family	LM-S

### Electrical properties

#### Evaluation unit Sensor interfaces

Interface	Fiber optic interface
Number of ports	1

#### Sensor

Detectable values (current strength)	$\pm 5.00 \text{ kA} \dots 400.00 \text{ kA}$
--------------------------------------	-----------------------------------------------

#### Sensor

Interface	Fiber optic interface
Connection method	SC-RJ socket with push/pull connector, IP67

### Dimensions

Dimensional drawing	
Width	155 mm
Height	290 mm
Depth	50 mm

### Material specifications

Color	black (RAL 9005)
Ferrule material	Zirconia ceramics
Housing material	XYRON 644Z

### Cable/line

#### FO cable

Fiber type	Quartz fiber
------------	--------------

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-30 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

# LM-S-LS-H - Lightning monitoring system



2800616

<https://www.phoenixcontact.com/us/products/2800616>

Altitude	≤ 4000 m (amsl)
Permissible humidity (operation)	30 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	30 % ... 95 % (non-condensing)

## Mounting

Mounting type	On lightning arrester cables
---------------	------------------------------

# LM-S-LS-H - Lightning monitoring system


2800616

<https://www.phoenixcontact.com/us/products/2800616>




## Drawings

Dimensional drawing

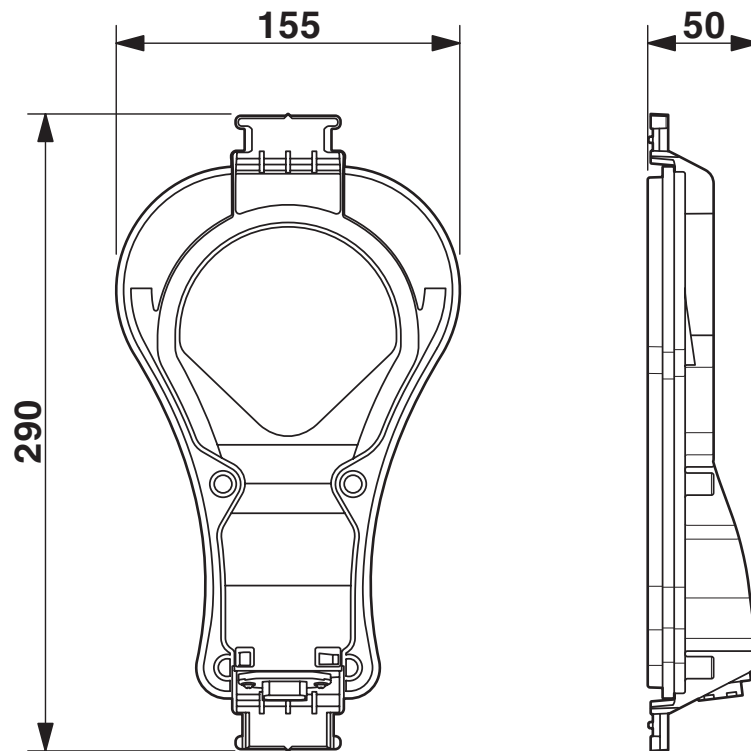

Schematic diagram

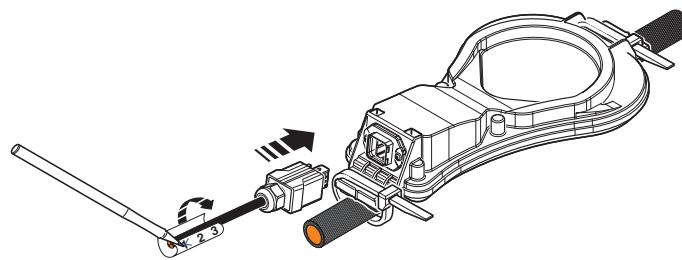

Marking of the connecting cable

# LM-S-LS-H - Lightning monitoring system



2800616

<https://www.phoenixcontact.com/us/products/2800616>

## Classifications

### ECLASS

ECLASS-13.0	27170192
ECLASS-15.0	27170192

### ETIM

ETIM 10.0	EC002495
-----------	----------

### UNSPSC

UNSPSC 21.0	39121600
-------------	----------

# LM-S-LS-H - Lightning monitoring system



2800616

<https://www.phoenixcontact.com/us/products/2800616>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
-----------------------------------------	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	Dodecamethylcyclohexasiloxane(CAS: 540-97-6)
SCIP	44d4c674-9fbf-438f-99b4-de4d993cf3ae

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)