

# PTN 4 - N disconnect terminal block



3213965

<https://www.phoenixcontact.com/us/products/3213965>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



## N disconnect terminal block, **Assembly instructions:**

For secure fastening of the neutral busbar, supports must be set at the beginning and end of each terminal strip as well as every 20 cm on longer terminal strips., nom. voltage: 250 V, nominal current: 32 A, Push-in connection, 1 level, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup> - 6 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: blue

## Your advantages

- Fast and reliable neutral conductor disconnection
- Secure latching of slide in end positions

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 3213965       |
| Packing unit                         | 50 pc         |
| Minimum order quantity               | 50 pc         |
| Sales key                            | BE22          |
| Product key                          | BE2252        |
| GTIN                                 | 4046356609470 |
| Weight per piece (including packing) | 11.12 g       |
| Weight per piece (excluding packing) | 11.12 g       |
| Customs tariff number                | 85369010      |
| Country of origin                    | PL            |

# PTN 4 - N disconnect terminal block



3213965

<https://www.phoenixcontact.com/us/products/3213965>

## Technical data

### Notes

|         |   |
|---------|---|
| General | <b>Assembly instructions:</b><br>For secure fastening of the neutral busbar, supports must be set at the beginning and end of each terminal strip as well as every 20 cm on longer terminal strips. |
|---------|---|

### Product properties

|                       |                             |
|-----------------------|-----------------------------|
| Product type          | Installation terminal block |
| Number of connections | 2                           |
| Number of rows        | 1                           |
| Potentials            | 1                           |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|   |        |
|---|--------|
| Rated surge voltage                             | 6 kV   |
| Maximum power dissipation for nominal condition | 1.02 W |
| Current carrying capacity of the neutral busbar | 140 A  |

### Connection data

|                                 |                   |
|---------------------------------|-------------------|
| Number of connections per level | 2                 |
| Nominal cross section           | 4 mm <sup>2</sup> |

#### 1 level

|   |   |
|---|---|
| Connection method   | Push-in connection                                    |
| Stripping length  | 10 mm ... 12 mm                                       |
| Internal cylindrical gage   | A4  |
| Connection in acc. with standard  | IEC 60947-7-1   |
| Conductor cross-section rigid   | 0.2 mm <sup>2</sup> ... 6 mm <sup>2</sup>             |
| Cross section AWG   | 24 ... 10 (converted acc. to IEC)                     |
| Conductor cross-section flexible  | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>             |
| Conductor cross-section, flexible [AWG]   | 24 ... 12 (converted acc. to IEC)                     |
| Conductor cross-section flexible (ferrule without plastic sleeve)                         | 0.25 mm <sup>2</sup> ... 4 mm <sup>2</sup>            |
| Flexible conductor cross-section (ferrule with plastic sleeve)                            | 0.25 mm <sup>2</sup> ... 4 mm <sup>2</sup>            |
| 2 conductors with same cross section, rigid   | 0.2 mm <sup>2</sup> ... 2 mm <sup>2</sup>             |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm <sup>2</sup> ... 1 mm <sup>2</sup>             |
| Nominal cross section   | 4 mm <sup>2</sup>                                     |
| Nominal current   | 32 A  |
| Maximum load current  | 32 A (with 6 mm <sup>2</sup> conductor cross-section) |
| Nominal voltage   | 250 V   |

# PTN 4 - N disconnect terminal block



3213965

<https://www.phoenixcontact.com/us/products/3213965>

1 level Connection cross sections directly pluggable

|   |   |
|---|---|
| Conductor cross-section rigid                                     | 0.5 mm <sup>2</sup> ... 6 mm <sup>2</sup> |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup> |
| Flexible conductor cross-section (ferrule with plastic sleeve)    | 0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup> |

## Dimensions

|                    |         |
|--------------------|---------|
| Width              | 6.2 mm  |
| End cover width    | 2.2 mm  |
| Height             | 66 mm   |
| Depth              | 44.8 mm |
| Depth on NS 35/7,5 | 46.3 mm |
| Depth on NS 35/15  | 53.8 mm |

## Material specifications

|   |                 |
|---|-----------------|
| Color   | blue (RAL 5015) |
| Flammability rating according to UL 94                                  | V0              |
| Insulating material group   | I               |
| Insulating material   | PA              |
| Static insulating material application in cold                          | -60 °C          |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C          |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C          |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3     |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3     |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3     |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3     |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 28 MJ/kg        |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed          |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed          |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed          |

## Electrical tests

### Surge voltage test

|                       |             |
|-----------------------|-------------|
| Test voltage setpoint | 4.8 kV      |
| Result                | Test passed |

### Temperature-rise test

|  |                                |
|--|--------------------------------|
| Requirement temperature-rise test              | Increase in temperature ≤ 45 K |
| Result   | Test passed                    |
| Short-time withstand current 4 mm <sup>2</sup> | 0.48 kA                        |
| Short-time withstand current 6 mm <sup>2</sup> | 0.72 kA                        |
| Result   | Test passed                    |

### Power-frequency withstand voltage

# PTN 4 - N disconnect terminal block



3213965

<https://www.phoenixcontact.com/us/products/3213965>

|                       |             |
|-----------------------|-------------|
| Test voltage setpoint | 1.5 kV      |
| Result                | Test passed |

## Mechanical properties

### Mechanical data

|                 |     |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

## Mechanical tests

### Mechanical strength

|        |             |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

### Attachment on the carrier

|                         |             |
|-------------------------|-------------|
| DIN rail/fixing support | NS 35       |
| Test force setpoint     | 1 N         |
| Result                  | Test passed |

### Test for conductor damage and slacking

|                                |                              |
|--------------------------------|------------------------------|
| Rotation speed                 | 10 rpm                       |
| Revolutions                    | 135                          |
| Conductor cross-section/weight | 0.2 mm <sup>2</sup> / 0.2 kg |
|                                | 4 mm <sup>2</sup> / 0.9 kg   |
|                                | 6 mm <sup>2</sup> / 1.4 kg   |
| Result                         | Test passed                  |

## Environmental and real-life conditions

### Aging

|                    |             |
|--------------------|-------------|
| Temperature cycles | 192         |
| Result             | Test passed |

### Needle-flame test

|                  |             |
|------------------|-------------|
| Time of exposure | 30 s        |
| Result           | Test passed |

### Oscillation/broadband noise

|                        |  |
|------------------------|--|
| Specification          | DIN EN 50155 (VDE 0115-200):2008-03            |
| Spectrum               | Long life test category 2, bogie-mounted       |
| Frequency              | $f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$ |
| ASD level              | 6.12 (m/s <sup>2</sup> ) <sup>2</sup> /Hz      |
| Acceleration           | 3.12g  |
| Test duration per axis | 5 h  |
| Test directions        | X-, Y- and Z-axis                              |
| Result                 | Test passed                                    |

### Shocks

|               |                                     |
|---------------|-------------------------------------|
| Specification | DIN EN 50155 (VDE 0115-200):2008-03 |
|---------------|-------------------------------------|

# PTN 4 - N disconnect terminal block



3213965

<https://www.phoenixcontact.com/us/products/3213965>

|                                |                                   |
|--------------------------------|-----------------------------------|
| Pulse shape                    | Half-sine                         |
| Acceleration                   | 30g                               |
| Shock duration                 | 18 ms                             |
| Number of shocks per direction | 3                                 |
| Test directions                | X-, Y- and Z-axis (pos. and neg.) |
| Result                         | Test passed                       |

## Ambient conditions

|  |  |
|--|--|
| Ambient temperature (operation)          | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)  |
| Ambient temperature (assembly)           | -5 °C ... 70 °C  |
| Ambient temperature (actuation)          | -5 °C ... 70 °C  |
| Permissible humidity (operation)         | 20 % ... 90 %  |
| Permissible humidity (storage/transport) | 30 % ... 70 %  |

## Standards and regulations

|                                  |               |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-1 |
|----------------------------------|---------------|

## Mounting

|               |           |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
|               | NS 35/15  |

# PTN 4 - N disconnect terminal block


3213965

<https://www.phoenixcontact.com/us/products/3213965>



## Drawings

### Circuit diagram

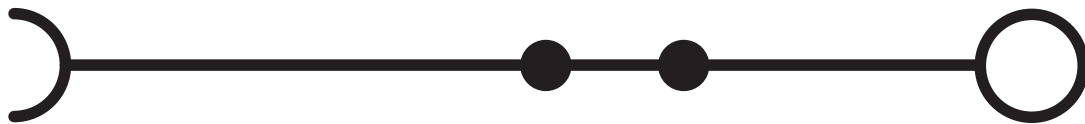

# PTN 4 - N disconnect terminal block



3213965

<https://www.phoenixcontact.com/us/products/3213965>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3213965>

### DNV

Approval ID: TAE00001BU



### IECEE CB Scheme

Approval ID: DE1-62969



### EAC

Approval ID: RU C-DE.BL08.B.00644



### VDE Zeichengenehmigung

Approval ID: 40040549

# PTN 4 - N disconnect terminal block



3213965

<https://www.phoenixcontact.com/us/products/3213965>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27250111 |
| ECLASS-15.0 | 27250111 |

### ETIM

|           |          |
|-----------|----------|
| ETIM 10.0 | EC001257 |
|-----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# PTN 4 - N disconnect terminal block



3213965

<https://www.phoenixcontact.com/us/products/3213965>

## Environmental product compliance

### EU RoHS

|   |                    |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

### China RoHS

|  |  |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E                                   |
|  | No hazardous substances above the limits |

### EU REACH SVHC

|                                     |                            |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)